
Akka Java Documentation

Release 2.2.5

Typesafe Inc

February 19, 2015

1	Introduction	1
1.1	What is Akka?	1
1.2	Why Akka?	3
1.3	Getting Started	3
1.4	The Obligatory Hello World	7
1.5	Use-case and Deployment Scenarios	8
1.6	Examples of use-cases for Akka	9
2	General	10
2.1	Terminology, Concepts	10
2.2	Actor Systems	12
2.3	What is an Actor?	14
2.4	Supervision and Monitoring	16
2.5	Actor References, Paths and Addresses	19
2.6	Location Transparency	25
2.7	Akka and the Java Memory Model	26
2.8	Message Delivery Guarantees	28
2.9	Configuration	33
3	Actors	65
3.1	Actors	65
3.2	Typed Actors	84
3.3	Fault Tolerance	88
3.4	Dispatchers	103
3.5	Mailboxes	106
3.6	Routing	111
3.7	Building Finite State Machine Actors	126
3.8	Testing Actor Systems	129
4	Futures and Agents	143
4.1	Futures	143
4.2	Software Transactional Memory	151
4.3	Agents	152
4.4	Transactors	154
5	Networking	158
5.1	Cluster Specification	158
5.2	Cluster Usage	166
5.3	Remoting	193
5.4	Serialization	213
5.5	I/O	219
5.6	Encoding and decoding binary data	221
5.7	Using TCP	229
5.8	Using UDP	242
5.9	ZeroMQ	245

5.10	Camel	250
6	Utilities	268
6.1	Event Bus	268
6.2	Logging	271
6.3	Scheduler	276
6.4	Duration	279
6.5	Circuit Breaker	280
6.6	Akka Extensions	283
6.7	Durable Mailboxes	286
6.8	Microkernel	289
7	HowTo: Common Patterns	293
7.1	Scheduling Periodic Messages	293
7.2	Single-Use Actor Trees with High-Level Error Reporting	294
7.3	Template Pattern	297
8	Experimental Modules	298
8.1	Multi Node Testing	298
8.2	External Contributions	303
9	Information for Akka Developers	323
9.1	Building Akka	323
9.2	Multi JVM Testing	325
9.3	I/O Layer Design	329
9.4	Developer Guidelines	330
9.5	Documentation Guidelines	332
9.6	Team	334
10	Project Information	335
10.1	Migration Guides	335
10.2	Issue Tracking	341
10.3	Licenses	342
10.4	Sponsors	342
10.5	Project	342
11	Additional Information	345
11.1	Books	345
11.2	Here is a list of recipes for all things Akka	345
11.3	Other Language Bindings	345
11.4	Akka in OSGi	345
11.5	Incomplete List of HTTP Frameworks	346

INTRODUCTION

1.1 What is Akka?

Scalable real-time transaction processing

We believe that writing correct concurrent, fault-tolerant and scalable applications is too hard. Most of the time it's because we are using the wrong tools and the wrong level of abstraction. Akka is here to change that. Using the Actor Model we raise the abstraction level and provide a better platform to build correct, concurrent, and scalable applications. For fault-tolerance we adopt the "Let it crash" model which the telecom industry has used with great success to build applications that self-heal and systems that never stop. Actors also provide the abstraction for transparent distribution and the basis for truly scalable and fault-tolerant applications.

Akka is Open Source and available under the Apache 2 License.

Download from <http://typesafe.com/stack/downloads/akka/>

Please note that all code samples compile, so if you want direct access to the sources, have a look over at the [Akka Docs Project](#).

1.1.1 Akka implements a unique hybrid

Actors

Actors give you:

- Simple and high-level abstractions for concurrency and parallelism.
- Asynchronous, non-blocking and highly performant event-driven programming model.
- Very lightweight event-driven processes (approximately 2.7 million actors per GB RAM).

See *Actors (Scala)* and *Untyped Actors (Java)*

Fault Tolerance

- Supervisor hierarchies with "let-it-crash" semantics.
- Supervisor hierarchies can span over multiple JVMs to provide truly fault-tolerant systems.
- Excellent for writing highly fault-tolerant systems that self-heal and never stop.

See *Fault Tolerance (Scala)* and *Fault Tolerance (Java)*

Location Transparency

Everything in Akka is designed to work in a distributed environment: all interactions of actors use pure message passing and everything is asynchronous.

For an overview of the remoting see *Location Transparency*

Transactors

Transactors combine actors and Software Transactional Memory (STM) into transactional actors. It allows you to compose atomic message flows with automatic retry and rollback.

See *Transactors (Scala)* and *Transactors (Java)*

1.1.2 Scala and Java APIs

Akka has both a *scala-api* and a *Java Documentation*.

1.1.3 Akka can be used in two different ways

- As a library: used by a web app, to be put into `WEB-INF/lib` or as a regular JAR on your classpath.
- As a microkernel: stand-alone kernel to drop your application into.

See the *Use-case and Deployment Scenarios* for details.

1.1.4 What happened to Cloudy Akka?

The commercial offering was earlier referred to as Cloudy Akka. This offering consisted of two things:

- Cluster support for Akka
- Monitoring & Management (formerly called Atmos)

Cloudy Akka has been discontinued and the Cluster support is now being moved into the Open Source version of Akka (the upcoming Akka 2.1), while Monitoring & Management (Atmos) has been re-branded as the Typesafe Console, which is now part of the commercial subscription for the Typesafe Stack (see below for details).

1.1.5 Typesafe Stack

Akka is now also part of the [Typesafe Stack](#).

The Typesafe Stack is a modern software platform that makes it easy for developers to build scalable software applications. It combines the Scala programming language, Akka, the Play! web framework and robust developer tools in a simple package that integrates seamlessly with existing Java infrastructure.

The Typesafe Stack is all fully open source.

1.1.6 Typesafe Console

On top of the Typesafe Stack we also have a commercial product called Typesafe Console which provides the following features:

1. Slick Web UI with real-time view into the system
2. Management through Dashboard, JMX and REST
3. Dapper-style tracing of messages across components and remote nodes
4. Real-time statistics
5. Very low overhead monitoring agents (should always be on in production)
6. Consolidation of statistics and logging information to a single node
7. Storage of statistics data for later processing
8. Provisioning and rolling upgrades

Read more [here](#).

1.2 Why Akka?

1.2.1 What features can the Akka platform offer, over the competition?

Akka provides scalable real-time transaction processing.

Akka is an unified runtime and programming model for:

- Scale up (Concurrency)
- Scale out (Remoting)
- Fault tolerance

One thing to learn and admin, with high cohesion and coherent semantics.

Akka is a very scalable piece of software, not only in the context of performance but also in the size of applications it is useful for. The core of Akka, akka-actor, is very small and easily dropped into an existing project where you need asynchronicity and lockless concurrency without hassle.

You can choose to include only the parts of akka you need in your application and then there's the whole package, the Akka Microkernel, which is a standalone container to deploy your Akka application in. With CPUs growing more and more cores every cycle, Akka is the alternative that provides outstanding performance even if you're only running it on one machine. Akka also supplies a wide array of concurrency-paradigms, allowing users to choose the right tool for the job.

1.2.2 What's a good use-case for Akka?

We see Akka being adopted by many large organizations in a big range of industries:

- Investment and Merchant Banking
- Retail
- Social Media
- Simulation
- Gaming and Betting
- Automobile and Traffic Systems
- Health Care
- Data Analytics

and much more. Any system with the need for high-throughput and low latency is a good candidate for using Akka.

Actors let you manage service failures (Supervisors), load management (back-off strategies, timeouts and processing-isolation), as well as both horizontal and vertical scalability (add more cores and/or add more machines).

Here's what some of the Akka users have to say about how they are using Akka: <http://stackoverflow.com/questions/4493001/good-use-case-for-akka>

All this in the ApacheV2-licensed open source project.

1.3 Getting Started

1.3.1 Prerequisites

Akka requires that you have [Java 1.6](#) or later installed on you machine.

1.3.2 Getting Started Guides and Template Projects

The best way to start learning Akka is to download [Typesafe Activator](#) and try out one of Akka Template Projects.

1.3.3 Download

There are several ways to download Akka. You can download it as part of the Typesafe Platform (as described above). You can download the full distribution with microkernel, which includes all modules. Or you can use a build tool like Maven or SBT to download dependencies from the Akka Maven repository.

1.3.4 Modules

Akka is very modular and consists of several JARs containing different features.

- `akka-actor` – Classic Actors, Typed Actors, IO Actor etc.
- `akka-agent` – Agents, integrated with Scala STM
- `akka-camel` – Apache Camel integration
- `akka-cluster` – Cluster membership management, elastic routers.
- `akka-dataflow` – add-on to SIP-14 futures supporting implicit continuation-passing style
- `akka-file-mailbox` – Akka durable mailbox (find more among community projects)
- `akka-kernel` – Akka microkernel for running a bare-bones mini application server
- `akka-mailboxes-common` – common infrastructure for implementing durable mailboxes
- `akka-osgi` – base bundle for using Akka in OSGi containers, containing the `akka-actor` classes
- `akka-osgi-aries` – Aries blueprint for provisioning actor systems
- `akka-remote` – Remote Actors
- `akka-slf4j` – SLF4J Logger (event bus listener)
- `akka-testkit` – Toolkit for testing Actor systems
- `akka-transactor` – Transactors - transactional actors, integrated with Scala STM
- `akka-zeromq` – ZeroMQ integration

In addition to these stable modules there are several which are on their way into the stable core but are still marked “experimental” at this point. This does not mean that they do not function as intended, it primarily means that their API has not yet solidified enough in order to be considered frozen. You can help accelerating this process by giving feedback on these modules on our mailing list.

- `akka-channels-experimental` – Typed Channels on top of untyped Actors, using Scala 2.10 macros
- `akka-contrib` – an assortment of contributions which may or may not be moved into core modules, see [External Contributions](#) for more details.

The filename of the actual JAR is for example `akka-actor_2.10-2.2.5.jar` (and analog for the other modules).

How to see the JARs dependencies of each Akka module is described in the [Dependencies](#) section.

1.3.5 Using a release distribution

Download the release you need from <http://typesafe.com/stack/downloads/akka> and unzip it.

1.3.6 Using a snapshot version

The Akka nightly snapshots are published to <http://repo.akka.io/snapshots/> and are versioned with both SNAPSHOT and timestamps. You can choose a timestamped version to work with and can decide when to update to a newer version. The Akka snapshots repository is also proxied through <http://repo.typesafe.com/typesafe/snapshots/> which includes proxies for several other repositories that Akka modules depend on.

Warning: The use of Akka SNAPSHOTs, nightlies and milestone releases is discouraged unless you know what you are doing.

1.3.7 Microkernel

The Akka distribution includes the microkernel. To run the microkernel put your application jar in the `deploy` directory and use the scripts in the `bin` directory.

More information is available in the documentation of the *Microkernel (Scala)* / *Microkernel (Java)*.

1.3.8 Using a build tool

Akka can be used with build tools that support Maven repositories.

1.3.9 Maven repositories

For Akka version 2.1-M2 and onwards:

[Maven Central](#)

For previous Akka versions:

[Akka Repo](#) [Typesafe Repo](#)

1.3.10 Using Akka with Maven

The simplest way to get started with Akka and Maven is to check out the [Akka/Maven template](#) project.

Since Akka is published to Maven Central (for versions since 2.1-M2), is it enough to add the Akka dependencies to the POM. For example, here is the dependency for akka-actor:

```
<dependency>
  <groupId>com.typesafe.akka</groupId>
  <artifactId>akka-actor_2.10</artifactId>
  <version>2.2.5</version>
</dependency>
```

Note: for snapshot versions both SNAPSHOT and timestamped versions are published.

1.3.11 Using Akka with SBT

The simplest way to get started with Akka and SBT is to check out the [Akka/SBT template](#) project.

Summary of the essential parts for using Akka with SBT:

SBT installation instructions on <https://github.com/harrah/xsbt/wiki/Setup>

`build.sbt` file:

```
name := "My Project"

version := "1.0"

scalaVersion := "2.10.2"

resolvers += "Typesafe Repository" at "http://repo.typesafe.com/typesafe/releases/"

libraryDependencies +=
  "com.typesafe.akka" %% "akka-actor" % "2.2.5"
```

Note: the libraryDependencies setting above is specific to SBT v0.12.x and higher. If you are using an older version of SBT, the libraryDependencies should look like this:

```
libraryDependencies +=
  "com.typesafe.akka" % "akka-actor_2.10" % "2.2.5"
```

1.3.12 Using Akka with Gradle

Requires at least Gradle 1.4 Uses the Scala plugin

```
apply plugin: 'scala'

repositories {
  mavenCentral()
}

dependencies {
  compile 'org.scala-lang:scala-library:2.10.2'
}

tasks.withType(ScalaCompile) {
  scalaCompileOptions.useAnt = false
}

dependencies {
  compile group: 'com.typesafe.akka', name: 'akka-actor_2.10', version: '2.2.5'
  compile group: 'org.scala-lang', name: 'scala-library', version: '2.10.2'
}
```

1.3.13 Using Akka with Eclipse

Setup SBT project and then use `sbteclipse` to generate a Eclipse project.

1.3.14 Using Akka with IntelliJ IDEA

Setup SBT project and then use `sbt-idea` to generate a IntelliJ IDEA project.

1.3.15 Using Akka with NetBeans

Setup SBT project and then use `sbt-netbeans-plugin` to generate a NetBeans project.

1.3.16 Do not use -optimize Scala compiler flag

Warning: Akka has not been compiled or tested with -optimize Scala compiler flag. Strange behavior has been reported by users that have tried it.

1.3.17 Build from sources

Akka uses Git and is hosted at [Github](#).

- Akka: clone the Akka repository from <http://github.com/akka/akka>

Continue reading the page on *Building Akka*

1.3.18 Need help?

If you have questions you can get help on the [Akka Mailing List](#).

You can also ask for [commercial support](#).

Thanks for being a part of the Akka community.

1.4 The Obligatory Hello World

Since every programming paradigm needs to solve the tough problem of printing a well-known greeting to the console we'll introduce you to the actor-based version.

```
import akka.actor.Props;
import akka.actor.UntypedActor;
import akka.actor.ActorRef;

public class HelloWorld extends UntypedActor {

    @Override
    public void preStart() {
        // create the greeter actor
        final ActorRef greeter =
            getContext().actorOf(Props.create(Greeter.class), "greeter");
        // tell it to perform the greeting
        greeter.tell(Greeter.Msg.GREET, getSelf());
    }

    @Override
    public void onReceive(Object msg) {
        if (msg == Greeter.Msg.DONE) {
            // when the greeter is done, stop this actor and with it the application
            getContext().stop(getSelf());
        } else unhandled(msg);
    }
}
```

The `HelloWorld` actor is the application's "main" class; when it terminates the application will shut down—more on that later. The main business logic happens in the `preStart` method, where a `Greeter` actor is created and instructed to issue that greeting we crave for. When the greeter is done it will tell us so by sending back a message, and when that message has been received it will be passed into the `onReceive` method where we can conclude the demonstration by stopping the `HelloWorld` actor. You will be very curious to see how the `Greeter` actor performs the actual task:

```
public class Greeter extends UntypedActor {

    public static enum Msg {
        GREET, DONE;
    }

    @Override
    public void onReceive(Object msg) {
        if (msg == Msg.GREET) {
            System.out.println("Hello World!");
            getSender().tell(Msg.DONE, getSelf());
        } else unhandled(msg);
    }
}
```

This is extremely simple now: after its creation this actor will not do anything until someone sends it a message, and if that happens to be an invitation to greet the world then the `Greeter` complies and informs the requester that the deed has been done.

As a Java developer you will probably want to tell us that there is no static `public void main(...)` anywhere in these classes, so how do we run this program? The answer is that the appropriate `main` method is implemented in the generic launcher class `akka.Main` which expects only one command line argument: the class name of the application's main actor. This `main` method will then create the infrastructure needed for running the actors, start the given main actor and arrange for the whole application to shut down once the main actor terminates. Thus you will be able to run the above code with a command similar to the following:

```
java -classpath <all those JARs> akka.Main com.example.HelloWorld
```

This conveniently assumes placement of the above class definitions in package `com.example` and it further assumes that you have the required JAR files for `scala-library` and `akka-actor` available. The easiest would be to manage these dependencies with a build tool, see *Using a build tool*.

1.5 Use-case and Deployment Scenarios

1.5.1 How can I use and deploy Akka?

Akka can be used in different ways:

- As a library: used as a regular JAR on the classpath and/or in a web app, to be put into `WEB-INF/lib`
- As a stand alone application by instantiating `ActorSystem` in a main class or using the *Microkernel (Scala) / Microkernel (Java)*

Using Akka as library

This is most likely what you want if you are building Web applications. There are several ways you can use Akka in Library mode by adding more and more modules to the stack.

Using Akka as a stand alone microkernel

Akka can also be run as a stand-alone microkernel. See *Microkernel (Scala) / Microkernel (Java)* for more information.

1.6 Examples of use-cases for Akka

We see Akka being adopted by many large organizations in a big range of industries all from investment and merchant banking, retail and social media, simulation, gaming and betting, automobile and traffic systems, health care, data analytics and much more. Any system that have the need for high-throughput and low latency is a good candidate for using Akka.

There is a great discussion on use-cases for Akka with some good write-ups by production users [here](#)

1.6.1 Here are some of the areas where Akka is being deployed into production

Transaction processing (Online Gaming, Finance/Banking, Trading, Statistics, Betting, Social Media, Telecom)

Scale up, scale out, fault-tolerance / HA

Service backend (any industry, any app)

Service REST, SOAP, Cometd, WebSockets etc Act as message hub / integration layer Scale up, scale out, fault-tolerance / HA

Concurrency/parallelism (any app)

Correct Simple to work with and understand Just add the jars to your existing JVM project (use Scala, Java, Groovy or JRuby)

Simulation

Master/Worker, Compute Grid, MapReduce etc.

Batch processing (any industry)

Camel integration to hook up with batch data sources Actors divide and conquer the batch workloads

Communications Hub (Telecom, Web media, Mobile media)

Scale up, scale out, fault-tolerance / HA

Gaming and Betting (MOM, online gaming, betting)

Scale up, scale out, fault-tolerance / HA

Business Intelligence/Data Mining/general purpose crunching

Scale up, scale out, fault-tolerance / HA

Complex Event Stream Processing

Scale up, scale out, fault-tolerance / HA

2.1 Terminology, Concepts

In this chapter we attempt to establish a common terminology to define a solid ground for communicating about concurrent, distributed systems which Akka targets. Please note that, for many of these terms, there is no single agreed definition. We simply seek to give working definitions that will be used in the scope of the Akka documentation.

2.1.1 Concurrency vs. Parallelism

Concurrency and parallelism are related concepts, but there are small differences. *Concurrency* means that two or more tasks are making progress even though they might not be executing simultaneously. This can for example be realized with time slicing where parts of tasks are executed sequentially and mixed with parts of other tasks. *Parallelism* on the other hand arise when the execution can be truly simultaneous.

2.1.2 Asynchronous vs. Synchronous

A method call is considered *synchronous* if the caller cannot make progress until the method returns a value or throws an exception. On the other hand, an *asynchronous* call allows the caller to progress after a finite number of steps, and the completion of the method may be signalled via some additional mechanism (it might be a registered callback, a Future, or a message).

A synchronous API may use blocking to implement synchrony, but this is not a necessity. A very CPU intensive task might give a similar behavior as blocking. In general, it is preferred to use asynchronous APIs, as they guarantee that the system is able to progress. Actors are asynchronous by nature: an actor can progress after a message send without waiting for the actual delivery to happen.

2.1.3 Non-blocking vs. Blocking

We talk about *blocking* if the delay of one thread can indefinitely delay some of the other threads. A good example is a resource which can be used exclusively by one thread using mutual exclusion. If a thread holds on to the resource indefinitely (for example accidentally running an infinite loop) other threads waiting on the resource can not progress. In contrast, *non-blocking* means that no thread is able to indefinitely delay others.

Non-blocking operations are preferred to blocking ones, as the overall progress of the system is not trivially guaranteed when it contains blocking operations.

2.1.4 Deadlock vs. Starvation vs. Live-lock

Deadlock arises when several participants are waiting on each other to reach a specific state to be able to progress. As none of them can progress without some other participant to reach a certain state (a “Catch-22” problem) all affected subsystems stall. Deadlock is closely related to *blocking*, as it is necessary that a participant thread be able to delay the progression of other threads indefinitely.

In the case of *deadlock*, no participants can make progress, while in contrast *Starvation* happens, when there are participants that can make progress, but there might be one or more that cannot. Typical scenario is the case of a naive scheduling algorithm that always selects high-priority tasks over low-priority ones. If the number of incoming high-priority tasks is constantly high enough, no low-priority ones will be ever finished.

Livelock is similar to *deadlock* as none of the participants make progress. The difference though is that instead of being frozen in a state of waiting for others to progress, the participants continuously change their state. An example scenario when two participants have two identical resources available. They each try to get the resource, but they also check if the other needs the resource, too. If the resource is requested by the other participant, they try to get the other instance of the resource. In the unfortunate case it might happen that the two participants “bounce” between the two resources, never acquiring it, but always yielding to the other.

2.1.5 Race Condition

We call it a *Race condition* when an assumption about the ordering of a set of events might be violated by external non-deterministic effects. Race conditions often arise when multiple threads have a shared mutable state, and the operations of thread on the state might be interleaved causing unexpected behavior. While this is a common case, shared state is not necessary to have race conditions. One example could be a client sending unordered packets (e.g UDP datagrams) P1, P2 to a server. As the packets might potentially travel via different network routes, it is possible that the server receives P2 first and P1 afterwards. If the messages contain no information about their sending order it is impossible to determine by the server that they were sent in a different order. Depending on the meaning of the packets this can cause race conditions.

Note: The only guarantee that Akka provides about messages sent between a given pair of actors is that their order is always preserved. see [Message Delivery Guarantees](#)

2.1.6 Non-blocking Guarantees (Progress Conditions)

As discussed in the previous sections blocking is undesirable for several reasons, including the dangers of deadlocks and reduced throughput in the system. In the following sections we discuss various non-blocking properties with different strength.

Wait-freedom

A method is *wait-free* if every call is guaranteed to finish in a finite number of steps. If a method is *bounded wait-free* then the number of steps has a finite upper bound.

From this definition it follows that wait-free methods are never blocking, therefore deadlock can not happen. Additionally, as each participant can progress after a finite number of steps (when the call finishes), wait-free methods are free of starvation.

Lock-freedom

Lock-freedom is a weaker property than *wait-freedom*. In the case of lock-free calls, infinitely often some method finishes in a finite number of steps. This definition implies that no deadlock is possible for lock-free calls. On the other hand, the guarantee that *some call finishes* in a finite number of steps is not enough to guarantee that *all of them eventually finish*. In other words, lock-freedom is not enough to guarantee the lack of starvation.

Obstruction-freedom

Obstruction-freedom is the weakest non-blocking guarantee discussed here. A method is called *obstruction-free* if there is a point in time after which it executes in isolation (other threads make no steps, e.g.: become suspended), it finishes in a bounded number of steps. All lock-free objects are obstruction-free, but the opposite is generally not true.

Optimistic concurrency control (OCC) methods are usually obstruction-free. The OCC approach is that every participant tries to execute its operation on the shared object, but if a participant detects conflicts from others, it rolls back the modifications, and tries again according to some schedule. If there is a point in time, where one of the participants is the only one trying, the operation will succeed.

2.1.7 Recommended literature

- The Art of Multiprocessor Programming, M. Herlihy and N Shavit, 2008. ISBN 978-0123705914
- Java Concurrency in Practice, B. Goetz, T. Peierls, J. Bloch, J. Bowbeer, D. Holmes and D. Lea, 2006. ISBN 978-0321349606

2.2 Actor Systems

Actors are objects which encapsulate state and behavior, they communicate exclusively by exchanging messages which are placed into the recipient's mailbox. In a sense, actors are the most stringent form of object-oriented programming, but it serves better to view them as persons: while modeling a solution with actors, envision a group of people and assign sub-tasks to them, arrange their functions into an organizational structure and think about how to escalate failure (all with the benefit of not actually dealing with people, which means that we need not concern ourselves with their emotional state or moral issues). The result can then serve as a mental scaffolding for building the software implementation.

Note: An ActorSystem is a heavyweight structure that will allocate 1...N Threads, so create one per logical application.

2.2.1 Hierarchical Structure

Like in an economic organization, actors naturally form hierarchies. One actor, which is to oversee a certain function in the program might want to split up its task into smaller, more manageable pieces. For this purpose it starts child actors which it supervises. While the details of supervision are explained [here](#), we shall concentrate on the underlying concepts in this section. The only prerequisite is to know that each actor has exactly one supervisor, which is the actor that created it.

The quintessential feature of actor systems is that tasks are split up and delegated until they become small enough to be handled in one piece. In doing so, not only is the task itself clearly structured, but the resulting actors can be reasoned about in terms of which messages they should process, how they should react normally and how failure should be handled. If one actor does not have the means for dealing with a certain situation, it sends a corresponding failure message to its supervisor, asking for help. The recursive structure then allows to handle failure at the right level.

Compare this to layered software design which easily devolves into defensive programming with the aim of not leaking any failure out: if the problem is communicated to the right person, a better solution can be found than if trying to keep everything "under the carpet".

Now, the difficulty in designing such a system is how to decide who should supervise what. There is of course no single best solution, but there are a few guidelines which might be helpful:

- If one actor manages the work another actor is doing, e.g. by passing on sub-tasks, then the manager should supervise the child. The reason is that the manager knows which kind of failures are expected and how to handle them.
- If one actor carries very important data (i.e. its state shall not be lost if avoidable), this actor should source out any possibly dangerous sub-tasks to children it supervises and handle failures of these children as appropriate. Depending on the nature of the requests, it may be best to create a new child for each request, which simplifies state management for collecting the replies. This is known as the "Error Kernel Pattern" from Erlang.

- If one actor depends on another actor for carrying out its duty, it should watch that other actor's liveness and act upon receiving a termination notice. This is different from supervision, as the watching party has no influence on the supervisor strategy, and it should be noted that a functional dependency alone is not a criterion for deciding where to place a certain child actor in the hierarchy.

There are of course always exceptions to these rules, but no matter whether you follow the rules or break them, you should always have a reason.

2.2.2 Configuration Container

The actor system as a collaborating ensemble of actors is the natural unit for managing shared facilities like scheduling services, configuration, logging, etc. Several actor systems with different configuration may co-exist within the same JVM without problems, there is no global shared state within Akka itself. Couple this with the transparent communication between actor systems—within one node or across a network connection—to see that actor systems themselves can be used as building blocks in a functional hierarchy.

2.2.3 Actor Best Practices

1. Actors should be like nice co-workers: do their job efficiently without bothering everyone else needlessly and avoid hogging resources. Translated to programming this means to process events and generate responses (or more requests) in an event-driven manner. Actors should not block (i.e. passively wait while occupying a Thread) on some external entity—which might be a lock, a network socket, etc.—unless it is unavoidable; in the latter case see below.
2. Do not pass mutable objects between actors. In order to ensure that, prefer immutable messages. If the encapsulation of actors is broken by exposing their mutable state to the outside, you are back in normal Java concurrency land with all the drawbacks.
3. Actors are made to be containers for behavior and state, embracing this means to not routinely send behavior within messages (which may be tempting using Scala closures). One of the risks is to accidentally share mutable state between actors, and this violation of the actor model unfortunately breaks all the properties which make programming in actors such a nice experience.
4. Top-level actors are the innermost part of your Error Kernel, so create them sparingly and prefer truly hierarchical systems. This has benefits with respect to fault-handling (both considering the granularity of configuration and the performance) and it also reduces the strain on the guardian actor, which is a single point of contention if over-used.

2.2.4 Blocking Needs Careful Management

In some cases it is unavoidable to do blocking operations, i.e. to put a thread to sleep for an indeterminate time, waiting for an external event to occur. Examples are legacy RDBMS drivers or messaging APIs, and the underlying reason is typically that (network) I/O occurs under the covers. When facing this, you may be tempted to just wrap the blocking call inside a `Future` and work with that instead, but this strategy is too simple: you are quite likely to find bottlenecks or run out of memory or threads when the application runs under increased load.

The non-exhaustive list of adequate solutions to the “blocking problem” includes the following suggestions:

- Do the blocking call within an actor (or a set of actors managed by a router [*Java*, *Scala*]), making sure to configure a thread pool which is either dedicated for this purpose or sufficiently sized.
- Do the blocking call within a `Future`, ensuring an upper bound on the number of such calls at any point in time (submitting an unbounded number of tasks of this nature will exhaust your memory or thread limits).
- Do the blocking call within a `Future`, providing a thread pool with an upper limit on the number of threads which is appropriate for the hardware on which the application runs.
- Dedicate a single thread to manage a set of blocking resources (e.g. a NIO selector driving multiple channels) and dispatch events as they occur as actor messages.

The first possibility is especially well-suited for resources which are single-threaded in nature, like database handles which traditionally can only execute one outstanding query at a time and use internal synchronization to ensure this. A common pattern is to create a router for N actors, each of which wraps a single DB connection and handles queries as sent to the router. The number N must then be tuned for maximum throughput, which will vary depending on which DBMS is deployed on what hardware.

Note: Configuring thread pools is a task best delegated to Akka, simply configure in the `application.conf` and instantiate through an `ActorSystem` [*Java*, *Scala*]

2.2.5 What you should not concern yourself with

An actor system manages the resources it is configured to use in order to run the actors which it contains. There may be millions of actors within one such system, after all the mantra is to view them as abundant and they weigh in at an overhead of only roughly 300 bytes per instance. Naturally, the exact order in which messages are processed in large systems is not controllable by the application author, but this is also not intended. Take a step back and relax while Akka does the heavy lifting under the hood.

2.3 What is an Actor?

The previous section about *Actor Systems* explained how actors form hierarchies and are the smallest unit when building an application. This section looks at one such actor in isolation, explaining the concepts you encounter while implementing it. For a more in depth reference with all the details please refer to *Actors (Scala)* and *Untyped Actors (Java)*.

An actor is a container for *State*, *Behavior*, a *Mailbox*, *Children* and a *Supervisor Strategy*. All of this is encapsulated behind an *Actor Reference*. Finally, this happens *When an Actor Terminates*.

2.3.1 Actor Reference

As detailed below, an actor object needs to be shielded from the outside in order to benefit from the actor model. Therefore, actors are represented to the outside using actor references, which are objects that can be passed around freely and without restriction. This split into inner and outer object enables transparency for all the desired operations: restarting an actor without needing to update references elsewhere, placing the actual actor object on remote hosts, sending messages to actors in completely different applications. But the most important aspect is that it is not possible to look inside an actor and get hold of its state from the outside, unless the actor unwisely publishes this information itself.

2.3.2 State

Actor objects will typically contain some variables which reflect possible states the actor may be in. This can be an explicit state machine (e.g. using the *fsm-scala* module), or it could be a counter, set of listeners, pending requests, etc. These data are what make an actor valuable, and they must be protected from corruption by other actors. The good news is that Akka actors conceptually each have their own light-weight thread, which is completely shielded from the rest of the system. This means that instead of having to synchronize access using locks you can just write your actor code without worrying about concurrency at all.

Behind the scenes Akka will run sets of actors on sets of real threads, where typically many actors share one thread, and subsequent invocations of one actor may end up being processed on different threads. Akka ensures that this implementation detail does not affect the single-threadedness of handling the actor's state.

Because the internal state is vital to an actor's operations, having inconsistent state is fatal. Thus, when the actor fails and is restarted by its supervisor, the state will be created from scratch, like upon first creating the actor. This is to enable the ability of self-healing of the system.

2.3.3 Behavior

Every time a message is processed, it is matched against the current behavior of the actor. Behavior means a function which defines the actions to be taken in reaction to the message at that point in time, say forward a request if the client is authorized, deny it otherwise. This behavior may change over time, e.g. because different clients obtain authorization over time, or because the actor may go into an “out-of-service” mode and later come back. These changes are achieved by either encoding them in state variables which are read from the behavior logic, or the function itself may be swapped out at runtime, see the `become` and `unbecome` operations. However, the initial behavior defined during construction of the actor object is special in the sense that a restart of the actor will reset its behavior to this initial one.

2.3.4 Mailbox

An actor’s purpose is the processing of messages, and these messages were sent to the actor from other actors (or from outside the actor system). The piece which connects sender and receiver is the actor’s mailbox: each actor has exactly one mailbox to which all senders enqueue their messages. Enqueuing happens in the time-order of send operations, which means that messages sent from different actors may not have a defined order at runtime due to the apparent randomness of distributing actors across threads. Sending multiple messages to the same target from the same actor, on the other hand, will enqueue them in the same order.

There are different mailbox implementations to choose from, the default being a FIFO: the order of the messages processed by the actor matches the order in which they were enqueued. This is usually a good default, but applications may need to prioritize some messages over others. In this case, a priority mailbox will enqueue not always at the end but at a position as given by the message priority, which might even be at the front. While using such a queue, the order of messages processed will naturally be defined by the queue’s algorithm and in general not be FIFO.

An important feature in which Akka differs from some other actor model implementations is that the current behavior must always handle the next dequeued message, there is no scanning the mailbox for the next matching one. Failure to handle a message will typically be treated as a failure, unless this behavior is overridden.

2.3.5 Children

Each actor is potentially a supervisor: if it creates children for delegating sub-tasks, it will automatically supervise them. The list of children is maintained within the actor’s context and the actor has access to it. Modifications to the list are done by creating (`context.actorOf(...)`) or stopping (`context.stop(child)`) children and these actions are reflected immediately. The actual creation and termination actions happen behind the scenes in an asynchronous way, so they do not “block” their supervisor.

2.3.6 Supervisor Strategy

The final piece of an actor is its strategy for handling faults of its children. Fault handling is then done transparently by Akka, applying one of the strategies described in *Supervision and Monitoring* for each incoming failure. As this strategy is fundamental to how an actor system is structured, it cannot be changed once an actor has been created.

Considering that there is only one such strategy for each actor, this means that if different strategies apply to the various children of an actor, the children should be grouped beneath intermediate supervisors with matching strategies, preferring once more the structuring of actor systems according to the splitting of tasks into sub-tasks.

2.3.7 When an Actor Terminates

Once an actor terminates, i.e. fails in a way which is not handled by a restart, stops itself or is stopped by its supervisor, it will free up its resources, draining all remaining messages from its mailbox into the system’s “dead letter mailbox” which will forward them to the `EventStream` as `DeadLetters`. The mailbox is then replaced within

the actor reference with a system mailbox, redirecting all new messages to the `EventStream` as `DeadLetters`. This is done on a best effort basis, though, so do not rely on it in order to construct “guaranteed delivery”.

The reason for not just silently dumping the messages was inspired by our tests: we register the `TestEventListener` on the event bus to which the dead letters are forwarded, and that will log a warning for every dead letter received—this has been very helpful for deciphering test failures more quickly. It is conceivable that this feature may also be of use for other purposes.

2.4 Supervision and Monitoring

This chapter outlines the concept behind supervision, the primitives offered and their semantics. For details on how that translates into real code, please refer to the corresponding chapters for Scala and Java APIs.

2.4.1 What Supervision Means

As described in *Actor Systems* supervision describes a dependency relationship between actors: the supervisor delegates tasks to subordinates and therefore must respond to their failures. When a subordinate detects a failure (i.e. throws an exception), it suspends itself and all its subordinates and sends a message to its supervisor, signaling failure. Depending on the nature of the work to be supervised and the nature of the failure, the supervisor has a choice of the following four options:

1. Resume the subordinate, keeping its accumulated internal state
2. Restart the subordinate, clearing out its accumulated internal state
3. Terminate the subordinate permanently
4. Escalate the failure, thereby failing itself


It is important to always view an actor as part of a supervision hierarchy, which explains the existence of the fourth choice (as a supervisor also is subordinate to another supervisor higher up) and has implications on the first three: resuming an actor resumes all its subordinates, restarting an actor entails restarting all its subordinates (but see below for more details), similarly terminating an actor will also terminate all its subordinates. It should be noted that the default behavior of the `preRestart` hook of the `Actor` class is to terminate all its children before restarting, but this hook can be overridden; the recursive restart applies to all children left after this hook has been executed.

Each supervisor is configured with a function translating all possible failure causes (i.e. exceptions) into one of the four choices given above; notably, this function does not take the failed actor’s identity as an input. It is quite easy to come up with examples of structures where this might not seem flexible enough, e.g. wishing for different strategies to be applied to different subordinates. At this point it is vital to understand that supervision is about forming a recursive fault handling structure. If you try to do too much at one level, it will become hard to reason about, hence the recommended way in this case is to add a level of supervision.

Akka implements a specific form called “parental supervision”. Actors can only be created by other actors—where the top-level actor is provided by the library—and each created actor is supervised by its parent. This restriction makes the formation of actor supervision hierarchies implicit and encourages sound design decisions. It should be noted that this also guarantees that actors cannot be orphaned or attached to supervisors from the outside, which might otherwise catch them unawares. In addition, this yields a natural and clean shutdown procedure for (sub-trees of) actor applications.

Warning: Supervision related parent-child communication happens by special system messages that have their own mailboxes separate from user messages. This implies that supervision related events are not deterministically ordered relative to ordinary messages. In general, the user cannot influence the order of normal messages and failure notifications. For details and example see the *Discussion: Message Ordering* section.

2.4.2 The Top-Level Supervisors

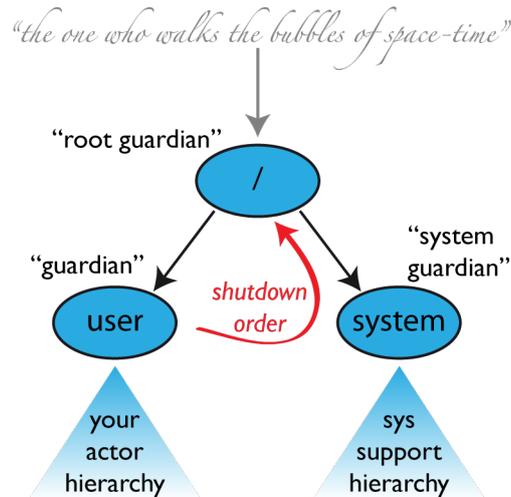

An actor system will during its creation start at least three actors, shown in the image above. For more information about the consequences for actor paths see *Top-Level Scopes for Actor Paths*.

/user: The Guardian Actor

The actor which is probably most interacted with is the parent of all user-created actors, the guardian named `/user`. Actors created using `system.actorOf()` are children of this actor. This means that when this guardian terminates, all normal actors in the system will be shutdown, too. It also means that this guardian's supervisor strategy determines how the top-level normal actors are supervised. Since Akka 2.1 it is possible to configure this using the setting `akka.actor.guardian-supervisor-strategy`, which takes the fully-qualified class-name of a `SupervisorStrategyConfigurator`. When the guardian escalates a failure, the root guardian's response will be to terminate the guardian, which in effect will shut down the whole actor system.

/system: The System Guardian

This special guardian has been introduced in order to achieve an orderly shut-down sequence where logging remains active while all normal actors terminate, even though logging itself is implemented using actors. This is realized by having the system guardian watch the user guardian and initiate its own shut-down upon reception of the `Terminated` message. The top-level system actors are supervised using a strategy which will restart indefinitely upon all types of `Exception` except for `ActorInitializationException` and `ActorKilledException`, which will terminate the child in question. All other throwables are escalated, which will shut down the whole actor system.

/: The Root Guardian

The root guardian is the grand-parent of all so-called "top-level" actors and supervises all the special actors mentioned in *Top-Level Scopes for Actor Paths* using the `SupervisorStrategy.stoppingStrategy`, whose purpose is to terminate the child upon any type of `Exception`. All other throwables will be escalated ... but to whom? Since every real actor has a supervisor, the supervisor of the root guardian cannot be a real actor. And because this means that it is "outside of the bubble", it is called the "bubble-walker". This is a synthetic `ActorRef` which in effect stops its child upon the first sign of trouble and sets the actor system's `isTerminated` status to `true` as soon as the root guardian is fully terminated (all children recursively stopped).

2.4.3 What Restarting Means

When presented with an actor which failed while processing a certain message, causes for the failure fall into three categories:

- Systematic (i.e. programming) error for the specific message received
- (Transient) failure of some external resource used during processing the message
- Corrupt internal state of the actor

Unless the failure is specifically recognizable, the third cause cannot be ruled out, which leads to the conclusion that the internal state needs to be cleared out. If the supervisor decides that its other children or itself is not affected by the corruption—e.g. because of conscious application of the error kernel pattern—it is therefore best to restart the child. This is carried out by creating a new instance of the underlying `Actor` class and replacing the failed instance with the fresh one inside the child's `ActorRef`; the ability to do this is one of the reasons for encapsulating actors within special references. The new actor then resumes processing its mailbox, meaning that the restart is not visible outside of the actor itself with the notable exception that the message during which the failure occurred is not re-processed.

The precise sequence of events during a restart is the following:

1. suspend the actor (which means that it will not process normal messages until resumed), and recursively suspend all children
2. call the old instance's `preRestart` hook (defaults to sending termination requests to all children and calling `postStop`)
3. wait for all children which were requested to terminate (using `context.stop()`) during `preRestart` to actually terminate; this—like all actor operations—is non-blocking, the termination notice from the last killed child will effect the progression to the next step
4. create new actor instance by invoking the originally provided factory again
5. invoke `postRestart` on the new instance (which by default also calls `preStart`)
6. send restart request to all children which were not killed in step 3; restarted children will follow the same process recursively, from step 2
7. resume the actor

2.4.4 What Lifecycle Monitoring Means

Note: Lifecycle Monitoring in Akka is usually referred to as `DeathWatch`

In contrast to the special relationship between parent and child described above, each actor may monitor any other actor. Since actors emerge from creation fully alive and restarts are not visible outside of the affected supervisors, the only state change available for monitoring is the transition from alive to dead. Monitoring is thus used to tie one actor to another so that it may react to the other actor's termination, in contrast to supervision which reacts to failure.

Lifecycle monitoring is implemented using a `Terminated` message to be received by the monitoring actor, where the default behavior is to throw a special `DeathPactException` if not otherwise handled. In order to start listening for `Terminated` messages, invoke `ActorContext.watch(targetActorRef)`. To stop listening, invoke `ActorContext.unwatch(targetActorRef)`. One important property is that the message will be delivered irrespective of the order in which the monitoring request and target's termination occur, i.e. you still get the message even if at the time of registration the target is already dead.

Monitoring is particularly useful if a supervisor cannot simply restart its children and has to terminate them, e.g. in case of errors during actor initialization. In that case it should monitor those children and re-create them or schedule itself to retry this at a later time.

Another common use case is that an actor needs to fail in the absence of an external resource, which may also be one of its own children. If a third party terminates a child by way of the `system.stop(child)` method or sending a `PoisonPill`, the supervisor might well be affected.

2.4.5 One-For-One Strategy vs. All-For-One Strategy

There are two classes of supervision strategies which come with Akka: `OneForOneStrategy` and `AllForOneStrategy`. Both are configured with a mapping from exception type to supervision directive (see [above](#)) and limits on how often a child is allowed to fail before terminating it. The difference between them is that the former applies the obtained directive only to the failed child, whereas the latter applies it to all siblings as well. Normally, you should use the `OneForOneStrategy`, which also is the default if none is specified explicitly.


The `AllForOneStrategy` is applicable in cases where the ensemble of children has such tight dependencies among them, that a failure of one child affects the function of the others, i.e. they are inextricably linked. Since a restart does not clear out the mailbox, it often is best to terminate the children upon failure and re-create them explicitly from the supervisor (by watching the children's lifecycle); otherwise you have to make sure that it is no problem for any of the actors to receive a message which was queued before the restart but processed afterwards.

Normally stopping a child (i.e. not in response to a failure) will not automatically terminate the other children in an all-for-one strategy; this can easily be done by watching their lifecycle: if the `Terminated` message is not handled by the supervisor, it will throw a `DeathPactException` which (depending on its supervisor) will restart it, and the default `preRestart` action will terminate all children. Of course this can be handled explicitly as well.

Please note that creating one-off actors from an all-for-one supervisor entails that failures escalated by the temporary actor will affect all the permanent ones. If this is not desired, install an intermediate supervisor; this can very easily be done by declaring a router of size 1 for the worker, see [routing-scala](#) or [Routing](#).

2.5 Actor References, Paths and Addresses

This chapter describes how actors are identified and located within a possibly distributed actor system. It ties into the central idea that *Actor Systems* form intrinsic supervision hierarchies as well as that communication between actors is transparent with respect to their placement across multiple network nodes.

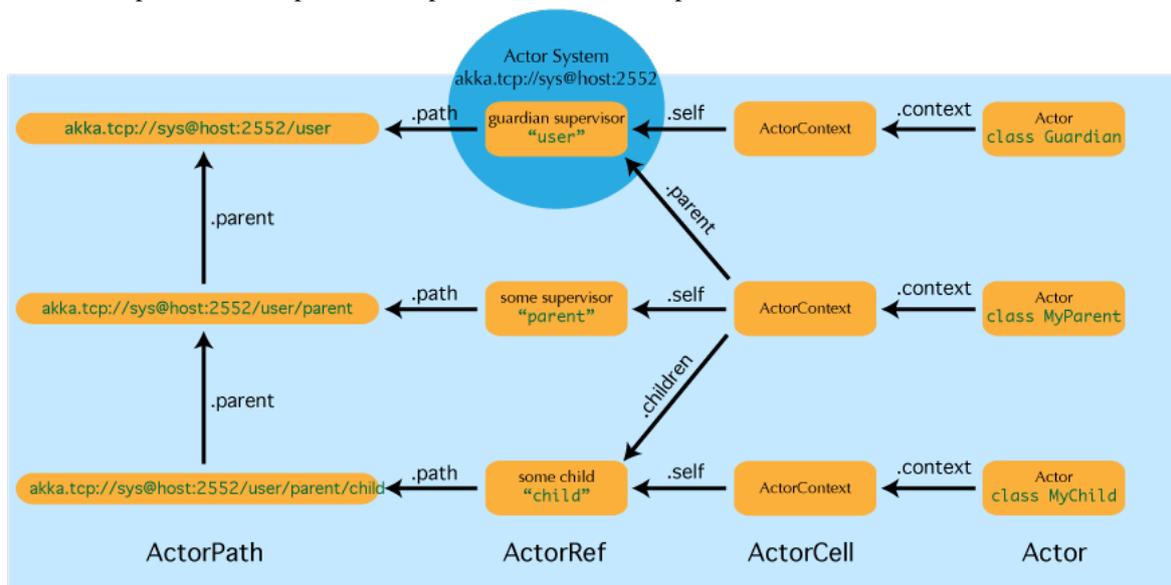

The above image displays the relationship between the most important entities within an actor system, please read on for the details.

2.5.1 What is an Actor Reference?

An actor reference is a subtype of `ActorRef`, whose foremost purpose is to support sending messages to the actor it represents. Each actor has access to its canonical (local) reference through the `self` field; this reference is also included as sender reference by default for all messages sent to other actors. Conversely, during message processing the actor has access to a reference representing the sender of the current message through the `sender` field.

There are several different types of actor references that are supported depending on the configuration of the actor system:

- Purely local actor references are used by actor systems which are not configured to support networking functions. These actor references will not function if sent across a network connection to a remote JVM.
- Local actor references when remoting is enabled are used by actor systems which support networking functions for those references which represent actors within the same JVM. In order to also be reachable when sent to other network nodes, these references include protocol and remote addressing information.
- There is a subtype of local actor references which is used for routers (i.e. actors mixing in the `Router` trait). Its logical structure is the same as for the aforementioned local references, but sending a message to them dispatches to one of their children directly instead.
- Remote actor references represent actors which are reachable using remote communication, i.e. sending messages to them will serialize the messages transparently and send them to the remote JVM.
- There are several special types of actor references which behave like local actor references for all practical purposes:
 - `PromiseActorRef` is the special representation of a `Promise` for the purpose of being completed by the response from an actor. `akka.pattern.ask` creates this actor reference.
 - `DeadLetterActorRef` is the default implementation of the dead letters service to which Akka routes all messages whose destinations are shut down or non-existent.
 - `EmptyLocalActorRef` is what Akka returns when looking up a non-existent local actor path: it is equivalent to a `DeadLetterActorRef`, but it retains its path so that Akka can send it over the network and compare it to other existing actor references for that path, some of which might have been obtained before the actor died.
- And then there are some one-off internal implementations which you should never really see:
 - There is an actor reference which does not represent an actor but acts only as a pseudo-supervisor for the root guardian, we call it “the one who walks the bubbles of space-time”.
 - The first logging service started before actually firing up actor creation facilities is a fake actor reference which accepts log events and prints them directly to standard output; it is `Logging.StandardOutLogger`.
- **(Future Extension)** Cluster actor references represent clustered actor services which may be replicated, migrated or load-balanced across multiple cluster nodes. As such they are virtual names which the cluster service translates into local or remote actor references as appropriate.

2.5.2 What is an Actor Path?

Since actors are created in a strictly hierarchical fashion, there exists a unique sequence of actor names given by recursively following the supervision links between child and parent down towards the root of the actor system. This sequence can be seen as enclosing folders in a file system, hence we adopted the name “path” to refer to it. As in some real file-systems there also are “symbolic links”, i.e. one actor may be reachable using more than one path, where all but one involve some translation which decouples part of the path from the actor’s actual supervision ancestor line; these specialities are described in the sub-sections to follow.

An actor path consists of an anchor, which identifies the actor system, followed by the concatenation of the path elements, from root guardian to the designated actor; the path elements are the names of the traversed actors and are separated by slashes.

What is the Difference Between Actor Reference and Path?

An actor reference designates a single actor and the life-cycle of the reference matches that actor's life-cycle; an actor path represents a name which may or may not be inhabited by an actor and the path itself does not have a life-cycle, it never becomes invalid. You can create an actor path without creating an actor, but you cannot create an actor reference without creating corresponding actor.

Note: That definition does not hold for `actorFor`, which is one of the reasons why `actorFor` is deprecated in favor of `actorSelection`.

You can create an actor, terminate it, and then create a new actor with the same actor path. The newly created actor is a new incarnation of the actor. It is not the same actor. An actor reference to the old incarnation is not valid for the new incarnation. Messages sent to the old actor reference will not be delivered to the new incarnation even though they have the same path.

Actor Path Anchors

Each actor path has an address component, describing the protocol and location by which the corresponding actor is reachable, followed by the names of the actors in the hierarchy from the root up. Examples are:

```
"akka://my-sys/user/service-a/worker1"           // purely local
"akka.tcp://my-sys@host.example.com:5678/user/service-b" // remote
"cluster://my-cluster/service-c"                 // clustered (Future Extension)
```

Here, `akka.tcp` is the default remote transport for the 2.2 release; other transports are pluggable. A remote host using UDP would be accessible by using `akka.udp`. The interpretation of the host and port part (i.e. `serv.example.com:5678` in the example) depends on the transport mechanism used, but it must abide by the URI structural rules.

Logical Actor Paths

The unique path obtained by following the parental supervision links towards the root guardian is called the logical actor path. This path matches exactly the creation ancestry of an actor, so it is completely deterministic as soon as the actor system's remoting configuration (and with it the address component of the path) is set.

Physical Actor Paths

While the logical actor path describes the functional location within one actor system, configuration-based remote deployment means that an actor may be created on a different network host than its parent, i.e. within a different actor system. In this case, following the actor path from the root guardian up entails traversing the network, which is a costly operation. Therefore, each actor also has a physical path, starting at the root guardian of the actor system where the actual actor object resides. Using this path as sender reference when querying other actors will let them reply directly to this actor, minimizing delays incurred by routing.

One important aspect is that a physical actor path never spans multiple actor systems or JVMs. This means that the logical path (supervision hierarchy) and the physical path (actor deployment) of an actor may diverge if one of its ancestors is remotely supervised.

Virtual Actor Paths (Future Extension)

In order to be able to replicate and migrate actors across a cluster of Akka nodes, another level of indirection has to be introduced. The cluster component therefore provides a translation from virtual paths to physical paths which may change in reaction to node failures, cluster rebalancing, etc.

This area is still under active development, expect updates in this section for the Akka release code named Rollins

2.5.3 How are Actor References obtained?

There are two general categories to how actor references may be obtained: by creating actors or by looking them up, where the latter functionality comes in the two flavours of creating actor references from concrete actor paths and querying the logical actor hierarchy.

While local and remote actor references and their paths work in the same way concerning the facilities mentioned below, the exact semantics of clustered actor references and their paths—while certainly as similar as possible—may differ in certain aspects, owing to the virtual nature of those paths. Expect updates for the Akka release code named Rollins.

Creating Actors

An actor system is typically started by creating actors beneath the guardian actor using the `ActorSystem.actorOf` method and then using `ActorContext.actorOf` from within the created actors to spawn the actor tree. These methods return a reference to the newly created actor. Each actor has direct access (through its `ActorContext`) to references for its parent, itself and its children. These references may be sent within messages to other actors, enabling those to reply directly.

Looking up Actors by Concrete Path

In addition, actor references may be looked up using the `ActorSystem.actorSelection` method. The selection can be used for communicating with said actor and the actor corresponding to the selection is looked up when delivering each message.

To acquire an `ActorRef` that is bound to the life-cycle of a specific actor you need to send a message, such as the built-in `Identify` message, to the actor and use the `sender` reference of a reply from the actor.

Note: `actorFor` is deprecated in favor of `actorSelection` because actor references acquired with `actorFor` behave differently for local and remote actors. In the case of a local actor reference, the named actor needs to exist before the lookup, or else the acquired reference will be an `EmptyLocalActorRef`. This will be true even if an actor with that exact path is created after acquiring the actor reference. For remote actor references acquired with `actorFor` the behaviour is different and sending messages to such a reference will under the hood look up the actor by path on the remote system for every message send.

Absolute vs. Relative Paths

In addition to `ActorSystem.actorSelection` there is also `ActorContext.actorSelection`, which is available inside any actor as `context.actorSelection`. This yields an actor selection much like its twin on `ActorSystem`, but instead of looking up the path starting from the root of the actor tree it starts out on the current actor. Path elements consisting of two dots ("`..`") may be used to access the parent actor. You can for example send a message to a specific sibling:

```
context.actorSelection("../brother") ! msg
```

Absolute paths may of course also be looked up on `context` in the usual way, i.e.

```
context.actorSelection("/user/serviceA") ! msg
```

will work as expected.

Querying the Logical Actor Hierarchy

Since the actor system forms a file-system like hierarchy, matching on paths is possible in the same way as supported by Unix shells: you may replace (parts of) path element names with wildcards (`«*»` and `«?»`) to formulate a selection which may match zero or more actual actors. Because the result is not a single actor reference, it has a different type `ActorSelection` and does not support the full set of operations an `ActorRef` does. Selections

may be formulated using the `ActorSystem.actorSelection` and `ActorContext.actorSelection` methods and do support sending messages:

```
context.actorSelection("../*") ! msg
```

will send `msg` to all siblings including the current actor. As for references obtained using `actorFor`, a traversal of the supervision hierarchy is done in order to perform the message send. As the exact set of actors which match a selection may change even while a message is making its way to the recipients, it is not possible to watch a selection for liveness changes. In order to do that, resolve the uncertainty by sending a request and gathering all answers, extracting the sender references, and then watch all discovered concrete actors. This scheme of resolving a selection may be improved upon in a future release.

Summary: `actorOf` vs. `actorSelection` vs. `actorFor`

Note: What the above sections described in some detail can be summarized and memorized easily as follows:

- `actorOf` only ever creates a new actor, and it creates it as a direct child of the context on which this method is invoked (which may be any actor or actor system).
- `actorSelection` only ever looks up existing actors when messages are delivered, i.e. does not create actors, or verify existence of actors when the selection is created.
- `actorFor` (deprecated in favor of `actorSelection`) only ever looks up an existing actor, i.e. does not create one.

2.5.4 Actor Reference and Path Equality

Equality of `ActorRef` match the intention that an `ActorRef` corresponds to the target actor incarnation. Two actor references are compared equal when they have the same path and point to the same actor incarnation. A reference pointing to a terminated actor does not compare equal to a reference pointing to another (re-created) actor with the same path. Note that a restart of an actor caused by a failure still means that it is the same actor incarnation, i.e. a restart is not visible for the consumer of the `ActorRef`.

Remote actor references acquired with `actorFor` do not include the full information about the underlying actor identity and therefore such references do not compare equal to references acquired with `actorOf`, `sender`, or `context.self`. Because of this `actorFor` is deprecated in favor of `actorSelection`.

If you need to keep track of actor references in a collection and do not care about the exact actor incarnation you can use the `ActorPath` as key, because the identifier of the target actor is not taken into account when comparing actor paths.

2.5.5 Reusing Actor Paths


When an actor is terminated, its reference will point to the dead letter mailbox, `DeathWatch` will publish its final transition and in general it is not expected to come back to life again (since the actor life cycle does not allow this). While it is possible to create an actor at a later time with an identical path—simply due to it being impossible to enforce the opposite without keeping the set of all actors ever created available—this is not good practice: remote actor references acquired with `actorFor` which “died” suddenly start to work again, but without any guarantee of ordering between this transition and any other event, hence the new inhabitant of the path may receive messages which were destined for the previous tenant.

It may be the right thing to do in very specific circumstances, but make sure to confine the handling of this precisely to the actor’s supervisor, because that is the only actor which can reliably detect proper deregistration of the name, before which creation of the new child will fail.

It may also be required during testing, when the test subject depends on being instantiated at a specific path. In that case it is best to mock its supervisor so that it will forward the `Terminated` message to the appropriate point in the test procedure, enabling the latter to await proper deregistration of the name.

2.5.6 The Interplay with Remote Deployment

When an actor creates a child, the actor system's deployer will decide whether the new actor resides in the same JVM or on another node. In the second case, creation of the actor will be triggered via a network connection to happen in a different JVM and consequently within a different actor system. The remote system will place the new actor below a special path reserved for this purpose and the supervisor of the new actor will be a remote actor reference (representing that actor which triggered its creation). In this case, `context.parent` (the supervisor reference) and `context.path.parent` (the parent node in the actor's path) do not represent the same actor. However, looking up the child's name within the supervisor will find it on the remote node, preserving logical structure e.g. when sending to an unresolved actor reference.

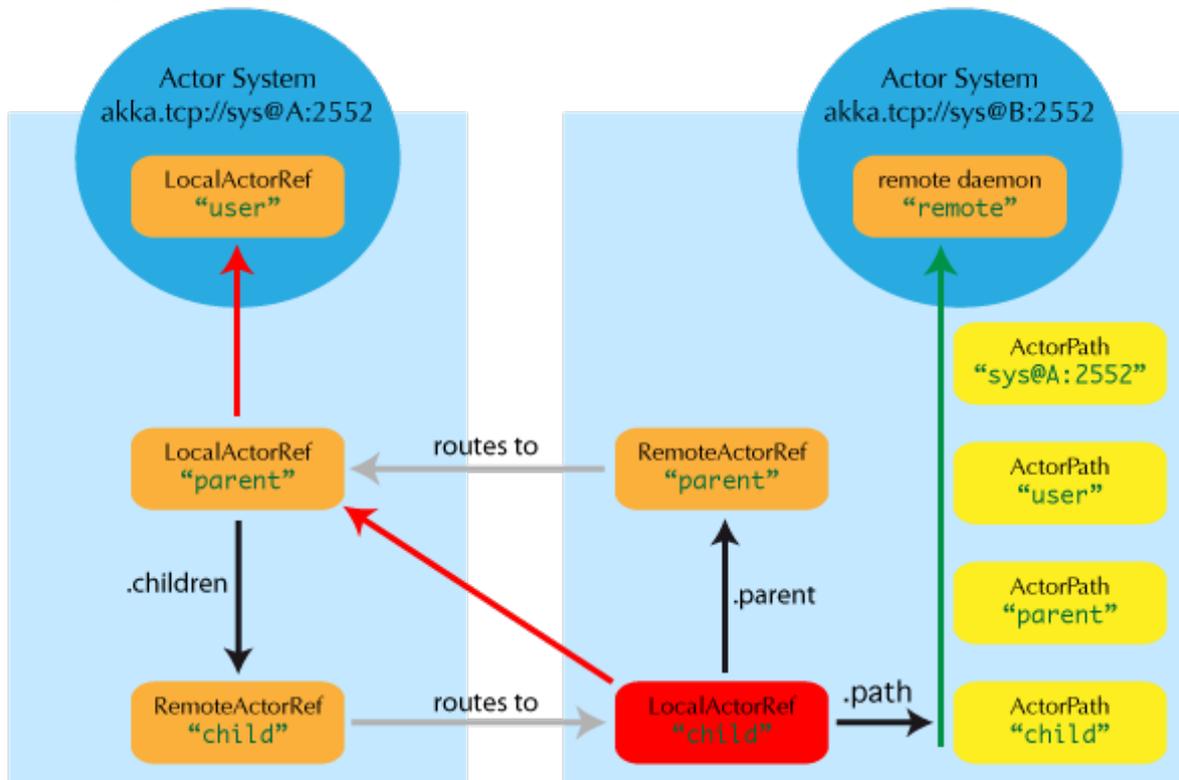

logical actor path: akka.tcp://sys@A:2552/user/parent/child

physical actor path: akka.tcp://sys@B:2552/remote/sys@A:2552/user/parent/child

2.5.7 The Interplay with Clustering (Future Extension)

This section is subject to change!

When creating a scaled-out actor subtree, a cluster name is created for a routed actor reference, where sending to this reference will send to one (or more) of the actual actors created in the cluster. In order for those actors to be able to query other actors while processing their messages, their sender reference must be unique for each of the replicas, which means that physical paths will be used as `self` references for these instances. In the case of replication for achieving fault-tolerance the opposite is required: the `self` reference will be a virtual (cluster) path so that in case of migration or fail-over communication is resumed with the fresh instance.

2.5.8 What is the Address part used for?

When sending an actor reference across the network, it is represented by its path. Hence, the path must fully encode all information necessary to send messages to the underlying actor. This is achieved by encoding protocol, host and port in the address part of the path string. When an actor system receives an actor path from a remote

node, it checks whether that path's address matches the address of this actor system, in which case it will be resolved to the actor's local reference. Otherwise, it will be represented by a remote actor reference.

2.5.9 Top-Level Scopes for Actor Paths

At the root of the path hierarchy resides the root guardian above which all other actors are found; its name is `"/`. The next level consists of the following:

- `"/user"` is the guardian actor for all user-created top-level actors; actors created using `ActorSystem.actorOf` are found below this one.
- `"/system"` is the guardian actor for all system-created top-level actors, e.g. logging listeners or actors automatically deployed by configuration at the start of the actor system.
- `"/deadLetters"` is the dead letter actor, which is where all messages sent to stopped or non-existing actors are re-routed (on a best-effort basis: messages may be lost even within the local JVM).
- `"/temp"` is the guardian for all short-lived system-created actors, e.g. those which are used in the implementation of `ActorRef.ask`.
- `"/remote"` is an artificial path below which all actors reside whose supervisors are remote actor references

The need to structure the name space for actors like this arises from a central and very simple design goal: everything in the hierarchy is an actor, and all actors function in the same way. Hence you can not only look up the actors you created, you can also look up the system guardian and send it a message (which it will dutifully discard in this case). This powerful principle means that there are no quirks to remember, it makes the whole system more uniform and consistent.

If you want to read more about the top-level structure of an actor system, have a look at *The Top-Level Supervisors*.

2.6 Location Transparency

The previous section describes how actor paths are used to enable location transparency. This special feature deserves some extra explanation, because the related term “transparent remoting” was used quite differently in the context of programming languages, platforms and technologies.

2.6.1 Distributed by Default

Everything in Akka is designed to work in a distributed setting: all interactions of actors use purely message passing and everything is asynchronous. This effort has been undertaken to ensure that all functions are available equally when running within a single JVM or on a cluster of hundreds of machines. The key for enabling this is to go from remote to local by way of optimization instead of trying to go from local to remote by way of generalization. See [this classic paper](#) for a detailed discussion on why the second approach is bound to fail.

2.6.2 Ways in which Transparency is Broken

What is true of Akka need not be true of the application which uses it, since designing for distributed execution poses some restrictions on what is possible. The most obvious one is that all messages sent over the wire must be serializable. While being a little less obvious this includes closures which are used as actor factories (i.e. within `Props`) if the actor is to be created on a remote node.

Another consequence is that everything needs to be aware of all interactions being fully asynchronous, which in a computer network might mean that it may take several minutes for a message to reach its recipient (depending on configuration). It also means that the probability for a message to be lost is much higher than within one JVM, where it is close to zero (still: no hard guarantee!).

2.6.3 How is Remoting Used?

We took the idea of transparency to the limit in that there is nearly no API for the remoting layer of Akka: it is purely driven by configuration. Just write your application according to the principles outlined in the previous sections, then specify remote deployment of actor sub-trees in the configuration file. This way, your application can be scaled out without having to touch the code. The only piece of the API which allows programmatic influence on remote deployment is that `Props` contain a field which may be set to a specific `Deploy` instance; this has the same effect as putting an equivalent deployment into the configuration file (if both are given, configuration file wins).

2.6.4 Marking Points for Scaling Up with Routers

In addition to being able to run different parts of an actor system on different nodes of a cluster, it is also possible to scale up onto more cores by multiplying actor sub-trees which support parallelization (think for example a search engine processing different queries in parallel). The clones can then be routed to in different fashions, e.g. round-robin. The only thing necessary to achieve this is that the developer needs to declare a certain actor as “withRouter”, then—in its stead—a router actor will be created which will spawn up a configurable number of children of the desired type and route to them in the configured fashion. Once such a router has been declared, its configuration can be freely overridden from the configuration file, including mixing it with the remote deployment of (some of) the children. Read more about this in *routing-scala* and *Routing*.

2.7 Akka and the Java Memory Model

A major benefit of using the Typesafe Platform, including Scala and Akka, is that it simplifies the process of writing concurrent software. This article discusses how the Typesafe Platform, and Akka in particular, approaches shared memory in concurrent applications.

2.7.1 The Java Memory Model

Prior to Java 5, the Java Memory Model (JMM) was ill defined. It was possible to get all kinds of strange results when shared memory was accessed by multiple threads, such as:

- a thread not seeing values written by other threads: a visibility problem
- a thread observing ‘impossible’ behavior of other threads, caused by instructions not being executed in the order expected: an instruction reordering problem.

With the implementation of JSR 133 in Java 5, a lot of these issues have been resolved. The JMM is a set of rules based on the “happens-before” relation, which constrain when one memory access must happen before another, and conversely, when they are allowed to happen out of order. Two examples of these rules are:

- **The monitor lock rule:** a release of a lock happens before every subsequent acquire of the same lock.
- **The volatile variable rule:** a write of a volatile variable happens before every subsequent read of the same volatile variable

Although the JMM can seem complicated, the specification tries to find a balance between ease of use and the ability to write performant and scalable concurrent data structures.

2.7.2 Actors and the Java Memory Model

With the Actors implementation in Akka, there are two ways multiple threads can execute actions on shared memory:

- if a message is sent to an actor (e.g. by another actor). In most cases messages are immutable, but if that message is not a properly constructed immutable object, without a “happens before” rule, it would be

possible for the receiver to see partially initialized data structures and possibly even values out of thin air (longs/doubles).

- if an actor makes changes to its internal state while processing a message, and accesses that state while processing another message moments later. It is important to realize that with the actor model you don't get any guarantee that the same thread will be executing the same actor for different messages.

To prevent visibility and reordering problems on actors, Akka guarantees the following two “happens before” rules:

- **The actor send rule:** the send of the message to an actor happens before the receive of that message by the same actor.
- **The actor subsequent processing rule:** processing of one message happens before processing of the next message by the same actor.

Note: In layman's terms this means that changes to internal fields of the actor are visible when the next message is processed by that actor. So fields in your actor need not be volatile or equivalent.

Both rules only apply for the same actor instance and are not valid if different actors are used.

2.7.3 Futures and the Java Memory Model

The completion of a Future “happens before” the invocation of any callbacks registered to it are executed.

We recommend not to close over non-final fields (final in Java and val in Scala), and if you *do* choose to close over non-final fields, they must be marked *volatile* in order for the current value of the field to be visible to the callback.

If you close over a reference, you must also ensure that the instance that is referred to is thread safe. We highly recommend staying away from objects that use locking, since it can introduce performance problems and in the worst case, deadlocks. Such are the perils of synchronized.

2.7.4 STM and the Java Memory Model

Akka's Software Transactional Memory (STM) also provides a “happens before” rule:

- **The transactional reference rule:** a successful write during commit, on a transactional reference, happens before every subsequent read of the same transactional reference.

This rule looks a lot like the ‘volatile variable’ rule from the JMM. Currently the Akka STM only supports deferred writes, so the actual writing to shared memory is deferred until the transaction commits. Writes during the transaction are placed in a local buffer (the writeset of the transaction) and are not visible to other transactions. That is why dirty reads are not possible.

How these rules are realized in Akka is an implementation detail and can change over time, and the exact details could even depend on the used configuration. But they will build on the other JMM rules like the monitor lock rule or the volatile variable rule. This means that you, the Akka user, do not need to worry about adding synchronization to provide such a “happens before” relation, because it is the responsibility of Akka. So you have your hands free to deal with your business logic, and the Akka framework makes sure that those rules are guaranteed on your behalf.

2.7.5 Actors and shared mutable state

Since Akka runs on the JVM there are still some rules to be followed.

- Closing over internal Actor state and exposing it to other threads

```

class MyActor extends Actor {
  var state = ...
  def receive = {
    case _ =>
      //Wrongs

      // Very bad, shared mutable state,
      // will break your application in weird ways
      Future { state = NewState }
      anotherActor ? message onSuccess { r => state = r }

      // Very bad, "sender" changes for every message,
      // shared mutable state bug
      Future { expensiveCalculation(sender) }

      //Rights

      // Completely safe, "self" is OK to close over
      // and it's an ActorRef, which is thread-safe
      Future { expensiveCalculation() } onComplete { f => self ! f.value.get }

      // Completely safe, we close over a fixed value
      // and it's an ActorRef, which is thread-safe
      val currentSender = sender
      Future { expensiveCalculation(currentSender) }
  }
}

```

- Messages **should** be immutable, this is to avoid the shared mutable state trap.

2.8 Message Delivery Guarantees

Akka helps you build reliable applications which make use of multiple processor cores in one machine (“scaling up”) or distributed across a computer network (“scaling out”). The key abstraction to make this work is that all interactions between your code units—actors—happen via message passing, which is why the precise semantics of how messages are passed between actors deserve their own chapter.

In order to give some context to the discussion below, consider an application which spans multiple network hosts. The basic mechanism for communication is the same whether sending to an actor on the local JVM or to a remote actor, but of course there will be observable differences in the latency of delivery (possibly also depending on the bandwidth of the network link and the message size) and the reliability. In case of a remote message send there are obviously more steps involved which means that more can go wrong. Another aspect is that local sending will just pass a reference to the message inside the same JVM, without any restrictions on the underlying object which is sent, whereas a remote transport will place a limit on the message size.

Writing your actors such that every interaction could possibly be remote is the safe, pessimistic bet. It means to only rely on those properties which are always guaranteed and which are discussed in detail below. This has of course some overhead in the actor’s implementation. If you are willing to sacrifice full location transparency—for example in case of a group of closely collaborating actors—you can place them always on the same JVM and enjoy stricter guarantees on message delivery. The details of this trade-off are discussed further below.

As a supplementary part we give a few pointers at how to build stronger guarantees on top of the built-in ones. The chapter closes by discussing the role of the “Dead Letter Office”.

2.8.1 The General Rules

These are the rules for message sends (i.e. the `tell` or `!` method, which also underlies the `ask` pattern):

- **at-most-once delivery**, i.e. no guaranteed delivery

- **message ordering per sender–receiver pair**

The first rule is typically found also in other actor implementations while the second is specific to Akka.

Discussion: What does “at-most-once” mean?

When it comes to describing the semantics of a delivery mechanism, there are three basic categories:

- **at-most-once** delivery means that for each message handed to the mechanism, that message is delivered zero or one times; in more casual terms it means that messages may be lost.
- **at-least-once** delivery means that for each message handed to the mechanism potentially multiple attempts are made at delivering it, such that at least one succeeds; again, in more casual terms this means that messages may be duplicated but not lost.
- **exactly-once** delivery means that for each message handed to the mechanism exactly one delivery is made to the recipient; the message can neither be lost nor duplicated.

The first one is the cheapest—highest performance, least implementation overhead—because it can be done in a fire-and-forget fashion without keeping state at the sending end or in the transport mechanism. The second one requires retries to counter transport losses, which means keeping state at the sending end and having an acknowledgement mechanism at the receiving end. The third is most expensive—and has consequently worst performance—because in addition to the second it requires state to be kept at the receiving end in order to filter out duplicate deliveries.

Discussion: Why No Guaranteed Delivery?

At the core of the problem lies the question what exactly this guarantee shall mean:

1. The message is sent out on the network?
2. The message is received by the other host?
3. The message is put into the target actor’s mailbox?
4. The message is starting to be processed by the target actor?
5. The message is processed successfully by the target actor?

Each one of these have different challenges and costs, and it is obvious that there are conditions under which any message passing library would be unable to comply; think for example about configurable mailbox types and how a bounded mailbox would interact with the third point, or even what it would mean to decide upon the “successfully” part of point five.

Along those same lines goes the reasoning in [Nobody Needs Reliable Messaging](#). The only meaningful way for a sender to know whether an interaction was successful is by receiving a business-level acknowledgement message, which is not something Akka could make up on its own (neither are we writing a “do what I mean” framework nor would you want us to).

Akka embraces distributed computing and makes the fallibility of communication explicit through message passing, therefore it does not try to lie and emulate a leaky abstraction. This is a model that has been used with great success in Erlang and requires the users to design their applications around it. You can read more about this approach in the [Erlang documentation](#) (section 10.9 and 10.10), Akka follows it closely.

Another angle on this issue is that by providing only basic guarantees those use cases which do not need stricter guarantees do not pay the cost of their implementation; it is always possible to add stricter guarantees on top of basic ones, but it is not possible to retro-actively remove guarantees in order to gain more performance.

Discussion: Message Ordering

The rule more specifically is that *for a given pair of actors, messages sent from the first to the second will not be received out-of-order*. This is illustrated in the following:

Actor A1 sends messages M1, M2, M3 to A2

Actor A3 sends messages M4, M5, M6 to A2

This means that:

1. If M1 is delivered it must be delivered before M2 and M3
2. If M2 is delivered it must be delivered before M3
3. If M4 is delivered it must be delivered before M5 and M6
4. If M5 is delivered it must be delivered before M6
5. A2 can see messages from A1 interleaved with messages from A3
6. Since there is no guaranteed delivery, any of the messages may be dropped, i.e. not arrive at A2

Note: It is important to note that Akka's guarantee applies to the order in which messages are enqueued into the recipient's mailbox. If the mailbox implementation does not respect FIFO order (e.g. a `PriorityMailbox`), then the order of processing by the actor can deviate from the enqueueing order.

Please note that this rule is **not transitive**:

Actor A sends message M1 to actor C

Actor A then sends message M2 to actor B

Actor B forwards message M2 to actor C

Actor C may receive M1 and M2 in any order

Causal transitive ordering would imply that M2 is never received before M1 at actor C (though any of them might be lost). This ordering can be violated due to different message delivery latencies when A, B and C reside on different network hosts, see more below.

Communication of failure

Please note, that the ordering guarantees discussed above only hold for user messages between actors. Failure of a child of an actor is communicated by special system messages that are not ordered relative to ordinary user messages. In particular:

Child actor C sends message M to its parent P

Child actor fails with failure F

Parent actor P might receive the two events either in order M, F or F, M

The reason for this is that internal system messages has their own mailboxes therefore the ordering of enqueue calls of a user and system message cannot guarantee the ordering of their dequeue times.

2.8.2 The Rules for In-JVM (Local) Message Sends

Be careful what you do with this section!

Relying on the stronger guarantees in this section is not recommended since it will bind your application to local-only deployment: an application may have to be designed differently (as opposed to just employing some message exchange patterns local to some actors) in order to be fit for running on a cluster of machines. Our credo is "design once, deploy any way you wish", and to achieve this you should only rely on [The General Rules](#).

Reliability of Local Message Sends

The Akka test suite relies on not losing messages in the local context (and for non-error condition tests also for remote deployment), meaning that we actually do apply the best effort to keep our tests stable. A local `tell` operation can however fail for the same reasons as a normal method call can on the JVM:

- `StackOverflowError`
- `OutOfMemoryError`
- other `VirtualMachineError`

In addition, local sends can fail in Akka-specific ways:

- if the mailbox does not accept the message (e.g. full `BoundedMailbox`)
- if the receiving actor fails while processing the message or is already terminated

While the first is clearly a matter of configuration the second deserves some thought: the sender of a message does not get feedback if there was an exception while processing, that notification goes to the supervisor instead. This is in general not distinguishable from a lost message for an outside observer.

Ordering of Local Message Sends

Assuming strict FIFO mailboxes the abovementioned caveat of non-transitivity of the message ordering guarantee is eliminated under certain conditions. As you will note, these are quite subtle as it stands, and it is even possible that future performance optimizations will invalidate this whole paragraph. The possibly non-exhaustive list of counter-indications is:

- Before receiving the first reply from a top-level actor, there is a lock which protects an internal interim queue, and this lock is not fair; the implication is that enqueue requests from different senders which arrive during the actor's construction (figuratively, the details are more involved) may be reordered depending on low-level thread scheduling. Since completely fair locks do not exist on the JVM this is unfixable.
- The same mechanism is used during the construction of a `Router`, more precisely the routed `ActorRef`, hence the same problem exists for actors deployed with `Routers`.
- As mentioned above, the problem occurs anywhere a lock is involved during enqueueing, which may also apply to custom mailboxes (or durable mailboxes).

This list has been compiled carefully, but other problematic scenarios may have escaped our analysis.

How does Local Ordering relate to Network Ordering

As explained in the previous paragraph local message sends obey transitive causal ordering under certain conditions. If the remote message transport would respect this ordering as well, that would translate to transitive causal ordering across one network link, i.e. if exactly two network hosts are involved. Involving multiple links, e.g. the three actors on three different nodes mentioned above, then no guarantees can be made.

The current remote transport does **not** support this (again this is caused by non-FIFO wake-up order of a lock, this time serializing connection establishment).

As a speculative view into the future it might be possible to support this ordering guarantee by re-implementing the remote transport layer based completely on actors; at the same time we are looking into providing other low-level transport protocols like UDP or SCTP which would enable higher throughput or lower latency by removing this guarantee again, which would mean that choosing between different implementations would allow trading guarantees versus performance.

2.8.3 Building On Top Of Akka

The philosophy of Akka is to provide a small and consistent tool set which is well suited for building powerful abstractions on top.

Messaging Patterns

As discussed above a straight-forward answer to the requirement of guaranteed delivery is an explicit ACK-RETRY protocol. In its simplest form this requires

- a way to identify individual messages to correlate message with acknowledgement
- a retry mechanism which will resend messages if not acknowledged in time
- a way for the receiver to detect and discard duplicates

The third becomes necessary by virtue of the acknowledgements not being guaranteed to arrive either. An example of implementing all three requirements is shown at *Reliable Proxy Pattern*. Another way of implementing the third part would be to make processing the messages idempotent at the receiving end on the level of the business logic; this is convenient if it arises naturally and otherwise implemented by keeping track of processed message IDs.

Event Sourcing

Event sourcing (and sharding) is what makes large websites scale to billions of users, and the idea is quite simple: when a component (think actor) processes a command it will generate a list of events representing the effect of the command. These events are stored in addition to being applied to the component's state. The nice thing about this scheme is that events only ever are appended to the storage, nothing is ever mutated; this enables perfect replication and scaling of consumers of this event stream (i.e. other components may consume the event stream as a means to replicate the component's state on a different continent or to react to changes). If the component's state is lost—due to a machine failure or by being pushed out of a cache—it can easily be reconstructed by replaying the event stream (usually employing snapshots to speed up the process). Read a lot more about [Event Sourcing](#).

Martin Krasser has written an implementation of event sourcing principles on top of Akka called [eventsourced](#), including support for guaranteed delivery semantics as described in the previous section.

Mailbox with Explicit Acknowledgement

By implementing a custom mailbox type it is possible retry message processing at the receiving actor's end in order to handle temporary failures. This pattern is mostly useful in the local communication context where delivery guarantees are otherwise sufficient to fulfill the application's requirements.

Please note that the caveats for [The Rules for In-JVM \(Local\) Message Sends](#) do apply.

An example implementation of this pattern is shown at *Mailbox with Explicit Acknowledgement*.

2.8.4 Dead Letters

Messages which cannot be delivered (and for which this can be ascertained) will be delivered to a synthetic actor called `/deadLetters`. This delivery happens on a best-effort basis; it may fail even within the local JVM (e.g. during actor termination). Messages sent via unreliable network transports will be lost without turning up as dead letters.

What Should I Use Dead Letters For?

The main use of this facility is for debugging, especially if an actor send does not arrive consistently (where usually inspecting the dead letters will tell you that the sender or recipient was set wrong somewhere along the way). In order to be useful for this purpose it is good practice to avoid sending to `deadLetters` where possible, i.e. run your application with a suitable dead letter logger (see more below) from time to time and clean up the log output. This exercise—like all else—requires judicious application of common sense: it may well be that avoiding to send to a terminated actor complicates the sender's code more than is gained in debug output clarity.

The dead letter service follows the same rules with respect to delivery guarantees as all other message sends, hence it cannot be used to implement guaranteed delivery.

How do I Receive Dead Letters?

An actor can subscribe to class `akka.actor.DeadLetter` on the event stream, see *Event Stream* (Java) or *event-stream-scala* (Scala) for how to do that. The subscribed actor will then receive all dead letters published in the (local) system from that point onwards. Dead letters are not propagated over the network, if you want to collect them in one place you will have to subscribe one actor per network node and forward them manually. Also consider that dead letters are generated at that node which can determine that a send operation is failed, which for a remote send can be the local system (if no network connection can be established) or the remote one (if the actor you are sending to does not exist at that point in time).

Dead Letters Which are (Usually) not Worrisome

Every time an actor does not terminate by its own decision, there is a chance that some messages which it sends to itself are lost. There is one which happens quite easily in complex shutdown scenarios that is usually benign: seeing a `akka.dispatch.Terminate` message dropped means that two termination requests were given, but of course only one can succeed. In the same vein, you might see `akka.actor.Terminated` messages from children while stopping a hierarchy of actors turning up in dead letters if the parent is still watching the child when the parent terminates.

2.9 Configuration

You can start using Akka without defining any configuration, since sensible default values are provided. Later on you might need to amend the settings to change the default behavior or adapt for specific runtime environments. Typical examples of settings that you might amend:

- log level and logger backend
- enable remoting
- message serializers
- definition of routers
- tuning of dispatchers

Akka uses the [Typesafe Config Library](#), which might also be a good choice for the configuration of your own application or library built with or without Akka. This library is implemented in Java with no external dependencies; you should have a look at its documentation (in particular about [ConfigFactory](#)), which is only summarized in the following.

Warning: If you use Akka from the Scala REPL from the 2.9.x series, and you do not provide your own `ClassLoader` to the `ActorSystem`, start the REPL with “-Yrepl-sync” to work around a deficiency in the REPLs provided `Context ClassLoader`.

2.9.1 Where configuration is read from

All configuration for Akka is held within instances of `ActorSystem`, or put differently, as viewed from the outside, `ActorSystem` is the only consumer of configuration information. While constructing an actor system, you can either pass in a `Config` object or not, where the second case is equivalent to passing `ConfigFactory.load()` (with the right class loader). This means roughly that the default is to parse all `application.conf`, `application.json` and `application.properties` found at the root of the class path—please refer to the aforementioned documentation for details. The actor system then merges in all `reference.conf` resources found at the root of the class path to form the fallback configuration, i.e. it internally uses

```
appConfig.withFallback(ConfigFactory.defaultReference(classLoader))
```

The philosophy is that code never contains default values, but instead relies upon their presence in the `reference.conf` supplied with the library in question.

Highest precedence is given to overrides given as system properties, see [the HOCON specification](#) (near the bottom). Also noteworthy is that the application configuration—which defaults to `application`—may be overridden using the `config.resource` property (there are more, please refer to the [Config docs](#)).

Note: If you are writing an Akka application, keep your configuration in `application.conf` at the root of the class path. If you are writing an Akka-based library, keep its configuration in `reference.conf` at the root of the JAR file.

2.9.2 When using JarJar, OneJar, Assembly or any jar-bundler

Warning: Akka's configuration approach relies heavily on the notion of every module/jar having its own `reference.conf` file, all of these will be discovered by the configuration and loaded. Unfortunately this also means that if you put/merge multiple jars into the same jar, you need to merge all the `reference.conf`s as well. Otherwise all defaults will be lost and Akka will not function.

2.9.3 Custom `application.conf`

A custom `application.conf` might look like this:

```
# In this file you can override any option defined in the reference files.
# Copy in parts of the reference files and modify as you please.

akka {

  # Loggers to register at boot time (akka.event.Logging$DefaultLogger logs
  # to STDOUT)
  loggers = ["akka.event.slf4j.Slf4jLogger"]

  # Log level used by the configured loggers (see "loggers") as soon
  # as they have been started; before that, see "stdout-loglevel"
  # Options: OFF, ERROR, WARNING, INFO, DEBUG
  loglevel = "DEBUG"

  # Log level for the very basic logger activated during AkkaApplication startup
  # Options: OFF, ERROR, WARNING, INFO, DEBUG
  stdout-loglevel = "DEBUG"

  actor {
    default-dispatcher {
      # Throughput for default Dispatcher, set to 1 for as fair as possible
      throughput = 10
    }
  }

  remote {
    server {
      # The port clients should connect to. Default is 2552 (AKKA)
      port = 2562
    }
  }
}
```

2.9.4 Including files

Sometimes it can be useful to include another configuration file, for example if you have one `application.conf` with all environment independent settings and then override some settings for specific environments.

Specifying system property with `-Dconfig.resource=/dev.conf` will load the `dev.conf` file, which includes the `application.conf`

`dev.conf`:

```
include "application"

akka {
  loglevel = "DEBUG"
}
```

More advanced include and substitution mechanisms are explained in the [HOCON](#) specification.

2.9.5 Logging of Configuration

If the system or config property `akka.log-config-on-start` is set to `on`, then the complete configuration at INFO level when the actor system is started. This is useful when you are uncertain of what configuration is used.

If in doubt, you can also easily and nicely inspect configuration objects before or after using them to construct an actor system:

```
Welcome to Scala version 2.10.2 (Java HotSpot(TM) 64-Bit Server VM, Java 1.6.0_27).
Type in expressions to have them evaluated.
Type :help for more information.

scala> import com.typesafe.config._
import com.typesafe.config._

scala> ConfigFactory.parseString("a.b=12")
res0: com.typesafe.config.Config = Config(SimpleConfigObject({"a" : {"b" : 12}}))

scala> res0.root.render
res1: java.lang.String =
{
  # String: 1
  "a" : {
    # String: 1
    "b" : 12
  }
}
```

The comments preceding every item give detailed information about the origin of the setting (file & line number) plus possible comments which were present, e.g. in the reference configuration. The settings as merged with the reference and parsed by the actor system can be displayed like this:

```
final ActorSystem system = ActorSystem.create();
System.out.println(system.settings());
// this is a shortcut for system.settings().config().root().render()
```

2.9.6 A Word About ClassLoaders

In several places of the configuration file it is possible to specify the fully-qualified class name of something to be instantiated by Akka. This is done using Java reflection, which in turn uses a `ClassLoader`. Getting the right one in challenging environments like application containers or OSGi bundles is not always trivial, the current

approach of Akka is that each `ActorSystem` implementation stores the current thread's context class loader (if available, otherwise just its own loader as in `this.getClass().getClassLoader()`) and uses that for all reflective accesses. This implies that putting Akka on the boot class path will yield `NullPointerException` from strange places: this is simply not supported.

2.9.7 Application specific settings

The configuration can also be used for application specific settings. A good practice is to place those settings in an `Extension`, as described in:

- Scala API: *extending-akka-scala.settings*
- Java API: *Application specific settings*

2.9.8 Configuring multiple ActorSystem

If you have more than one `ActorSystem` (or you're writing a library and have an `ActorSystem` that may be separate from the application's) you may want to separate the configuration for each system.

Given that `ConfigFactory.load()` merges all resources with matching name from the whole class path, it is easiest to utilize that functionality and differentiate actor systems within the hierarchy of the configuration:

```
myapp1 {
  akka.loglevel = "WARNING"
  my.own.setting = 43
}
myapp2 {
  akka.loglevel = "ERROR"
  app2.setting = "appname"
}
my.own.setting = 42
my.other.setting = "hello"
```

```
val config = ConfigFactory.load()
val app1 = ActorSystem("MyApp1", config.getConfig("myapp1").withFallback(config))
val app2 = ActorSystem("MyApp2",
  config.getConfig("myapp2").withOnlyPath("akka").withFallback(config))
```

These two samples demonstrate different variations of the “lift-a-subtree” trick: in the first case, the configuration accessible from within the actor system is this

```
akka.loglevel = "WARNING"
my.own.setting = 43
my.other.setting = "hello"
// plus myapp1 and myapp2 subtrees
```

while in the second one, only the “akka” subtree is lifted, with the following result

```
akka.loglevel = "ERROR"
my.own.setting = 42
my.other.setting = "hello"
// plus myapp1 and myapp2 subtrees
```

Note: The configuration library is really powerful, explaining all features exceeds the scope affordable here. In particular not covered are how to include other configuration files within other files (see a small example at [Including files](#)) and copying parts of the configuration tree by way of path substitutions.

You may also specify and parse the configuration programmatically in other ways when instantiating the `ActorSystem`.

```
import akka.actor.ActorSystem
import com.typesafe.config.ConfigFactory
val customConf = ConfigFactory.parseString("""
  akka.actor.deployment {
    /my-service {
      router = round-robin
      nr-of-instances = 3
    }
  }
  """)
// ConfigFactory.load sandwiches customConf between default reference
// config and default overrides, and then resolves it.
val system = ActorSystem("MySystem", ConfigFactory.load(customConf))
```

2.9.9 Reading configuration from a custom location

You can replace or supplement `application.conf` either in code or using system properties.

If you're using `ConfigFactory.load()` (which Akka does by default) you can replace `application.conf` by defining `-Dconfig.resource=whatever`, `-Dconfig.file=whatever`, or `-Dconfig.url=whatever`.

From inside your replacement file specified with `-Dconfig.resource` and friends, you can include "application" if you still want to use `application.{conf,json,properties}` as well. Settings specified before include "application" would be overridden by the included file, while those after would override the included file.

In code, there are many customization options.

There are several overloads of `ConfigFactory.load()`; these allow you to specify something to be sandwiched between system properties (which override) and the defaults (from `reference.conf`), replacing the usual `application.{conf,json,properties}` and replacing `-Dconfig.file` and friends.

The simplest variant of `ConfigFactory.load()` takes a resource basename (instead of application); `myname.conf`, `myname.json`, and `myname.properties` would then be used instead of `application.{conf,json,properties}`.

The most flexible variant takes a `Config` object, which you can load using any method in `ConfigFactory`. For example you could put a config string in code using `ConfigFactory.parseString()` or you could make a map and `ConfigFactory.parseMap()`, or you could load a file.

You can also combine your custom config with the usual config, that might look like:

```
// make a Config with just your special setting
Config myConfig =
  ConfigFactory.parseString("something=somethingElse");
// load the normal config stack (system props,
// then application.conf, then reference.conf)
Config regularConfig =
  ConfigFactory.load();
// override regular stack with myConfig
Config combined =
  myConfig.withFallback(regularConfig);
// put the result in between the overrides
// (system props) and defaults again
Config complete =
  ConfigFactory.load(combined);
// create ActorSystem
ActorSystem system =
  ActorSystem.create("myname", complete);
```

When working with `Config` objects, keep in mind that there are three "layers" in the cake:

- `ConfigFactory.defaultOverrides()` (system properties)

- the app's settings
- `ConfigFactory.defaultReference()` (`reference.conf`)

The normal goal is to customize the middle layer while leaving the other two alone.

- `ConfigFactory.load()` loads the whole stack
- the overloads of `ConfigFactory.load()` let you specify a different middle layer
- the `ConfigFactory.parse()` variations load single files or resources

To stack two layers, use `override.withFallback(fallback)`; try to keep system props (`defaultOverrides()`) on top and `reference.conf` (`defaultReference()`) on the bottom.

Do keep in mind, you can often just add another `include` statement in `application.conf` rather than writing code. Includes at the top of `application.conf` will be overridden by the rest of `application.conf`, while those at the bottom will override the earlier stuff.

2.9.10 Listing of the Reference Configuration

Each Akka module has a reference configuration file with the default values.

akka-actor

```
#####
# Akka Actor Reference Config File #
#####

# This is the reference config file that contains all the default settings.
# Make your edits/overrides in your application.conf.

akka {
  # Akka version, checked against the runtime version of Akka.
  version = "2.2.5"

  # Home directory of Akka, modules in the deploy directory will be loaded
  home = ""

  # Loggers to register at boot time (akka.event.Logging$DefaultLogger logs
  # to STDOUT)
  loggers = ["akka.event.Logging$DefaultLogger"]

  # Deprecated, use akka.loggers.
  event-handlers = []

  # Loggers are created and registered synchronously during ActorSystem
  # start-up, and since they are actors, this timeout is used to bound the
  # waiting time
  logger-startup-timeout = 5s

  # Deprecated, use akka.logger-startup-timeout
  event-handler-startup-timeout = -1s

  # Log level used by the configured loggers (see "loggers") as soon
  # as they have been started; before that, see "stdout-loglevel"
  # Options: OFF, ERROR, WARNING, INFO, DEBUG
  loglevel = "INFO"

  # Log level for the very basic logger activated during AkkaApplication startup
  # Options: OFF, ERROR, WARNING, INFO, DEBUG
  stdout-loglevel = "WARNING"
```

```

# Log the complete configuration at INFO level when the actor system is started.
# This is useful when you are uncertain of what configuration is used.
log-config-on-start = off

# Log at info level when messages are sent to dead letters.
# Possible values:
# on: all dead letters are logged
# off: no logging of dead letters
# n: positive integer, number of dead letters that will be logged
log-dead-letters = 10

# Possibility to turn off logging of dead letters while the actor system
# is shutting down. Logging is only done when enabled by 'log-dead-letters'
# setting.
log-dead-letters-during-shutdown = on

# List FQCN of extensions which shall be loaded at actor system startup.
# Should be on the format: 'extensions = ["foo", "bar"]' etc.
# See the Akka Documentation for more info about Extensions
extensions = []

# Toggles whether threads created by this ActorSystem should be daemons or not
daemonic = off

# JVM shutdown, System.exit(-1), in case of a fatal error,
# such as OutOfMemoryError
jvm-exit-on-fatal-error = on

actor {

  # FQCN of the ActorRefProvider to be used; the below is the built-in default,
  # another one is akka.remote.RemoteActorRefProvider in the akka-remote bundle.
  provider = "akka.actor.LocalActorRefProvider"

  # The guardian "/user" will use this class to obtain its supervisorStrategy.
  # It needs to be a subclass of akka.actor.SupervisorStrategyConfigurator.
  # In addition to the default there is akka.actor.StoppingSupervisorStrategy.
  guardian-supervisor-strategy = "akka.actor.DefaultSupervisorStrategy"

  # Timeout for ActorSystem.actorOf
  creation-timeout = 20s

  # Frequency with which stopping actors are prodded in case they had to be
  # removed from their parents
  reaper-interval = 5s

  # Serializes and deserializes (non-primitive) messages to ensure immutability,
  # this is only intended for testing.
  serialize-messages = off

  # Serializes and deserializes creators (in Props) to ensure that they can be
  # sent over the network, this is only intended for testing. Purely local deployments
  # as marked with deploy.scope == LocalScope are exempt from verification.
  serialize-creators = off

  # Timeout for send operations to top-level actors which are in the process
  # of being started. This is only relevant if using a bounded mailbox or the
  # CallingThreadDispatcher for a top-level actor.
  unstarted-push-timeout = 10s

  typed {
    # Default timeout for typed actor methods with non-void return type
    timeout = 5s
  }
}

```

```

}

deployment {

  # deployment id pattern - on the format: /parent/child etc.
  default {

    # The id of the dispatcher to use for this actor.
    # If undefined or empty the dispatcher specified in code
    # (Props.withDispatcher) is used, or default-dispatcher if not
    # specified at all.
    dispatcher = ""

    # The id of the mailbox to use for this actor.
    # If undefined or empty the default mailbox of the configured dispatcher
    # is used or if there is no mailbox configuration the mailbox specified
    # in code (Props.withMailbox) is used.
    # If there is a mailbox defined in the configured dispatcher then that
    # overrides this setting.
    mailbox = ""

    # routing (load-balance) scheme to use
    # - available: "from-code", "round-robin", "random", "smallest-mailbox",
    #               "scatter-gather", "broadcast"
    # - or:        Fully qualified class name of the router class.
    #               The class must extend akka.routing.CustomRouterConfig and
    #               have a public constructor with com.typesafe.config.Config
    #               parameter.
    # - default is "from-code";
    # Whether or not an actor is transformed to a Router is decided in code
    # only (Props.withRouter). The type of router can be overridden in the
    # configuration; specifying "from-code" means that the values specified
    # in the code shall be used.
    # In case of routing, the actors to be routed to can be specified
    # in several ways:
    # - nr-of-instances: will create that many children
    # - routees.paths: will look the paths up using actorFor and route to
    #   them, i.e. will not create children
    # - resizer: dynamically resizable number of routees as specified in
    #   resizer below
    router = "from-code"

    # number of children to create in case of a router;
    # this setting is ignored if routees.paths is given
    nr-of-instances = 1

    # within is the timeout used for routers containing future calls
    within = 5 seconds

    # number of virtual nodes per node for consistent-hashing router
    virtual-nodes-factor = 10

    routees {
      # Alternatively to giving nr-of-instances you can specify the full
      # paths of those actors which should be routed to. This setting takes
      # precedence over nr-of-instances
      paths = []
    }

    # Routers with dynamically resizable number of routees; this feature is
    # enabled by including (parts of) this section in the deployment
    resizer {

```

```

# The fewest number of routees the router should ever have.
lower-bound = 1

# The most number of routees the router should ever have.
# Must be greater than or equal to lower-bound.
upper-bound = 10

# Threshold used to evaluate if a routee is considered to be busy
# (under pressure). Implementation depends on this value (default is 1).
# 0: number of routees currently processing a message.
# 1: number of routees currently processing a message has
# some messages in mailbox.
# > 1: number of routees with at least the configured pressure-threshold
# messages in their mailbox. Note that estimating mailbox size of
# default UnboundedMailbox is O(N) operation.
pressure-threshold = 1

# Percentage to increase capacity whenever all routees are busy.
# For example, 0.2 would increase 20% (rounded up), i.e. if current
# capacity is 6 it will request an increase of 2 more routees.
rampup-rate = 0.2

# Minimum fraction of busy routees before backing off.
# For example, if this is 0.3, then we'll remove some routees only when
# less than 30% of routees are busy, i.e. if current capacity is 10 and
# 3 are busy then the capacity is unchanged, but if 2 or less are busy
# the capacity is decreased.
# Use 0.0 or negative to avoid removal of routees.
backoff-threshold = 0.3

# Fraction of routees to be removed when the resizer reaches the
# backoffThreshold.
# For example, 0.1 would decrease 10% (rounded up), i.e. if current
# capacity is 9 it will request an decrease of 1 routee.
backoff-rate = 0.1

# When the resizer reduce the capacity the abandoned routee actors are
# stopped with PoisonPill after this delay. The reason for the delay is
# to give concurrent messages a chance to be placed in mailbox before
# sending PoisonPill.
# Use 0s to skip delay.
stop-delay = 1s

# Number of messages between resize operation.
# Use 1 to resize before each message.
messages-per-resize = 10
}
}
}

default-dispatcher {
# Must be one of the following
# Dispatcher, (BalancingDispatcher, only valid when all actors using it are
# of the same type), PinnedDispatcher, or a FQCN to a class inheriting
# MessageDispatcherConfigurator with a public constructor with
# both com.typesafe.config.Config parameter and
# akka.dispatch.DispatcherPrerequisites parameters.
# PinnedDispatcher must be used together with executor=thread-pool-executor.
type = "Dispatcher"

# Which kind of ExecutorService to use for this dispatcher
# Valid options:
# - "fork-join-executor" requires a "fork-join-executor" section

```

```

# - "thread-pool-executor" requires a "thread-pool-executor" section
# - A FQCN of a class extending ExecutorServiceConfigurator
executor = "fork-join-executor"

# This will be used if you have set "executor = "fork-join-executor""
fork-join-executor {
  # Min number of threads to cap factor-based parallelism number to
  parallelism-min = 8

  # The parallelism factor is used to determine thread pool size using the
  # following formula: ceil(available processors * factor). Resulting size
  # is then bounded by the parallelism-min and parallelism-max values.
  parallelism-factor = 3.0

  # Max number of threads to cap factor-based parallelism number to
  parallelism-max = 64
}

# This will be used if you have set "executor = "thread-pool-executor""
thread-pool-executor {
  # Keep alive time for threads
  keep-alive-time = 60s

  # Min number of threads to cap factor-based core number to
  core-pool-size-min = 8

  # The core pool size factor is used to determine thread pool core size
  # using the following formula: ceil(available processors * factor).
  # Resulting size is then bounded by the core-pool-size-min and
  # core-pool-size-max values.
  core-pool-size-factor = 3.0

  # Max number of threads to cap factor-based number to
  core-pool-size-max = 64

  # Minimum number of threads to cap factor-based max number to
  # (if using a bounded task queue)
  max-pool-size-min = 8

  # Max no of threads (if using a bounded task queue) is determined by
  # calculating: ceil(available processors * factor)
  max-pool-size-factor = 3.0

  # Max number of threads to cap factor-based max number to
  # (if using a bounded task queue)
  max-pool-size-max = 64

  # Specifies the bounded capacity of the task queue (< 1 == unbounded)
  task-queue-size = -1

  # Specifies which type of task queue will be used, can be "array" or
  # "linked" (default)
  task-queue-type = "linked"

  # Allow core threads to time out
  allow-core-timeout = on
}

# How long time the dispatcher will wait for new actors until it shuts down
shutdown-timeout = 1s

# Throughput defines the number of messages that are processed in a batch
# before the thread is returned to the pool. Set to 1 for as fair as possible.

```

```

throughput = 5

# Throughput deadline for Dispatcher, set to 0 or negative for no deadline
throughput-deadline-time = 0ms

# For BalancingDispatcher: If the balancing dispatcher should attempt to
# schedule idle actors using the same dispatcher when a message comes in,
# and the dispatchers ExecutorService is not fully busy already.
attempt-teamwork = on

# If this dispatcher requires a specific type of mailbox, specify the
# fully-qualified class name here; the actually created mailbox will
# be a subtype of this type. The empty string signifies no requirement.
mailbox-requirement = ""
}

default-mailbox {
# FQCN of the MailboxType. The Class of the FQCN must have a public
# constructor with
# (akka.actor.ActorSystem.Settings, com.typesafe.config.Config) parameters.
mailbox-type = "akka.dispatch.UnboundedMailbox"

# If the mailbox is bounded then it uses this setting to determine its
# capacity. The provided value must be positive.
# NOTICE:
# Up to version 2.1 the mailbox type was determined based on this setting;
# this is no longer the case, the type must explicitly be a bounded mailbox.
mailbox-capacity = 1000

# If the mailbox is bounded then this is the timeout for enqueueing
# in case the mailbox is full. Negative values signify infinite
# timeout, which should be avoided as it bears the risk of dead-lock.
mailbox-push-timeout-time = 10s

# For Actor with Stash: The default capacity of the stash.
# If negative (or zero) then an unbounded stash is used (default)
# If positive then a bounded stash is used and the capacity is set using
# the property
stash-capacity = -1
}

mailbox {
# Mapping between message queue semantics and mailbox configurations.
# Used by akka.dispatch.RequiresMessageQueue[T] to enforce different
# mailbox types on actors.
# If your Actor implements RequiresMessageQueue[T], then when you create
# an instance of that actor its mailbox type will be decided by looking
# up a mailbox configuration via T in this mapping
requirements {
  "akka.dispatch.UnboundedMessageQueueSemantics" =
    akka.actor.mailbox.unbounded-queue-based
  "akka.dispatch.BoundedMessageQueueSemantics" =
    akka.actor.mailbox.bounded-queue-based
  "akka.dispatch.DequeBasedMessageQueueSemantics" =
    akka.actor.mailbox.unbounded-deque-based
  "akka.dispatch.UnboundedDequeBasedMessageQueueSemantics" =
    akka.actor.mailbox.unbounded-deque-based
  "akka.dispatch.BoundedDequeBasedMessageQueueSemantics" =
    akka.actor.mailbox.bounded-deque-based
  "akka.dispatch.MultipleConsumerSemantics" =
    akka.actor.mailbox.unbounded-queue-based
}
}

```

```

unbounded-queue-based {
  # FQCN of the MailboxType, The Class of the FQCN must have a public
  # constructor with (akka.actor.ActorSystem.Settings,
  # com.typesafe.config.Config) parameters.
  mailbox-type = "akka.dispatch.UnboundedMailbox"
}

bounded-queue-based {
  # FQCN of the MailboxType, The Class of the FQCN must have a public
  # constructor with (akka.actor.ActorSystem.Settings,
  # com.typesafe.config.Config) parameters.
  mailbox-type = "akka.dispatch.BoundedMailbox"
}

unbounded-deque-based {
  # FQCN of the MailboxType, The Class of the FQCN must have a public
  # constructor with (akka.actor.ActorSystem.Settings,
  # com.typesafe.config.Config) parameters.
  mailbox-type = "akka.dispatch.UnboundedDequeBasedMailbox"
}

bounded-deque-based {
  # FQCN of the MailboxType, The Class of the FQCN must have a public
  # constructor with (akka.actor.ActorSystem.Settings,
  # com.typesafe.config.Config) parameters.
  mailbox-type = "akka.dispatch.BoundedDequeBasedMailbox"
}
}

debug {
  # enable function of Actor.loggable(), which is to log any received message
  # at DEBUG level, see the "Testing Actor Systems" section of the Akka
  # Documentation at http://akka.io/docs
  receive = off

  # enable DEBUG logging of all AutoReceiveMessages (Kill, PoisonPill et.c.)
  autoreceive = off

  # enable DEBUG logging of actor lifecycle changes
  lifecycle = off

  # enable DEBUG logging of all LoggingFSMs for events, transitions and timers
  fsm = off

  # enable DEBUG logging of subscription changes on the eventStream
  event-stream = off

  # enable DEBUG logging of unhandled messages
  unhandled = off

  # enable WARN logging of misconfigured routers
  router-misconfiguration = off
}

# Entries for pluggable serializers and their bindings.
serializers {
  java = "akka.serialization.JavaSerializer"
  bytes = "akka.serialization.ByteArraySerializer"
}

# Class to Serializer binding. You only need to specify the name of an
# interface or abstract base class of the messages. In case of ambiguity it
# is using the most specific configured class, or giving a warning and

```

```

# choosing the "first" one.
#
# To disable one of the default serializers, assign its class to "none", like
# "java.io.Serializable" = none
serialization-bindings {
  "[B" = bytes
  "java.io.Serializable" = java
}

# Configuration items which are used by the akka.actor.ActorDSL._ methods
dsl {
  # Maximum queue size of the actor created by newInbox(); this protects
  # against faulty programs which use select() and consistently miss messages
  inbox-size = 1000

  # Default timeout to assume for operations like Inbox.receive et al
  default-timeout = 5s
}

}

# Used to set the behavior of the scheduler.
# Changing the default values may change the system behavior drastically so make
# sure you know what you're doing! See the Scheduler section of the Akka
# Documentation for more details.
scheduler {
  # The LightArrayRevolverScheduler is used as the default scheduler in the
  # system. It does not execute the scheduled tasks on exact time, but on every
  # tick, it will run everything that is (over)due. You can increase or decrease
  # the accuracy of the execution timing by specifying smaller or larger tick
  # duration. If you are scheduling a lot of tasks you should consider increasing
  # the ticks per wheel.
  # Note that it might take up to 1 tick to stop the Timer, so setting the
  # tick-duration to a high value will make shutting down the actor system
  # take longer.
  tick-duration = 10ms

  # The timer uses a circular wheel of buckets to store the timer tasks.
  # This should be set such that the majority of scheduled timeouts (for high
  # scheduling frequency) will be shorter than one rotation of the wheel
  # (ticks-per-wheel * ticks-duration)
  # THIS MUST BE A POWER OF TWO!
  ticks-per-wheel = 512

  # This setting selects the timer implementation which shall be loaded at
  # system start-up. Built-in choices are:
  # - akka.actor.LightArrayRevolverScheduler
  # - akka.actor.DefaultScheduler (HWT) DEPRECATED
  # The class given here must implement the akka.actor.Scheduler interface
  # and offer a public constructor which takes three arguments:
  # 1) com.typesafe.config.Config
  # 2) akka.event.LoggingAdapter
  # 3) java.util.concurrent.ThreadFactory
  implementation = akka.actor.LightArrayRevolverScheduler

  # When shutting down the scheduler, there will typically be a thread which
  # needs to be stopped, and this timeout determines how long to wait for
  # that to happen. In case of timeout the shutdown of the actor system will
  # proceed without running possibly still enqueued tasks.
  shutdown-timeout = 5s
}

io {

```

```

# By default the select loops run on dedicated threads, hence using a
# PinnedDispatcher
pinned-dispatcher {
  type = "PinnedDispatcher"
  executor = "thread-pool-executor"
  thread-pool-executor.allow-core-pool-timeout = off
}

tcp {

  # The number of selectors to stripe the served channels over; each of
  # these will use one select loop on the selector-dispatcher.
  nr-of-selectors = 1

  # Maximum number of open channels supported by this TCP module; there is
  # no intrinsic general limit, this setting is meant to enable DoS
  # protection by limiting the number of concurrently connected clients.
  # Also note that this is a "soft" limit; in certain cases the implementation
  # will accept a few connections more or a few less than the number configured
  # here. Must be an integer > 0 or "unlimited".
  max-channels = 256000

  # When trying to assign a new connection to a selector and the chosen
  # selector is at full capacity, retry selector choosing and assignment
  # this many times before giving up
  selector-association-retries = 10

  # The maximum number of connection that are accepted in one go,
  # higher numbers decrease latency, lower numbers increase fairness on
  # the worker-dispatcher
  batch-accept-limit = 10

  # The number of bytes per direct buffer in the pool used to read or write
  # network data from the kernel.
  direct-buffer-size = 128 KiB

  # The maximal number of direct buffers kept in the direct buffer pool for
  # reuse.
  direct-buffer-pool-limit = 1000

  # The duration a connection actor waits for a `Register` message from
  # its commander before aborting the connection.
  register-timeout = 5s

  # The maximum number of bytes delivered by a `Received` message. Before
  # more data is read from the network the connection actor will try to
  # do other work.
  max-received-message-size = unlimited

  # Enable fine grained logging of what goes on inside the implementation.
  # Be aware that this may log more than once per message sent to the actors
  # of the tcp implementation.
  trace-logging = off

  # Fully qualified config path which holds the dispatcher configuration
  # to be used for running the select() calls in the selectors
  selector-dispatcher = "akka.io.pinned-dispatcher"

  # Fully qualified config path which holds the dispatcher configuration
  # for the read/write worker actors
  worker-dispatcher = "akka.actor.default-dispatcher"

  # Fully qualified config path which holds the dispatcher configuration

```

```

# for the selector management actors
management-dispatcher = "akka.actor.default-dispatcher"

# Fully qualified config path which holds the dispatcher configuration
# on which file IO tasks are scheduled
file-io-dispatcher = "akka.actor.default-dispatcher"

# The maximum number of bytes (or "unlimited") to transfer in one batch
# when using `WriteFile` command which uses `FileChannel.transferTo` to
# pipe files to a TCP socket. On some OS like Linux `FileChannel.transferTo`
# may block for a long time when network IO is faster than file IO.
# Decreasing the value may improve fairness while increasing may improve
# throughput.
file-io-transferTo-limit = 512 KiB

# The number of times to retry the `finishConnect` call after being notified about
# OP_CONNECT. Retries are needed if the OP_CONNECT notification doesn't imply that
# `finishConnect` will succeed, which is the case on Android.
finish-connect-retries = 5
}

udp {

# The number of selectors to stripe the served channels over; each of
# these will use one select loop on the selector-dispatcher.
nr-of-selectors = 1

# Maximum number of open channels supported by this UDP module Generally
# UDP does not require a large number of channels, therefore it is
# recommended to keep this setting low.
max-channels = 4096

# The select loop can be used in two modes:
# - setting "infinite" will select without a timeout, hogging a thread
# - setting a positive timeout will do a bounded select call,
#   enabling sharing of a single thread between multiple selectors
#   (in this case you will have to use a different configuration for the
#   selector-dispatcher, e.g. using "type=Dispatcher" with size 1)
# - setting it to zero means polling, i.e. calling selectNow()
select-timeout = infinite

# When trying to assign a new connection to a selector and the chosen
# selector is at full capacity, retry selector choosing and assignment
# this many times before giving up
selector-association-retries = 10

# The maximum number of datagrams that are read in one go,
# higher numbers decrease latency, lower numbers increase fairness on
# the worker-dispatcher
receive-throughput = 3

# The number of bytes per direct buffer in the pool used to read or write
# network data from the kernel.
direct-buffer-size = 128 KiB

# The maximal number of direct buffers kept in the direct buffer pool for
# reuse.
direct-buffer-pool-limit = 1000

# The maximum number of bytes delivered by a `Received` message. Before
# more data is read from the network the connection actor will try to
# do other work.
received-message-size-limit = unlimited

```

```

# Enable fine grained logging of what goes on inside the implementation.
# Be aware that this may log more than once per message sent to the actors
# of the tcp implementation.
trace-logging = off

# Fully qualified config path which holds the dispatcher configuration
# to be used for running the select() calls in the selectors
selector-dispatcher = "akka.io.pinned-dispatcher"

# Fully qualified config path which holds the dispatcher configuration
# for the read/write worker actors
worker-dispatcher = "akka.actor.default-dispatcher"

# Fully qualified config path which holds the dispatcher configuration
# for the selector management actors
management-dispatcher = "akka.actor.default-dispatcher"
}

udp-connected {

# The number of selectors to stripe the served channels over; each of
# these will use one select loop on the selector-dispatcher.
nr-of-selectors = 1

# Maximum number of open channels supported by this UDP module Generally
# UDP does not require a large number of channels, therefore it is
# recommended to keep this setting low.
max-channels = 4096

# The select loop can be used in two modes:
# - setting "infinite" will select without a timeout, hogging a thread
# - setting a positive timeout will do a bounded select call,
#   enabling sharing of a single thread between multiple selectors
#   (in this case you will have to use a different configuration for the
#   selector-dispatcher, e.g. using "type=Dispatcher" with size 1)
# - setting it to zero means polling, i.e. calling selectNow()
select-timeout = infinite

# When trying to assign a new connection to a selector and the chosen
# selector is at full capacity, retry selector choosing and assignment
# this many times before giving up
selector-association-retries = 10

# The maximum number of datagrams that are read in one go,
# higher numbers decrease latency, lower numbers increase fairness on
# the worker-dispatcher
receive-throughput = 3

# The number of bytes per direct buffer in the pool used to read or write
# network data from the kernel.
direct-buffer-size = 128 KiB

# The maximal number of direct buffers kept in the direct buffer pool for
# reuse.
direct-buffer-pool-limit = 1000

# The maximum number of bytes delivered by a `Received` message. Before
# more data is read from the network the connection actor will try to
# do other work.
received-message-size-limit = unlimited

# Enable fine grained logging of what goes on inside the implementation.

```

```

# Be aware that this may log more than once per message sent to the actors
# of the tcp implementation.
trace-logging = off

# Fully qualified config path which holds the dispatcher configuration
# to be used for running the select() calls in the selectors
selector-dispatcher = "akka.io.pinned-dispatcher"

# Fully qualified config path which holds the dispatcher configuration
# for the read/write worker actors
worker-dispatcher = "akka.actor.default-dispatcher"

# Fully qualified config path which holds the dispatcher configuration
# for the selector management actors
management-dispatcher = "akka.actor.default-dispatcher"
}

# IMPORTANT NOTICE:
#
# The following settings belong to the deprecated akka.actor.IO
# implementation and will be removed once that is removed. They are not
# taken into account by the akka.io.* implementation, which is configured
# above!

# In bytes, the size of the shared read buffer. In the span 0b..2GiB.
#
read-buffer-size = 8KiB

# Specifies how many ops are done between every descriptor selection
select-interval = 100

# Number of connections that are allowed in the backlog.
# 0 or negative means that the platform default will be used.
default-backlog = 1000
}
}

```

akka-remote

```

#####
# Akka Remote Reference Config File #
#####

# This is the reference config file that contains all the default settings.
# Make your edits/overrides in your application.conf.

# comments about akka.actor settings left out where they are already in akka-
# actor.jar, because otherwise they would be repeated in config rendering.

akka {

  actor {

    serializers {
      akka-containers = "akka.remote.serialization.MessageContainerSerializer"
      proto = "akka.remote.serialization.ProtoBufSerializer"
      daemon-create = "akka.remote.serialization.DaemonMsgCreateSerializer"
    }
  }
}

```

```

serialization-bindings {
  # Since com.google.protobuf.Message does not extend Serializable but
  # GeneratedMessage does, need to use the more specific one here in order
  # to avoid ambiguity
  "akka.actor.SelectionPath" = akka-containers
  "com.google.protobuf.GeneratedMessage" = proto
  "akka.remote.DaemonMsgCreate" = daemon-create
}

deployment {

  default {

    # if this is set to a valid remote address, the named actor will be
    # deployed at that node e.g. "akka://sys@host:port"
    remote = ""

    target {

      # A list of hostnames and ports for instantiating the children of a
      # router
      # The format should be on "akka://sys@host:port", where:
      # - sys is the remote actor system name
      # - hostname can be either hostname or IP address the remote actor
      # should connect to
      # - port should be the port for the remote server on the other node
      # The number of actor instances to be spawned is still taken from the
      # nr-of-instances setting as for local routers; the instances will be
      # distributed round-robin among the given nodes.
      nodes = []

    }
  }
}

remote {

  ### General settings

  # Timeout after which the startup of the remoting subsystem is considered
  # to be failed. Increase this value if your transport drivers (see the
  # enabled-transport section) need longer time to be loaded.
  startup-timeout = 10 s

  # Timeout after which the graceful shutdown of the remoting subsystem is
  # considered to be failed. After the timeout the remoting system is
  # forcefully shut down. Increase this value if your transport drivers
  # (see the enabled-transport section) need longer time to stop properly.
  shutdown-timeout = 10 s

  # Before shutting down the drivers, the remoting subsystem attempts to flush
  # all pending writes. This setting controls the maximum time the remoting is
  # willing to wait before moving on to shut down the drivers.
  flush-wait-on-shutdown = 2 s

  # Reuse inbound connections for outbound messages
  use-passive-connections = on

  # Controls the backoff interval after a refused write is reattempted.
  # (Transports may refuse writes if their internal buffer is full)

```

```

backoff-interval = 0.01 s

# Acknowledgment timeout of management commands sent to the transport stack.
command-ack-timeout = 30 s

# If set to a nonempty string remoting will use the given dispatcher for
# its internal actors otherwise the default dispatcher is used. Please note
# that since remoting can load arbitrary 3rd party drivers (see
# "enabled-transport" and "adapters" entries) it is not guaranteed that
# every module will respect this setting.
use-dispatcher = ""

### Security settings

# Enable untrusted mode for full security of server managed actors, prevents
# system messages to be send by clients, e.g. messages like 'Create',
# 'Suspend', 'Resume', 'Terminate', 'Supervise', 'Link' etc.
untrusted-mode = off

# Should the remote server require that its peers share the same
# secure-cookie (defined in the 'remote' section)? Secure cookies are passed
# between during the initial handshake. Connections are refused if the initial
# message contains a mismatching cookie or the cookie is missing.
require-cookie = off

# Generate your own with the script availbale in
# '$AKKA_HOME/scripts/generate_config_with_secure_cookie.sh' or using
# 'akka.util.Crypt.generateSecureCookie'
secure-cookie = ""

### Logging

# If this is "on", Akka will log all inbound messages at DEBUG level,
# if off then they are not logged
log-received-messages = off

# If this is "on", Akka will log all outbound messages at DEBUG level,
# if off then they are not logged
log-sent-messages = off

# Sets the log granularity level at which Akka logs remoting events. This setting
# can take the values OFF, ERROR, WARNING, INFO, DEBUG, or ON. For compatibility
# reasons the setting "on" will default to "debug" level. Please note that the effective
# logging level is still determined by the global logging level of the actor system:
# for example debug level remoting events will be only logged if the system
# is running with debug level logging.
# Failures to deserialize received messages also fall under this flag.
log-remote-lifecycle-events = on

# Logging of message types with payload size in bytes larger than
# this value. Maximum detected size per message type is logged once,
# with an increase threshold of 10%.
# By default this feature is turned off. Activate it by setting the property to
# a value in bytes, such as 1000b. Note that for all messages larger than this
# limit there will be extra performance and scalability cost.
log-frame-size-exceeding = off

### Failure detection and recovery

# Settings for the Phi accrual failure detector (http://ddg.jaist.ac.jp/pub/HDY+04.pdf)
# [Hayashibara et al]) used by the remoting subsystem to detect failed
# connections.
transport-failure-detector {

```

```

# FQCN of the failure detector implementation.
# It must implement akka.remote.FailureDetector and have
# a public constructor with a com.typesafe.config.Config and
# akka.actor.EventStream parameter.
implementation-class = "akka.remote.PhiAccrualFailureDetector"

# How often keep-alive heartbeat messages should be sent to each connection.
heartbeat-interval = 1 s

# Defines the failure detector threshold.
# A low threshold is prone to generate many wrong suspicions but ensures
# a quick detection in the event of a real crash. Conversely, a high
# threshold generates fewer mistakes but needs more time to detect
# actual crashes.
threshold = 7.0

# Number of the samples of inter-heartbeat arrival times to adaptively
# calculate the failure timeout for connections.
max-sample-size = 100

# Minimum standard deviation to use for the normal distribution in
# AccrualFailureDetector. Too low standard deviation might result in
# too much sensitivity for sudden, but normal, deviations in heartbeat
# inter arrival times.
min-std-deviation = 100 ms

# Number of potentially lost/delayed heartbeats that will be
# accepted before considering it to be an anomaly.
# This margin is important to be able to survive sudden, occasional,
# pauses in heartbeat arrivals, due to for example garbage collect or
# network drop.
acceptable-heartbeat-pause = 3 s
}

# Settings for the Phi accrual failure detector (http://ddg.jaist.ac.jp/pub/HDY+04.pdf
# [Hayashibara et al]) used for remote death watch.
watch-failure-detector {

# FQCN of the failure detector implementation.
# It must implement akka.remote.FailureDetector and have
# a public constructor with a com.typesafe.config.Config and
# akka.actor.EventStream parameter.
implementation-class = "akka.remote.PhiAccrualFailureDetector"

# How often keep-alive heartbeat messages should be sent to each connection.
heartbeat-interval = 1 s

# Defines the failure detector threshold.
# A low threshold is prone to generate many wrong suspicions but ensures
# a quick detection in the event of a real crash. Conversely, a high
# threshold generates fewer mistakes but needs more time to detect
# actual crashes.
threshold = 10.0

# Number of the samples of inter-heartbeat arrival times to adaptively
# calculate the failure timeout for connections.
max-sample-size = 200

# Minimum standard deviation to use for the normal distribution in
# AccrualFailureDetector. Too low standard deviation might result in
# too much sensitivity for sudden, but normal, deviations in heartbeat
# inter arrival times.

```

```

min-std-deviation = 100 ms

# Number of potentially lost/delayed heartbeats that will be
# accepted before considering it to be an anomaly.
# This margin is important to be able to survive sudden, occasional,
# pauses in heartbeat arrivals, due to for example garbage collect or
# network drop.
acceptable-heartbeat-pause = 4 s

# How often to check for nodes marked as unreachable by the failure
# detector
unreachable-nodes-reaper-interval = 1s

# After the heartbeat request has been sent the first failure detection
# will start after this period, even though no heartbeat message has
# been received.
expected-response-after = 3 s

}

# After failed to establish an outbound connection, the remoting will mark the
# address as failed. This configuration option controls how much time should
# be elapsed before reattempting a new connection. While the address is
# gated, all messages sent to the address are delivered to dead-letters.
# If this setting is 0, the remoting will always immediately reattempt
# to establish a failed outbound connection and will buffer writes until
# it succeeds.
retry-gate-closed-for = 0 s

# If the retry gate function is disabled (see retry-gate-closed-for) the
# remoting subsystem will always attempt to reestablish failed outbound
# connections. The settings below together control the maximum number of
# reattempts in a given time window. The number of reattempts during
# a window of "retry-window" will be maximum "maximum-retries-in-window".
retry-window = 60 s
maximum-retries-in-window = 3

# The length of time to gate an address whose name lookup has failed
# or has explicitly signalled that it will not accept connections
# (remote system is shutting down or the requesting system is quarantined).
# No connection attempts will be made to an address while it remains
# gated. Any messages sent to a gated address will be directed to dead
# letters instead. Name lookups are costly, and the time to recovery
# is typically large, therefore this setting should be a value in the
# order of seconds or minutes.
gate-invalid-addresses-for = 60 s

# This settings controls how long a system will be quarantined after
# catastrophic communication failures that result in the loss of system
# messages. Quarantining prevents communication with the remote system
# of a given UID. This function can be disabled by setting the value
# to "off".
quarantine-systems-for = 60s

# This setting defines the maximum number of unacknowledged system messages
# allowed for a remote system. If this limit is reached the remote system is
# declared to be dead and its UID marked as tainted.
system-message-buffer-size = 1000

# This setting defines the maximum idle time after an individual
# acknowledgement for system messages is sent. System message delivery
# is guaranteed by explicit acknowledgement messages. These acks are

```

```

# piggybacked on ordinary traffic messages. If no traffic is detected
# during the time period configured here, the remoting will send out
# an individual ack.
system-message-ack-piggyback-timeout = 1 s

# This setting defines the time after messages that have not been
# explicitly acknowledged or negatively acknowledged are resent.
# Messages that were negatively acknowledged are always immediately
# resent.
resend-interval = 1 s

### Transports and adapters

# List of the transport drivers that will be loaded by the remoting.
# A list of fully qualified config paths must be provided where
# the given configuration path contains a transport-class key
# pointing to an implementation class of the Transport interface.
# If multiple transports are provided, the address of the first
# one will be used as a default address.
enabled-transports = ["akka.remote.netty.tcp"]

# Transport drivers can be augmented with adapters by adding their
# name to the applied-adapters setting in the configuration of a
# transport. The available adapters should be configured in this
# section by providing a name, and the fully qualified name of
# their corresponding implementation. The class given here
# must implement akka.akka.remote.transport.TransportAdapterProvider
# and have public constructor without parameters.
adapters {
  gremlin = "akka.remote.transport.FailureInjectorProvider"
  trttl = "akka.remote.transport.ThrottlerProvider"
}

### Default configuration for the Netty based transport drivers

netty.tcp {
  # The class given here must implement the akka.remote.transport.Transport
  # interface and offer a public constructor which takes two arguments:
  # 1) akka.actor.ExtendedActorSystem
  # 2) com.typesafe.config.Config
  transport-class = "akka.remote.transport.netty.NettyTransport"

  # Transport drivers can be augmented with adapters by adding their
  # name to the applied-adapters list. The last adapter in the
  # list is the adapter immediately above the driver, while
  # the first one is the top of the stack below the standard
  # Akka protocol
  applied-adapters = []

  transport-protocol = tcp

  # The default remote server port clients should connect to.
  # Default is 2552 (AKKA), use 0 if you want a random available port
  # This port needs to be unique for each actor system on the same machine.
  port = 2552

  # The hostname or ip to bind the remoting to,
  # InetAddress.getLocalHost.getHostAddress is used if empty
  hostname = ""

  # Enables SSL support on this transport
  enable-ssl = false

```

```

# Sets the connectTimeoutMillis of all outbound connections,
# i.e. how long a connect may take until it is timed out
connection-timeout = 15 s

# If set to "<id.of.dispatcher>" then the specified dispatcher
# will be used to accept inbound connections, and perform IO. If "" then
# dedicated threads will be used.
# Please note that the Netty driver only uses this configuration and does
# not read the "akka.remote.use-dispatcher" entry. Instead it has to be
# configured manually to point to the same dispatcher if needed.
use-dispatcher-for-io = ""

# Sets the high water mark for the in and outbound sockets,
# set to 0b for platform default
write-buffer-high-water-mark = 0b

# Sets the low water mark for the in and outbound sockets,
# set to 0b for platform default
write-buffer-low-water-mark = 0b

# Sets the send buffer size of the Sockets,
# set to 0b for platform default
send-buffer-size = 256000b

# Sets the receive buffer size of the Sockets,
# set to 0b for platform default
receive-buffer-size = 256000b

# Maximum message size the transport will accept, but at least
# 32000 bytes.
# Please note that UDP does not support arbitrary large datagrams,
# so this setting has to be chosen carefully when using UDP.
# Both send-buffer-size and receive-buffer-size settings has to
# be adjusted to be able to buffer messages of maximum size.
maximum-frame-size = 128000b

# Sets the size of the connection backlog
backlog = 4096

# Enables the TCP_NODELAY flag, i.e. disables Nagle's algorithm
tcp-nodelay = on

# Enables TCP Keepalive, subject to the O/S kernel's configuration
tcp-keepalive = on

# Enables SO_REUSEADDR, which determines when an ActorSystem can open
# the specified listen port (the meaning differs between *nix and Windows)
# Valid values are "on", "off" and "off-for-windows"
# due to the following Windows bug: http://bugs.sun.com/bugdatabase/view\_bug.do?bug\_id=4476
# "off-for-windows" of course means that it's "on" for all other platforms
tcp-reuse-addr = off-for-windows

# Used to configure the number of I/O worker threads on server sockets
server-socket-worker-pool {
  # Min number of threads to cap factor-based number to
  pool-size-min = 2

  # The pool size factor is used to determine thread pool size
  # using the following formula: ceil(available processors * factor).
  # Resulting size is then bounded by the pool-size-min and
  # pool-size-max values.
  pool-size-factor = 1.0
}

```

```

    # Max number of threads to cap factor-based number to
    pool-size-max = 2
  }

  # Used to configure the number of I/O worker threads on client sockets
  client-socket-worker-pool {
    # Min number of threads to cap factor-based number to
    pool-size-min = 2

    # The pool size factor is used to determine thread pool size
    # using the following formula: ceil(available processors * factor).
    # Resulting size is then bounded by the pool-size-min and
    # pool-size-max values.
    pool-size-factor = 1.0

    # Max number of threads to cap factor-based number to
    pool-size-max = 2
  }

}

netty.udp = ${akka.remote.netty.tcp}
netty.udp {
  transport-protocol = udp
}

netty.ssl = ${akka.remote.netty.tcp}
netty.ssl = {
  # Enable SSL/TLS encryption.
  # This must be enabled on both the client and server to work.
  enable-ssl = true

  security {
    # This is the Java Key Store used by the server connection
    key-store = "keystore"

    # This password is used for decrypting the key store
    key-store-password = "changeme"

    # This password is used for decrypting the key
    key-password = "changeme"

    # This is the Java Key Store used by the client connection
    trust-store = "truststore"

    # This password is used for decrypting the trust store
    trust-store-password = "changeme"

    # Protocol to use for SSL encryption, choose from:
    # Java 6 & 7:
    #   'SSLv3', 'TLSv1'
    # Java 7:
    #   'TLSv1.1', 'TLSv1.2'
    protocol = "TLSv1"

    # Example: ["TLS_RSA_WITH_AES_128_CBC_SHA", "TLS_RSA_WITH_AES_256_CBC_SHA"]
    # You need to install the JCE Unlimited Strength Jurisdiction Policy
    # Files to use AES 256.
    # More info here:
    # http://docs.oracle.com/javase/7/docs/technotes/guides/security/SunProviders.html#SunJCE
    enabled-algorithms = ["TLS_RSA_WITH_AES_128_CBC_SHA"]
  }
}

```

```

# There are three options, in increasing order of security:
# "" or SecureRandom => (default)
# "SHA1PRNG" => Can be slow because of blocking issues on Linux
# "AES128CounterSecureRNG" => fastest startup and based on AES encryption
# algorithm
# "AES256CounterSecureRNG"
# The following use one of 3 possible seed sources, depending on
# availability: /dev/random, random.org and SecureRandom (provided by Java)
# "AES128CounterInetRNG"
# "AES256CounterInetRNG" (Install JCE Unlimited Strength Jurisdiction
# Policy Files first)
# Setting a value here may require you to supply the appropriate cipher
# suite (see enabled-algorithms section above)
random-number-generator = ""
}
}

### Default configuration for the failure injector transport adapter

gremlin {
  # Enable debug logging of the failure injector transport adapter
  debug = off
}

}
}

```

akka-testkit

```

#####
# Akka Testkit Reference Config File #
#####

# This is the reference config file that contains all the default settings.
# Make your edits/overrides in your application.conf.

akka {
  test {
    # factor by which to scale timeouts during tests, e.g. to account for shared
    # build system load
    timefactor = 1.0

    # duration of EventFilter.intercept waits after the block is finished until
    # all required messages are received
    filter-leeway = 3s

    # duration to wait in expectMsg and friends outside of within() block
    # by default
    single-expect-default = 3s

    # The timeout that is added as an implicit by DefaultTimeout trait
    default-timeout = 5s

    calling-thread-dispatcher {
      type = akka.testkit.CallingThreadDispatcherConfigurator
    }
  }
}
}

```

akka-camel

```
#####
# Akka Camel Reference Config File #
#####

# This is the reference config file that contains all the default settings.
# Make your edits/overrides in your application.conf.

akka {
  camel {
    # Whether JMX should be enabled or disabled for the Camel Context
    jmx = off
    # enable/disable streaming cache on the Camel Context
    streamingCache = on
    consumer {
      # Configured setting which determines whether one-way communications
      # between an endpoint and this consumer actor
      # should be auto-acknowledged or application-acknowledged.
      # This flag has only effect when exchange is in-only.
      auto-ack = on

      # When endpoint is out-capable (can produce responses) reply-timeout is the
      # maximum time the endpoint can take to send the response before the message
      # exchange fails. This setting is used for out-capable, in-only,
      # manually acknowledged communication.
      reply-timeout = 1m

      # The duration of time to await activation of an endpoint.
      activation-timeout = 10s
    }

    #Scheme to FQCN mappings for CamelMessage body conversions
    conversions {
      "file" = "java.io.InputStream"
    }
  }
}
}
```

akka-cluster

```
#####
# Akka Cluster Reference Config File #
#####

# This is the reference config file that contains all the default settings.
# Make your edits/overrides in your application.conf.

akka {

  cluster {
    # Initial contact points of the cluster.
    # The nodes to join automatically at startup.
    # Comma separated full URIs defined by a string on the form of
    # "akka://system@hostname:port"
    # Leave as empty if the node is supposed to be joined manually.
    seed-nodes = []

    # how long to wait for one of the seed nodes to reply to initial join request
    seed-node-timeout = 5s
  }
}
```

```

# If a join request fails it will be retried after this period.
# Disable join retry by specifying "off".
retry-unsuccessful-join-after = 10s

# Should the 'leader' in the cluster be allowed to automatically mark
# unreachable nodes as DOWN?
# Using auto-down implies that two separate clusters will automatically be
# formed in case of network partition.
auto-down = off

# The roles of this member. List of strings, e.g. roles = ["A", "B"].
# The roles are part of the membership information and can be used by
# routers or other services to distribute work to certain member types,
# e.g. front-end and back-end nodes.
roles = []

role {
  # Minimum required number of members of a certain role before the leader
  # changes member status of 'Joining' members to 'Up'. Typically used together
  # with 'Cluster.registerOnMemberUp' to defer some action, such as starting
  # actors, until the cluster has reached a certain size.
  # E.g. to require 2 nodes with role 'frontend' and 3 nodes with role 'backend':
  #   frontend.min-nr-of-members = 2
  #   backend.min-nr-of-members = 3
  #<role-name>.min-nr-of-members = 1
}

# Minimum required number of members before the leader changes member status
# of 'Joining' members to 'Up'. Typically used together with
# 'Cluster.registerOnMemberUp' to defer some action, such as starting actors,
# until the cluster has reached a certain size.
min-nr-of-members = 1

# Enable/disable info level logging of cluster events
log-info = on

# Enable or disable JMX MBeans for management of the cluster
jmx.enabled = on

# how long should the node wait before starting the periodic tasks
# maintenance tasks?
periodic-tasks-initial-delay = 1s

# how often should the node send out gossip information?
gossip-interval = 1s

# how often should the leader perform maintenance tasks?
leader-actions-interval = 1s

# how often should the node move nodes, marked as unreachable by the failure
# detector, out of the membership ring?
unreachable-nodes-reaper-interval = 1s

# How often the current internal stats should be published.
# A value of 0s can be used to always publish the stats, when it happens.
# Disable with "off".
publish-stats-interval = off

# The id of the dispatcher to use for cluster actors. If not specified
# default dispatcher is used.
# If specified you need to define the settings of the actual dispatcher.
use-dispatcher = ""

```

```

# Gossip to random node with newer or older state information, if any with
# this probability. Otherwise Gossip to any random live node.
# Probability value is between 0.0 and 1.0. 0.0 means never, 1.0 means always.
gossip-different-view-probability = 0.8

# Settings for the Phi accrual failure detector (http://ddg.jaist.ac.jp/pub/HDY+04.pdf
# [Hayashibara et al]) used by the cluster subsystem to detect unreachable
# members.
failure-detector {

  # FQCN of the failure detector implementation.
  # It must implement akka.remote.FailureDetector and have
  # a public constructor with a com.typesafe.config.Config and
  # akka.actor.EventStream parameter.
  implementation-class = "akka.remote.PhiAccrualFailureDetector"

  # How often keep-alive heartbeat messages should be sent to each connection.
  heartbeat-interval = 1 s

  # Defines the failure detector threshold.
  # A low threshold is prone to generate many wrong suspicions but ensures
  # a quick detection in the event of a real crash. Conversely, a high
  # threshold generates fewer mistakes but needs more time to detect
  # actual crashes.
  threshold = 8.0

  # Number of the samples of inter-heartbeat arrival times to adaptively
  # calculate the failure timeout for connections.
  max-sample-size = 1000

  # Minimum standard deviation to use for the normal distribution in
  # AccrualFailureDetector. Too low standard deviation might result in
  # too much sensitivity for sudden, but normal, deviations in heartbeat
  # inter arrival times.
  min-std-deviation = 100 ms

  # Number of potentially lost/delayed heartbeats that will be
  # accepted before considering it to be an anomaly.
  # This margin is important to be able to survive sudden, occasional,
  # pauses in heartbeat arrivals, due to for example garbage collect or
  # network drop.
  acceptable-heartbeat-pause = 3 s

  # Number of member nodes that each member will send heartbeat messages to,
  # i.e. each node will be monitored by this number of other nodes.
  monitored-by-nr-of-members = 5

  # When a node stops sending heartbeats to another node it will end that
  # with this number of EndHeartbeat messages, which will remove the
  # monitoring from the failure detector.
  nr-of-end-heartbeats = 8

  # When no expected heartbeat message has been received an explicit
  # heartbeat request is sent to the node that should emit heartbeats.
  heartbeat-request {
    # Grace period until an explicit heartbeat request is sent
    grace-period = 10 s

    # After the heartbeat request has been sent the first failure detection
    # will start after this period, even though no heartbeat message has
    # been received.
    expected-response-after = 3 s
  }
}

```

```

    # Cleanup of obsolete heartbeat requests
    time-to-live = 60 s
  }
}

metrics {
  # Enable or disable metrics collector for load-balancing nodes.
  enabled = on

  # FQCN of the metrics collector implementation.
  # It must implement akka.cluster.MetricsCollector and
  # have public constructor with akka.actor.ActorSystem parameter.
  # The default SigarMetricsCollector uses JMX and Hyperic SIGAR, if SIGAR
  # is on the classpath, otherwise only JMX.
  collector-class = "akka.cluster.SigarMetricsCollector"

  # How often metrics are sampled on a node.
  # Shorter interval will collect the metrics more often.
  collect-interval = 3s

  # How often a node publishes metrics information.
  gossip-interval = 3s

  # How quickly the exponential weighting of past data is decayed compared to
  # new data. Set lower to increase the bias toward newer values.
  # The relevance of each data sample is halved for every passing half-life
  # duration, i.e. after 4 times the half-life, a data sample's relevance is
  # reduced to 6% of its original relevance. The initial relevance of a data
  # sample is given by  $1 - 0.5^{(\text{collect-interval} / \text{half-life})}$ .
  # See http://en.wikipedia.org/wiki/Moving\_average#Exponential\_moving\_average
  moving-average-half-life = 12s
}

# If the tick-duration of the default scheduler is longer than the
# tick-duration configured here a dedicated scheduler will be used for
# periodic tasks of the cluster, otherwise the default scheduler is used.
# See akka.scheduler settings for more details.
scheduler {
  tick-duration = 33ms
  ticks-per-wheel = 512
}

}

# Default configuration for routers
actor.deployment.default {
  # MetricsSelector to use
  # - available: "mix", "heap", "cpu", "load"
  # - or: Fully qualified class name of the MetricsSelector class.
  #       The class must extend akka.cluster.routing.MetricsSelector
  #       and have a public constructor with com.typesafe.config.Config
  #       parameter.
  # - default is "mix"
  metrics-selector = mix
}

actor.deployment.default.cluster {
  # enable cluster aware router that deploys to nodes in the cluster
  enabled = off

  # Maximum number of routees that will be deployed on each cluster
  # member node.
  # Note that nr-of-instances defines total number of routees, but
  # number of routees per node will not be exceeded, i.e. if you

```

```

# define nr-of-instances = 50 and max-nr-of-instances-per-node = 2
# it will deploy 2 routees per new member in the cluster, up to
# 25 members.
max-nr-of-instances-per-node = 1

# Defines if routees are allowed to be located on the same node as
# the head router actor, or only on remote nodes.
# Useful for master-worker scenario where all routees are remote.
allow-local-routees = on

# Actor path of the routees to lookup with actorFor on the member
# nodes in the cluster. E.g. "/user/myservice". If this isn't defined
# the routees will be deployed instead of looked up.
# max-nr-of-instances-per-node should not be configured (default value is 1)
# when routees-path is defined.
routees-path = ""

# Use members with specified role, or all members if undefined or empty.
use-role = ""

}

# Protobuf serializer for cluster messages
actor {
  serializers {
    akka-cluster = "akka.cluster.protobuf.ClusterMessageSerializer"
  }

  serialization-bindings {
    "akka.cluster.ClusterMessage" = akka-cluster
  }
}
}

```

akka-transactor

```

#####
# Akka Transactor Reference Config File #
#####

# This is the reference config file that contains all the default settings.
# Make your edits/overrides in your application.conf.

akka {
  transactor {
    # The timeout used for coordinated transactions across actors
    coordinated-timeout = 5s
  }
}

```

akka-agent

```

#####
# Akka Agent Reference Config File #
#####

# This is the reference config file that contains all the default settings.
# Make your edits/overrides in your application.conf.

```

```
akka {
  agent {

    # The dispatcher used for agent-send-off actor
    send-off-dispatcher {
      executor = thread-pool-executor
      type = PinnedDispatcher
    }

    # The dispatcher used for agent-alter-off actor
    alter-off-dispatcher {
      executor = thread-pool-executor
      type = PinnedDispatcher
    }
  }
}
```

akka-zeromq

```
#####
# Akka ZeroMQ Reference Config File #
#####

# This is the reference config file that contains all the default settings.
# Make your edits/overrides in your application.conf.

akka {

  zeromq {

    # The default timeout for a poll on the actual zeromq socket.
    poll-timeout = 100ms

    # Timeout for creating a new socket
    new-socket-timeout = 5s

    socket-dispatcher {
      # A zeromq socket needs to be pinned to the thread that created it.
      # Changing this value results in weird errors and race conditions within
      # zeromq
      executor = thread-pool-executor
      type = "PinnedDispatcher"
      thread-pool-executor.allow-core-timeout = off
    }
  }
}
```

akka-file-mailbox

```
#####
# Akka File Mailboxes Reference Config File #
#####

# This is the reference config file that contains all the default settings.
# Make your edits/overrides in your application.conf.
#
# For more information see <https://github.com/robey/kestrel/>

akka {
  actor {
```

```
mailbox {
  file-based {
    # directory below which this queue resides
    directory-path = "./_mb"

    # attempting to add an item after the queue reaches this size (in items)
    # will fail.
    max-items = 2147483647

    # attempting to add an item after the queue reaches this size (in bytes)
    # will fail.
    max-size = 2147483647 bytes

    # attempting to add an item larger than this size (in bytes) will fail.
    max-item-size = 2147483647 bytes

    # maximum expiration time for this queue (seconds).
    max-age = 0s

    # maximum journal size before the journal should be rotated.
    max-journal-size = 16 MiB

    # maximum size of a queue before it drops into read-behind mode.
    max-memory-size = 128 MiB

    # maximum overflow (multiplier) of a journal file before we re-create it.
    max-journal-overflow = 10

    # absolute maximum size of a journal file until we rebuild it,
    # no matter what.
    max-journal-size-absolute = 9223372036854775807 bytes

    # whether to drop older items (instead of newer) when the queue is full
    discard-old-when-full = on

    # whether to keep a journal file at all
    keep-journal = on

    # whether to sync the journal after each transaction
    sync-journal = off

    # circuit breaker configuration
    circuit-breaker {
      # maximum number of failures before opening breaker
      max-failures = 3

      # duration of time beyond which a call is assumed to be timed out and
      # considered a failure
      call-timeout = 3 seconds

      # duration of time to wait until attempting to reset the breaker during
      # which all calls fail-fast
      reset-timeout = 30 seconds
    }
  }
}
```

ACTORS

3.1 Actors

The [Actor Model](#) provides a higher level of abstraction for writing concurrent and distributed systems. It alleviates the developer from having to deal with explicit locking and thread management, making it easier to write correct concurrent and parallel systems. Actors were defined in the 1973 paper by Carl Hewitt but have been popularized by the Erlang language, and used for example at Ericsson with great success to build highly concurrent and reliable telecom systems.

The API of Akka's Actors is similar to Scala Actors which has borrowed some of its syntax from Erlang.

3.1.1 Creating Actors

Note: Since Akka enforces parental supervision every actor is supervised and (potentially) the supervisor of its children, it is advisable that you familiarize yourself with [Actor Systems](#) and [Supervision and Monitoring](#) and it may also help to read [Actor References, Paths and Addresses](#).

Defining an Actor class

Actors in Java are implemented by extending the `UntypedActor` class and implementing the `onReceive` method. This method takes the message as a parameter.

Here is an example:

```
import akka.actor.UntypedActor;
import akka.event.Logging;
import akka.event.LoggingAdapter;

public class MyUntypedActor extends UntypedActor {
    LoggingAdapter log = Logging.getLogger(getContext().system(), this);

    public void onReceive(Object message) throws Exception {
        if (message instanceof String) {
            log.info("Received String message: {}", message);
            getSender().tell(message, getSelf());
        } else
            unhandled(message);
    }
}
```

Props

`Props` is a configuration class to specify options for the creation of actors, think of it as an immutable and thus freely shareable recipe for creating an actor including associated deployment information (e.g. which dispatcher

to use, see more below). Here are some examples of how to create a `Props` instance.

```
import akka.actor.Props;
import akka.japi.Creator;

static class MyActorC implements Creator<MyActor> {
    @Override public MyActor create() {
        return new MyActor("...");
    }
}

Props props1 = Props.create(MyUntypedActor.class);
Props props2 = Props.create(MyActor.class, "...");
Props props3 = Props.create(new MyActorC());
```

The second line shows how to pass constructor arguments to the `Actor` being created. The presence of a matching constructor is verified during construction of the `Props` object, resulting in an `IllegalArgumentException` if no or multiple matching constructors are found.

The third line demonstrates the use of a `Creator`. The creator class must be static, which is verified during `Props` construction. The type parameter's upper bound is used to determine the produced actor class, falling back to `Actor` if fully erased. An example of a parametric factory could be:

```
static class ParametricCreator<T extends MyActor> implements Creator<T> {
    @Override public T create() {
        // ... fabricate actor here
    }
}
```

Deprecated Variants

Up to Akka 2.1 there were also the following possibilities (which are retained for a migration period):

```
import akka.actor.UntypedActor;
import akka.actor.UntypedActorFactory;

// DEPRECATED: encourages to close over enclosing class
final Props props1 = new Props(new UntypedActorFactory() {
    private static final long serialVersionUID = 1L;
    @Override
    public UntypedActor create() throws Exception {
        return new MyUntypedActor();
    }
});

// DEPRECATED: encourages to close over enclosing class
final Props props2 = new Props().withCreator(new UntypedActorFactory() {
    private static final long serialVersionUID = 1L;
    @Override
    public UntypedActor create() throws Exception {
        return new MyUntypedActor();
    }
});

// these are DEPRECATED due to duplicate functionality with Props.create()
final Props props3 = new Props(MyUntypedActor.class);
final Props props4 = new Props().withCreator(MyUntypedActor.class);
```

The last two are deprecated because their functionality is available in full through `Props.create`.

The first two are deprecated because the resulting `UntypedActorFactory` is typically a local class which means that it implicitly carries a reference to the enclosing class. This can easily make the resulting `Props` non-serializable, e.g. when the enclosing class is an `Actor`. Akka advocates location transparency, meaning

that an application written with actors should just work when it is deployed over multiple network nodes, and non-serializable actor factories would break this principle. In case indirect actor creation is needed—for example when using dependency injection—there is the possibility to use an `IndirectActorProducer` as described below.

There were two use-cases for these methods: passing constructor arguments to the actor—which is solved by the newly introduced `Props.create` method above—and creating actors “on the spot” as anonymous classes. The latter should be solved by making these actors named inner classes instead (if they are not `static` then the enclosing instance’s `this` reference needs to be passed as the first argument).

Warning: Declaring one actor within another is very dangerous and breaks actor encapsulation unless the nested actor is a static inner class. Never pass an actor’s `this` reference into `Props`!

Recommended Practices

It is a good idea to provide static factory methods on the `UntypedActor` which help keeping the creation of suitable `Props` as close to the actor definition as possible, thus containing the gap in type-safety introduced by reflective instantiation within a single class instead of spreading it out across a whole code-base. This helps especially when refactoring the actor’s constructor signature at a later point, where compiler checks will allow this modification to be done with greater confidence than without.

```
public static class DemoActor extends UntypedActor {
    /**
     * Create Props for an actor of this type.
     * @param name The name to be passed to this actor's constructor.
     * @return a Props for creating this actor, which can then be further configured
     *         (e.g. calling .withDispatcher() on it)
     */
    public static Props mkProps(String name) {
        return Props.create(DemoActor.class, name);
    }

    final String name;

    public DemoActor(String name) {
        this.name = name;
    }

    @Override
    public void onReceive(Object msg) {
        // some behavior here
    }
}

system.actorOf(DemoActor.mkProps("hello"));
```

Creating Actors with Props

Actors are created by passing a `Props` instance into the `actorOf` factory method which is available on `ActorSystem` and `ActorContext`.

```
import akka.actor.ActorRef;
import akka.actor.ActorSystem;

// ActorSystem is a heavy object: create only one per application
final ActorSystem system = ActorSystem.create("MySystem");
```

```
final ActorRef myActor = system.actorOf(Props.create(MyUntypedActor.class),
    "myactor");
```

Using the `ActorSystem` will create top-level actors, supervised by the actor system's provided guardian actor, while using an actor's context will create a child actor.

```
class A extends UntypedActor {
    final ActorRef child =
        getContext().actorOf(Props.create(MyUntypedActor.class), "myChild");
    // plus some behavior ...
}
```

It is recommended to create a hierarchy of children, grand-children and so on such that it fits the logical failure-handling structure of the application, see *Actor Systems*.

The call to `actorOf` returns an instance of `ActorRef`. This is a handle to the actor instance and the only way to interact with it. The `ActorRef` is immutable and has a one to one relationship with the Actor it represents. The `ActorRef` is also serializable and network-aware. This means that you can serialize it, send it over the wire and use it on a remote host and it will still be representing the same Actor on the original node, across the network.

The name parameter is optional, but you should preferably name your actors, since that is used in log messages and for identifying actors. The name must not be empty or start with \$, but it may contain URL encoded characters (eg. %20 for a blank space). If the given name is already in use by another child to the same parent an `InvalidActorNameException` is thrown.

Actors are automatically started asynchronously when created.

Dependency Injection

If your `UntypedActor` has a constructor that takes parameters then those need to be part of the `Props` as well, as described above. But there are cases when a factory method must be used, for example when the actual constructor arguments are determined by a dependency injection framework.

```
import akka.actor.Actor;
import akka.actor.IndirectActorProducer;
```

```
class DependencyInjector implements IndirectActorProducer {
    final Object applicationContext;
    final String beanName;

    public DependencyInjector(Object applicationContext, String beanName) {
        this.applicationContext = applicationContext;
        this.beanName = beanName;
    }

    @Override
    public Class<? extends Actor> actorClass() {
        return MyActor.class;
    }

    @Override
    public MyActor produce() {
        MyActor result;
        // obtain fresh Actor instance from DI framework ...
        return result;
    }
}

final ActorRef myActor = getContext().actorOf(
    Props.create(DependencyInjector.class, applicationContext, "MyActor"),
    "myactor3");
```

Warning: You might be tempted at times to offer an `IndirectActorProducer` which always returns the same instance, e.g. by using a static field. This is not supported, as it goes against the meaning of an actor restart, which is described here: [What Restarting Means](#).
When using a dependency injection framework, actor beans *MUST NOT* have singleton scope.

Techniques for dependency injection and integration with dependency injection frameworks are described in more depth in the [Using Akka with Dependency Injection](#) guideline and the [Akka Java Spring](#) tutorial in `Typesafe Activator`.

The Inbox

When writing code outside of actors which shall communicate with actors, the `ask` pattern can be a solution (see below), but there are two things it cannot do: receiving multiple replies (e.g. by subscribing an `ActorRef` to a notification service) and watching other actors' lifecycle. For these purposes there is the `Inbox` class:

```
final Inbox inbox = Inbox.create(system);
inbox.send(target, "hello");
assert inbox.receive(Duration.create(1, TimeUnit.SECONDS)).equals("world");
```

The `send` method wraps a normal `tell` and supplies the internal actor's reference as the sender. This allows the reply to be received on the last line. Watching an actor is quite simple as well:

```
final Inbox inbox = Inbox.create(system);
inbox.watch(target);
target.tell(PoisonPill.getInstance(), ActorRef.noSender());
assert inbox.receive(Duration.create(1, TimeUnit.SECONDS)) instanceof Terminated;
```

3.1.2 UntypedActor API

The `UntypedActor` class defines only one abstract method, the above mentioned `onReceive(Object message)`, which implements the behavior of the actor.

If the current actor behavior does not match a received message, it's recommended that you call the `unhandled` method, which by default publishes a new `akka.actor.UnhandledMessage(message, sender, recipient)` on the actor system's event stream (set configuration item `akka.actor.debug.unhandled` to `on` to have them converted into actual `Debug` messages).

In addition, it offers:

- `getSelf()` reference to the `ActorRef` of the actor
- `getSender()` reference sender `Actor` of the last received message, typically used as described in [Reply to messages](#)
- `supervisorStrategy()` user overridable definition the strategy to use for supervising child actors

This strategy is typically declared inside the actor in order to have access to the actor's internal state within the decider function: since failure is communicated as a message sent to the supervisor and processed like other messages (albeit outside of the normal behavior), all values and variables within the actor are available, as is the `getSender()` reference (which will be the immediate child reporting the failure; if the original failure occurred within a distant descendant it is still reported one level up at a time).

- `getContext()` exposes contextual information for the actor and the current message, such as:
 - factory methods to create child actors (`actorOf`)
 - system that the actor belongs to
 - parent supervisor
 - supervised children
 - lifecycle monitoring

– hotswap behavior stack as described in *HotSwap*

The remaining visible methods are user-overridable life-cycle hooks which are described in the following:

```
public void preStart() {
}


public void preRestart(Throwable reason, scala.Option<Object> message) {
  for (ActorRef each : getContext().getChildren()) {
    getContext().unwatch(each);
    getContext().stop(each);
  }
  postStop();
}

public void postRestart(Throwable reason) {
  preStart();
}

public void postStop() {
}
```

The implementations shown above are the defaults provided by the `UntypedActor` class.

Actor Lifecycle

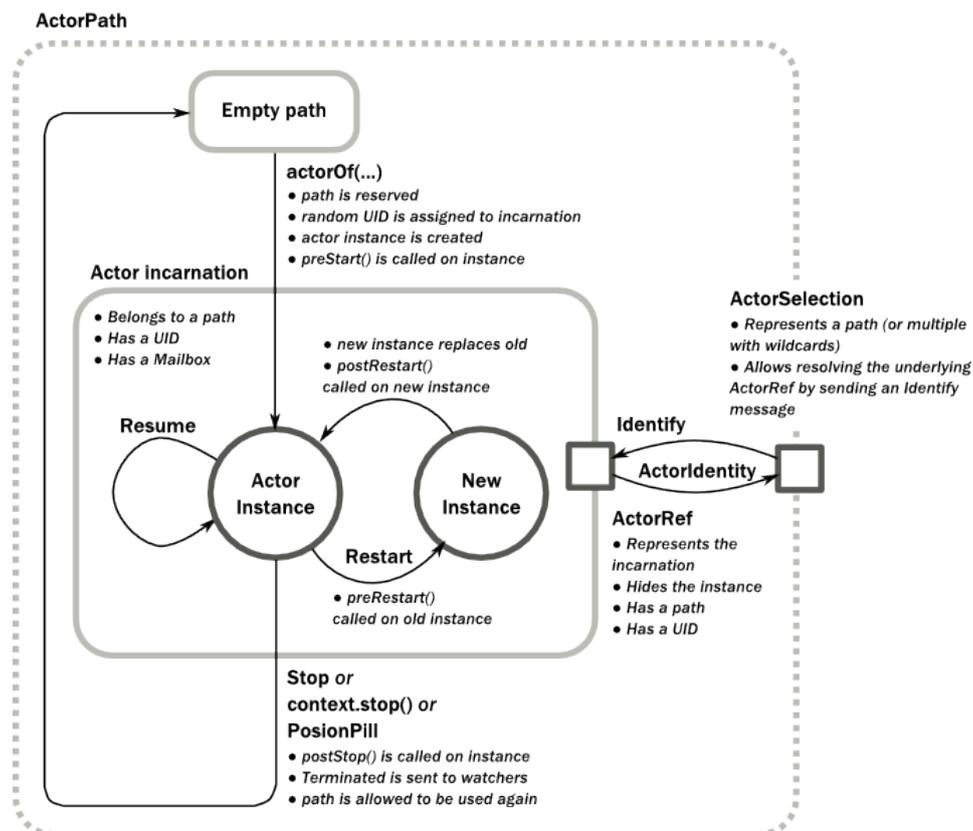

A path in an actor system represents a “place” which might be occupied by a living actor. Initially (apart from system initialized actors) a path is empty. When `actorOf()` is called it assigns an *incarnation* of the actor described by the passed `Props` to the given path. An actor incarnation is identified by the path *and a UID*. A restart only swaps the `Actor` instance defined by the `Props` but the incarnation and hence the UID remains the

same.

The lifecycle of an incarnation ends when the actor is stopped. At that point the appropriate lifecycle events are called and watching actors are notified of the termination. After the incarnation is stopped, the path can be reused again by creating an actor with `actorOf()`. In this case the name of the new incarnation will be the same as the previous one but the UIDs will differ.

An `ActorRef` always represents an incarnation (path and UID) not just a given path. Therefore if an actor is stopped and a new one with the same name is created an `ActorRef` of the old incarnation will not point to the new one.

`ActorSelection` on the other hand points to the path (or multiple paths if wildcards are used) and is completely oblivious to which incarnation is currently occupying it. `ActorSelection` cannot be watched for this reason. It is possible to resolve the current incarnation's `ActorRef` living under the path by sending an `Identify` message to the `ActorSelection` which will be replied to with an `ActorIdentity` containing the correct reference (see *Identifying Actors via Actor Selection*). This can also be done with the `resolveOne` method of the `ActorSelection`, which returns a `Future` of the matching `ActorRef`.

Lifecycle Monitoring aka DeathWatch

In order to be notified when another actor terminates (i.e. stops permanently, not temporary failure and restart), an actor may register itself for reception of the `Terminated` message dispatched by the other actor upon termination (see *Stopping Actors*). This service is provided by the `DeathWatch` component of the actor system.

Registering a monitor is easy (see fourth line, the rest is for demonstrating the whole functionality):

```
import akka.actor.Terminated;

public class WatchActor extends UntypedActor {
    final ActorRef child = this.getContext().actorOf(Props.empty(), "child");
    {
        this.getContext().watch(child); // <-- the only call needed for registration
    }
    ActorRef lastSender = getContext().system().deadLetters();

    @Override
    public void onReceive(Object message) {
        if (message.equals("kill")) {
            getContext().stop(child);
            lastSender = getSender();
        } else if (message instanceof Terminated) {
            final Terminated t = (Terminated) message;
            if (t.getActor() == child) {
                lastSender.tell("finished", getSelf());
            }
        } else {
            unhandled(message);
        }
    }
}
```

It should be noted that the `Terminated` message is generated independent of the order in which registration and termination occur. In particular, the watching actor will receive a `Terminated` message even if the watched actor has already been terminated at the time of registration.

Registering multiple times does not necessarily lead to multiple messages being generated, but there is no guarantee that only exactly one such message is received: if termination of the watched actor has generated and queued the message, and another registration is done before this message has been processed, then a second message will be queued, because registering for monitoring of an already terminated actor leads to the immediate generation of the `Terminated` message.

It is also possible to deregister from watching another actor's liveliness using `getContext().unwatch(target)`. This works even if the `Terminated` message has already

been enqueued in the mailbox; after calling `unwatch` no `Terminated` message for that actor will be processed anymore.

Start Hook

Right after starting the actor, its `preStart` method is invoked.

```
@Override
public void preStart() {
    child = getContext().actorOf(Props.empty());
}
```

This method is called when the actor is first created. During restarts it is called by the default implementation of `postRestart`, which means that by overriding that method you can choose whether the initialization code in this method is called only exactly once for this actor or for every restart. Initialization code which is part of the actor's constructor will always be called when an instance of the actor class is created, which happens at every restart.

Restart Hooks

All actors are supervised, i.e. linked to another actor with a fault handling strategy. Actors may be restarted in case an exception is thrown while processing a message (see *Supervision and Monitoring*). This restart involves the hooks mentioned above:

1. The old actor is informed by calling `preRestart` with the exception which caused the restart and the message which triggered that exception; the latter may be `None` if the restart was not caused by processing a message, e.g. when a supervisor does not trap the exception and is restarted in turn by its supervisor, or if an actor is restarted due to a sibling's failure. If the message is available, then that message's sender is also accessible in the usual way (i.e. by calling `getSender()`).

This method is the best place for cleaning up, preparing hand-over to the fresh actor instance, etc. By default it stops all children and calls `postStop`.

2. The initial factory from the `actorOf` call is used to produce the fresh instance.
3. The new actor's `postRestart` method is invoked with the exception which caused the restart. By default the `preStart` is called, just as in the normal start-up case.

An actor restart replaces only the actual actor object; the contents of the mailbox is unaffected by the restart, so processing of messages will resume after the `postRestart` hook returns. The message that triggered the exception will not be received again. Any message sent to an actor while it is being restarted will be queued to its mailbox as usual.

Warning: Be aware that the ordering of failure notifications relative to user messages is not deterministic. In particular, a parent might restart its child before it has processed the last messages sent by the child before the failure. See *Discussion: Message Ordering* for details.

Stop Hook

After stopping an actor, its `postStop` hook is called, which may be used e.g. for deregistering this actor from other services. This hook is guaranteed to run after message queuing has been disabled for this actor, i.e. messages sent to a stopped actor will be redirected to the `deadLetters` of the `ActorSystem`.

3.1.3 Identifying Actors via Actor Selection

As described in *Actor References, Paths and Addresses*, each actor has a unique logical path, which is obtained by following the chain of actors from child to parent until reaching the root of the actor system, and it has a physical path, which may differ if the supervision chain includes any remote supervisors. These paths are used

by the system to look up actors, e.g. when a remote message is received and the recipient is searched, but they are also useful more directly: actors may look up other actors by specifying absolute or relative paths—logical or physical—and receive back an `ActorSelection` with the result:

```
// will look up this absolute path
getContext().actorSelection("/user/serviceA/actor");
// will look up sibling beneath same supervisor
getContext().actorSelection("../joe");
```

The supplied path is parsed as a `java.net.URI`, which basically means that it is split on `/` into path elements. If the path starts with `/`, it is absolute and the look-up starts at the root guardian (which is the parent of `/user`); otherwise it starts at the current actor. If a path element equals `..`, the look-up will take a step “up” towards the supervisor of the currently traversed actor, otherwise it will step “down” to the named child. It should be noted that the `..` in actor paths here always means the logical structure, i.e. the supervisor.

The path elements of an actor selection may contain wildcard patterns allowing for broadcasting of messages to that section:

```
// will look all children to serviceB with names starting with worker
getContext().actorSelection("/user/serviceB/worker*");
// will look up all siblings beneath same supervisor
getContext().actorSelection("../*");
```

Messages can be sent via the `ActorSelection` and the path of the `ActorSelection` is looked up when delivering each message. If the selection does not match any actors the message will be dropped.

To acquire an `ActorRef` for an `ActorSelection` you need to send a message to the selection and use the `getSender` reference of the reply from the actor. There is a built-in `Identify` message that all Actors will understand and automatically reply to with a `ActorIdentity` message containing the `ActorRef`. This message is handled specially by the actors which are traversed in the sense that if a concrete name lookup fails (i.e. a non-wildcard path element does not correspond to a live actor) then a negative result is generated. Please note that this does not mean that delivery of that reply is guaranteed, it still is a normal message.

```
import akka.actor.ActorIdentity;
import akka.actor.ActorSelection;
import akka.actor.Identify;

public class Follower extends UntypedActor {
    final String identifyId = "1";
    {
        ActorSelection selection =
            getContext().actorSelection("/user/another");
        selection.tell(new Identify(identifyId), getSelf());
    }
    ActorRef another;

    final ActorRef probe;
    public Follower(ActorRef probe) {
        this.probe = probe;
    }

    @Override
    public void onReceive(Object message) {
        if (message instanceof ActorIdentity) {
            ActorIdentity identity = (ActorIdentity) message;
            if (identity.correlationId().equals(identifyId)) {
                ActorRef ref = identity.getRef();
                if (ref == null)
                    getContext().stop(getSelf());
                else {
                    another = ref;
                    getContext().watch(another);
                    probe.tell(ref, getSelf());
                }
            }
        }
    }
}
```

```

} else if (message instanceof Terminated) {
    final Terminated t = (Terminated) message;
    if (t.getActor().equals(another)) {
        getContext().stop(getSelf());
    }
} else {
    unhandled(message);
}
}
}

```

You can also acquire an `ActorRef` for an `ActorSelection` with the `resolveOne` method of the `ActorSelection`. It returns a `Future` of the matching `ActorRef` if such an actor exists. It is completed with failure `[[akka.actor.ActorNotFound]]` if no such actor exists or the identification didn't complete within the supplied *timeout*.

Remote actor addresses may also be looked up, if *remoting* is enabled:

```
getContext().actorSelection("akka.tcp://app@otherhost:1234/user/serviceB");
```

An example demonstrating remote actor look-up is given in [Remote Lookup](#).

Note: `actorFor` is deprecated in favor of `actorSelection` because actor references acquired with `actorFor` behave differently for local and remote actors. In the case of a local actor reference, the named actor needs to exist before the lookup, or else the acquired reference will be an `EmptyLocalActorRef`. This will be true even if an actor with that exact path is created after acquiring the actor reference. For remote actor references acquired with `actorFor` the behaviour is different and sending messages to such a reference will under the hood look up the actor by path on the remote system for every message send.

3.1.4 Messages and immutability

IMPORTANT: Messages can be any kind of object but have to be immutable. Akka can't enforce immutability (yet) so this has to be by convention.

Here is an example of an immutable message:

```

public class ImmutableMessage {
    private final int sequenceNumber;
    private final List<String> values;

    public ImmutableMessage(int sequenceNumber, List<String> values) {
        this.sequenceNumber = sequenceNumber;
        this.values = Collections.unmodifiableList(new ArrayList<String>(values));
    }

    public int getSequenceNumber() {
        return sequenceNumber;
    }

    public List<String> getValues() {
        return values;
    }
}

```

3.1.5 Send messages

Messages are sent to an Actor through one of the following methods.

- `tell` means “fire-and-forget”, e.g. send a message asynchronously and return immediately.
- `ask` sends a message asynchronously and returns a `Future` representing a possible reply.

Message ordering is guaranteed on a per-sender basis.

Note: There are performance implications of using `ask` since something needs to keep track of when it times out, there needs to be something that bridges a `Promise` into an `ActorRef` and it also needs to be reachable through remoting. So always prefer `tell` for performance, and only `ask` if you must.

In all these methods you have the option of passing along your own `ActorRef`. Make it a practice of doing so because it will allow the receiver actors to be able to respond to your message, since the sender reference is sent along with the message.

Tell: Fire-forget

This is the preferred way of sending messages. No blocking waiting for a message. This gives the best concurrency and scalability characteristics.

```
// don't forget to think about who is the sender (2nd argument)
target.tell(message, getSelf());
```

The sender reference is passed along with the message and available within the receiving actor via its `getSender` method while processing this message. Inside of an actor it is usually `getSelf` who shall be the sender, but there can be cases where replies shall be routed to some other actor—e.g. the parent—in which the second argument to `tell` would be a different one. Outside of an actor and if no reply is needed the second argument can be `null`; if a reply is needed outside of an actor you can use the `ask`-pattern described next..

Ask: Send-And-Receive-Future

The `ask` pattern involves actors as well as futures, hence it is offered as a use pattern rather than a method on `ActorRef`:

```
import static akka.pattern.Patterns.ask;
import static akka.pattern.Patterns.pipe;
import scala.concurrent.Future;
import scala.concurrent.duration.Duration;
import akka.dispatch.Futures;
import akka.dispatch.Mapper;
import akka.util.Timeout;

final Timeout t = new Timeout(Duration.create(5, TimeUnit.SECONDS));

final ArrayList<Future<Object>> futures = new ArrayList<Future<Object>>();
futures.add(ask(actorA, "request", 1000)); // using 1000ms timeout
futures.add(ask(actorB, "another request", t)); // using timeout from
// above

final Future<Iterable<Object>> aggregate = Futures.sequence(futures,
    system.dispatcher());

final Future<Result> transformed = aggregate.map(
    new Mapper<Iterable<Object>, Result>() {
        public Result apply(Iterable<Object> coll) {
            final Iterator<Object> it = coll.iterator();
            final String x = (String) it.next();
            final String s = (String) it.next();
            return new Result(x, s);
        }
    }, system.dispatcher());

pipe(transformed, system.dispatcher()).to(actorC);
```

This example demonstrates `ask` together with the `pipe` pattern on futures, because this is likely to be a common combination. Please note that all of the above is completely non-blocking and asynchronous: `ask` produces a `Future`, two of which are composed into a new future using the `Futures.sequence` and `map` methods and then `pipe` installs an `onComplete`-handler on the future to effect the submission of the aggregated `Result` to another actor.

Using `ask` will send a message to the receiving Actor as with `tell`, and the receiving actor must reply with `getSender().tell(reply, getSelf())` in order to complete the returned `Future` with a value. The `ask` operation involves creating an internal actor for handling this reply, which needs to have a timeout after which it is destroyed in order not to leak resources; see more below.

Warning: To complete the future with an exception you need send a `Failure` message to the sender. This is *not done automatically* when an actor throws an exception while processing a message.

```
try {
    String result = operation();
    getSender().tell(result, getSelf());
} catch (Exception e) {
    getSender().tell(new akka.actor.Status.Failure(e), getSelf());
    throw e;
}
```

If the actor does not complete the future, it will expire after the timeout period, specified as parameter to the `ask` method; this will complete the `Future` with an `AskTimeoutException`.

See [Futures](#) for more information on how to await or query a future.

The `onComplete`, `onSuccess`, or `onFailure` methods of the `Future` can be used to register a callback to get a notification when the `Future` completes. Gives you a way to avoid blocking.

Warning: When using future callbacks, inside actors you need to carefully avoid closing over the containing actor's reference, i.e. do not call methods or access mutable state on the enclosing actor from within the callback. This would break the actor encapsulation and may introduce synchronization bugs and race conditions because the callback will be scheduled concurrently to the enclosing actor. Unfortunately there is not yet a way to detect these illegal accesses at compile time. See also: [Actors and shared mutable state](#)

Forward message

You can forward a message from one actor to another. This means that the original sender address/reference is maintained even though the message is going through a 'mediator'. This can be useful when writing actors that work as routers, load-balancers, replicators etc. You need to pass along your context variable as well.

```
target.forward(result, getContext());
```

3.1.6 Receive messages

When an actor receives a message it is passed into the `onReceive` method, this is an abstract method on the `UntypedActor` base class that needs to be defined.

Here is an example:

```
import akka.actor.UntypedActor;
import akka.event.Logging;
import akka.event.LoggingAdapter;

public class MyUntypedActor extends UntypedActor {
    LoggingAdapter log = Logging.getLogger(getContext().system(), this);

    public void onReceive(Object message) throws Exception {
```

```

if (message instanceof String) {
    log.info("Received String message: {}", message);
    getSender().tell(message, getSelf());
} else
    unhandled(message);
}
}

```

An alternative to using `if-instanceof` checks is to use [Apache Commons MethodUtils](#) to invoke a named method whose parameter type matches the message type.

3.1.7 Reply to messages

If you want to have a handle for replying to a message, you can use `getSender()`, which gives you an `ActorRef`. You can reply by sending to that `ActorRef` with `getSender().tell(replyMsg, getSelf())`. You can also store the `ActorRef` for replying later, or passing on to other actors. If there is no sender (a message was sent without an actor or future context) then the sender defaults to a ‘dead-letter’ actor ref.

```

@Override
public void onReceive(Object msg) {
    Object result =
        // calculate result ...

    // do not forget the second argument!
    getSender().tell(result, getSelf());
}

```

3.1.8 Receive timeout

The `UntypedActorContext` `setReceiveTimeout` defines the inactivity timeout after which the sending of a `ReceiveTimeout` message is triggered. When specified, the receive function should be able to handle an `akka.actor.ReceiveTimeout` message. 1 millisecond is the minimum supported timeout.

Please note that the receive timeout might fire and enqueue the `ReceiveTimeout` message right after another message was enqueued; hence it is **not guaranteed** that upon reception of the receive timeout there must have been an idle period beforehand as configured via this method.

Once set, the receive timeout stays in effect (i.e. continues firing repeatedly after inactivity periods). Pass in `Duration.Undefined` to switch off this feature.

```

import akka.actor.ActorRef;
import akka.actor.ReceiveTimeout;
import akka.actor.UntypedActor;
import scala.concurrent.duration.Duration;

public class MyReceiveTimeoutUntypedActor extends UntypedActor {

    ActorRef target = getContext().system().deadLetters();

    public MyReceiveTimeoutUntypedActor() {
        // To set an initial delay
        getContext().setReceiveTimeout(Duration.create("30 seconds"));
    }

    public void onReceive(Object message) {
        if (message.equals("Hello")) {
            // To set in a response to a message
            getContext().setReceiveTimeout(Duration.create("1 second"));
            target = getSender();
            target.tell("Hello world", getSelf());
        }
    }
}

```

```

} else if (message instanceof ReceiveTimeout) {
    // To turn it off
    getContext().setReceiveTimeout(Duration.Undefined());
    target.tell("timeout", getSelf());
} else {
    unhandled(message);
}
}
}
}

```

3.1.9 Stopping actors

Actors are stopped by invoking the `stop` method of a `ActorRefFactory`, i.e. `ActorContext` or `ActorSystem`. Typically the context is used for stopping child actors and the system for stopping top level actors. The actual termination of the actor is performed asynchronously, i.e. `stop` may return before the actor is stopped.

Processing of the current message, if any, will continue before the actor is stopped, but additional messages in the mailbox will not be processed. By default these messages are sent to the `deadLetters` of the `ActorSystem`, but that depends on the mailbox implementation.

Termination of an actor proceeds in two steps: first the actor suspends its mailbox processing and sends a stop command to all its children, then it keeps processing the internal termination notifications from its children until the last one is gone, finally terminating itself (invoking `postStop`, dumping mailbox, publishing `Terminated` on the `DeathWatch`, telling its supervisor). This procedure ensures that actor system sub-trees terminate in an orderly fashion, propagating the stop command to the leaves and collecting their confirmation back to the stopped supervisor. If one of the actors does not respond (i.e. processing a message for extended periods of time and therefore not receiving the stop command), this whole process will be stuck.

Upon `ActorSystem.shutdown`, the system guardian actors will be stopped, and the aforementioned process will ensure proper termination of the whole system.

The `postStop` hook is invoked after an actor is fully stopped. This enables cleaning up of resources:

```

@Override
public void postStop() {
    // clean up resources here ...
}

```

Note: Since stopping an actor is asynchronous, you cannot immediately reuse the name of the child you just stopped; this will result in an `InvalidActorNameException`. Instead, watch the terminating actor and create its replacement in response to the `Terminated` message which will eventually arrive.

PoisonPill

You can also send an actor the `akka.actor.PoisonPill` message, which will stop the actor when the message is processed. `PoisonPill` is enqueued as ordinary messages and will be handled after messages that were already queued in the mailbox.

Use it like this:

```

myActor.tell(akka.actor.PoisonPill.getInstance(), sender);

```

Graceful Stop

`gracefulStop` is useful if you need to wait for termination or compose ordered termination of several actors:

```
import static akka.pattern.Patterns.gracefulStop;
import scala.concurrent.Await;
import scala.concurrent.Future;
import scala.concurrent.duration.Duration;
import akka.pattern.AskTimeoutException;

try {
  Future<Boolean> stopped =
    gracefulStop(actorRef, Duration.create(5, TimeUnit.SECONDS));
  Await.result(stopped, Duration.create(6, TimeUnit.SECONDS));
  // the actor has been stopped
} catch (AskTimeoutException e) {
  // the actor wasn't stopped within 5 seconds
}
```

When `gracefulStop()` returns successfully, the actor's `postStop()` hook will have been executed: there exists a happens-before edge between the end of `postStop()` and the return of `gracefulStop()`.

Warning: Keep in mind that an actor stopping and its name being deregistered are separate events which happen asynchronously from each other. Therefore it may be that you will find the name still in use after `gracefulStop()` returned. In order to guarantee proper deregistration, only reuse names from within a supervisor you control and only in response to a `Terminated` message, i.e. not for top-level actors.

3.1.10 HotSwap

Upgrade

Akka supports hotswapping the Actor's message loop (e.g. its implementation) at runtime. Use the `getContext().become` method from within the Actor. The hotswapped code is kept in a Stack which can be pushed (replacing or adding at the top) and popped.

Warning: Please note that the actor will revert to its original behavior when restarted by its Supervisor.

To hotswap the Actor using `getContext().become`:

```
import akka.japi.Procedure;

public class HotSwapActor extends UntypedActor {

  Procedure<Object> angry = new Procedure<Object>() {
    @Override
    public void apply(Object message) {
      if (message.equals("bar")) {
        getSender().tell("I am already angry?", getSelf());
      } else if (message.equals("foo")) {
        getContext().become(happy);
      }
    }
  };

  Procedure<Object> happy = new Procedure<Object>() {
    @Override
    public void apply(Object message) {
      if (message.equals("bar")) {
        getSender().tell("I am already happy :-)", getSelf());
      } else if (message.equals("foo")) {
        getContext().become(angry);
      }
    }
  }
}
```

```
};

public void onReceive(Object message) {
    if (message.equals("bar")) {
        getContext().become(angry);
    } else if (message.equals("foo")) {
        getContext().become(happy);
    } else {
        unhandled(message);
    }
}
}
```

This variant of the `become` method is useful for many different things, such as to implement a Finite State Machine (FSM). It will replace the current behavior (i.e. the top of the behavior stack), which means that you do not use `unbecome`, instead always the next behavior is explicitly installed.

The other way of using `become` does not replace but add to the top of the behavior stack. In this case care must be taken to ensure that the number of “pop” operations (i.e. `unbecome`) matches the number of “push” ones in the long run, otherwise this amounts to a memory leak (which is why this behavior is not the default).

```
public class UntypedActorSwapper {

    public static class Swap {
        public static Swap SWAP = new Swap();

        private Swap() {
        }
    }

    public static class Swapper extends UntypedActor {
        LoggingAdapter log = Logging.getLogger(getContext().system(), this);

        public void onReceive(Object message) {
            if (message == SWAP) {
                log.info("Hi");
                getContext().become(new Procedure<Object>() {
                    @Override
                    public void apply(Object message) {
                        log.info("Ho");
                        getContext().unbecome(); // resets the latest 'become'
                    }
                }, false); // this signals stacking of the new behavior
            } else {
                unhandled(message);
            }
        }
    }

    public static void main(String... args) {
        ActorSystem system = ActorSystem.create("MySystem");
        ActorRef swap = system.actorOf(Props.create(Swapper.class));
        swap.tell(SWAP, ActorRef.noSender()); // logs Hi
        swap.tell(SWAP, ActorRef.noSender()); // logs Ho
        swap.tell(SWAP, ActorRef.noSender()); // logs Hi
        swap.tell(SWAP, ActorRef.noSender()); // logs Ho
        swap.tell(SWAP, ActorRef.noSender()); // logs Hi
        swap.tell(SWAP, ActorRef.noSender()); // logs Ho
    }
}
```

3.1.11 Stash

The `UntypedActorWithStash` class enables an actor to temporarily stash away messages that can not or should not be handled using the actor's current behavior. Upon changing the actor's message handler, i.e., right before invoking `getContext().become()` or `getContext().unbecome()`, all stashed messages can be "unstashed", thereby prepending them to the actor's mailbox. This way, the stashed messages can be processed in the same order as they have been received originally. An actor that extends `UntypedActorWithStash` will automatically get a deque-based mailbox.

Note: The abstract class `UntypedActorWithStash` implements the marker interface `RequiresMessageQueue<DequeBasedMessageQueueSemantics>` which requests the system to automatically choose a deque based mailbox implementation for the actor. If you want more control over the mailbox, see the documentation on mailboxes: [Mailboxes](#).

Here is an example of the `UntypedActorWithStash` class in action:

```
import akka.actor.UntypedActorWithStash;

public class ActorWithProtocol extends UntypedActorWithStash {
  public void onReceive(Object msg) {
    if (msg.equals("open")) {
      unstashAll();
      getContext().become(new Procedure<Object>() {
        public void apply(Object msg) throws Exception {
          if (msg.equals("write")) {
            // do writing...
          } else if (msg.equals("close")) {
            unstashAll();
            getContext().unbecome();
          } else {
            stash();
          }
        }
      }, false); // add behavior on top instead of replacing
    } else {
      stash();
    }
  }
}
```

Invoking `stash()` adds the current message (the message that the actor received last) to the actor's stash. It is typically invoked when handling the default case in the actor's message handler to stash messages that aren't handled by the other cases. It is illegal to stash the same message twice; to do so results in an `IllegalStateException` being thrown. The stash may also be bounded in which case invoking `stash()` may lead to a capacity violation, which results in a `StashOverflowException`. The capacity of the stash can be configured using the `stash-capacity` setting (an `Int`) of the dispatcher's configuration.

Invoking `unstashAll()` enqueues messages from the stash to the actor's mailbox until the capacity of the mailbox (if any) has been reached (note that messages from the stash are prepended to the mailbox). In case a bounded mailbox overflows, a `MessageQueueAppendFailedException` is thrown. The stash is guaranteed to be empty after calling `unstashAll()`.

The stash is backed by a `scala.collection.immutable.Vector`. As a result, even a very large number of messages may be stashed without a major impact on performance.

Note that the stash is part of the ephemeral actor state, unlike the mailbox. Therefore, it should be managed like other parts of the actor's state which have the same property. The `Stash` trait's implementation of `preRestart` will call `unstashAll()`, which is usually the desired behavior.

Note: If you want to enforce that your actor can only work with an unbounded stash, then you should use the `UntypedActorWithUnboundedStash` class instead.

3.1.12 Killing an Actor

You can kill an actor by sending a `Kill` message. This will cause the actor to throw a `ActorKilledException`, triggering a failure. The actor will suspend operation and its supervisor will be asked how to handle the failure, which may mean resuming the actor, restarting it or terminating it completely. See *What Supervision Means* for more information.

Use `Kill` like this:

```
victim.tell(akka.actor.Kill.getInstance(), ActorRef.noSender());
```

3.1.13 Actors and exceptions

It can happen that while a message is being processed by an actor, that some kind of exception is thrown, e.g. a database exception.

What happens to the Message

If an exception is thrown while a message is being processed (i.e. taken out of its mailbox and handed over to the current behavior), then this message will be lost. It is important to understand that it is not put back on the mailbox. So if you want to retry processing of a message, you need to deal with it yourself by catching the exception and retry your flow. Make sure that you put a bound on the number of retries since you don't want a system to livelock (so consuming a lot of cpu cycles without making progress). Another possibility would be to have a look at the *PeekMailbox pattern*.

What happens to the mailbox

If an exception is thrown while a message is being processed, nothing happens to the mailbox. If the actor is restarted, the same mailbox will be there. So all messages on that mailbox will be there as well.

What happens to the actor

If code within an actor throws an exception, that actor is suspended and the supervision process is started (see *Supervision and Monitoring*). Depending on the supervisor's decision the actor is resumed (as if nothing happened), restarted (wiping out its internal state and starting from scratch) or terminated.

3.1.14 Initialization patterns

The rich lifecycle hooks of Actors provide a useful toolkit to implement various initialization patterns. During the lifetime of an `ActorRef`, an actor can potentially go through several restarts, where the old instance is replaced by a fresh one, invisibly to the outside observer who only sees the `ActorRef`.

One may think about the new instances as "incarnations". Initialization might be necessary for every incarnation of an actor, but sometimes one needs initialization to happen only at the birth of the first instance when the `ActorRef` is created. The following sections provide patterns for different initialization needs.

Initialization via constructor

Using the constructor for initialization has various benefits. First of all, it makes it possible to use `val` fields to store any state that does not change during the life of the actor instance, making the implementation of the actor more robust. The constructor is invoked for every incarnation of the actor, therefore the internals of the actor can always assume that proper initialization happened. This is also the drawback of this approach, as there are cases when one would like to avoid reinitializing internals on restart. For example, it is often useful to preserve child actors across restarts. The following section provides a pattern for this case.

Initialization via preStart

The method `preStart()` of an actor is only called once directly during the initialization of the first instance, that is, at creation of its `ActorRef`. In the case of restarts, `preStart()` is called from `postRestart()`, therefore if not overridden, `preStart()` is called on every incarnation. However, overriding `postRestart()` one can disable this behavior, and ensure that there is only one call to `preStart()`.

One useful usage of this pattern is to disable creation of new `ActorRefs` for children during restarts. This can be achieved by overriding `preRestart()`:

```
@Override
public void preStart() {
    // Initialize children here
}

// Overriding postRestart to disable the call to preStart()
// after restarts
@Override
public void postRestart(Throwable reason) {
}

// The default implementation of preRestart() stops all the children
// of the actor. To opt-out from stopping the children, we
// have to override preRestart()
@Override
public void preRestart(Throwable reason, Option<Object> message)
    throws Exception {
    // Keep the call to postStop(), but no stopping of children
    postStop();
}
```

Please note, that the child actors are *still restarted*, but no new `ActorRef` is created. One can recursively apply the same principles for the children, ensuring that their `preStart()` method is called only at the creation of their refs.

For more information see [What Restarting Means](#).

Initialization via message passing

There are cases when it is impossible to pass all the information needed for actor initialization in the constructor, for example in the presence of circular dependencies. In this case the actor should listen for an initialization message, and use `become()` or a finite state-machine state transition to encode the initialized and uninitialized states of the actor.

```
private String initializeMe = null;

@Override
public void onReceive(Object message) throws Exception {
    if (message.equals("init")) {
        initializeMe = "Up and running";
        getContext().become(new Procedure<Object>() {
            @Override
            public void apply(Object message) throws Exception {
                if (message.equals("U OK?"))
                    getSender().tell(initializeMe, getSelf());
            }
        });
    }
}
```

If the actor may receive messages before it has been initialized, a useful tool can be the `Stash` to save messages until the initialization finishes, and replaying them after the actor became initialized.

Warning: This pattern should be used with care, and applied only when none of the patterns above are applicable. One of the potential issues is that messages might be lost when sent to remote actors. Also, publishing an `ActorRef` in an uninitialized state might lead to the condition that it receives a user message before the initialization has been done.

3.2 Typed Actors

Akka Typed Actors is an implementation of the [Active Objects](#) pattern. Essentially turning method invocations into asynchronous dispatch instead of synchronous that has been the default way since Smalltalk came out.

Typed Actors consist of 2 “parts”, a public interface and an implementation, and if you’ve done any work in “enterprise” Java, this will be very familiar to you. As with normal Actors you have an external API (the public interface instance) that will delegate methodcalls asynchronously to a private instance of the implementation.

The advantage of Typed Actors vs. Actors is that with TypedActors you have a static contract, and don’t need to define your own messages, the downside is that it places some limitations on what you can do and what you can’t, i.e. you can’t use `become/unbecome`.

Typed Actors are implemented using [JDK Proxies](#) which provide a pretty easy-worked API to intercept method calls.

Note: Just as with regular Akka Untyped Actors, Typed Actors process one call at a time.

3.2.1 When to use Typed Actors

Typed actors are nice for bridging between actor systems (the “inside”) and non-actor code (the “outside”), because they allow you to write normal OO-looking code on the outside. Think of them like doors: their practicality lies in interfacing between private sphere and the public, but you don’t want that many doors inside your house, do you? For a longer discussion see [this blog post](#).

A bit more background: TypedActors can very easily be abused as RPC, and that is an abstraction which is [well-known](#) to be leaky. Hence TypedActors are not what we think of first when we talk about making highly scalable concurrent software easier to write correctly. They have their niche, use them sparingly.

3.2.2 The tools of the trade

Before we create our first Typed Actor we should first go through the tools that we have at our disposal, it’s located in `akka.actor.TypedActor`.

```
//Returns the Typed Actor Extension
TypedActorExtension extension =
    TypedActor.get(system); //system is an instance of ActorSystem

//Returns whether the reference is a Typed Actor Proxy or not
TypedActor.get(system).isTypedActor(someReference);

//Returns the backing Akka Actor behind an external Typed Actor Proxy
TypedActor.get(system).getActorRefFor(someReference);

//Returns the current ActorContext,
// method only valid within methods of a TypedActor implementation
ActorContext context = TypedActor.context();

//Returns the external proxy of the current Typed Actor,
// method only valid within methods of a TypedActor implementation
Squarer sq = TypedActor.<Squarer>self();
```

```
//Returns a contextual instance of the Typed Actor Extension
//this means that if you create other Typed Actors with this,
//they will become children to the current Typed Actor.
TypedActor.get(TypedActor.context());
```

Warning: Same as not exposing `this` of an Akka Actor, it's important not to expose `this` of a Typed Actor, instead you should pass the external proxy reference, which is obtained from within your Typed Actor as `TypedActor.self()`, this is your external identity, as the `ActorRef` is the external identity of an Akka Actor.

3.2.3 Creating Typed Actors

To create a Typed Actor you need to have one or more interfaces, and one implementation.

The following imports are assumed:

```
import akka.actor.TypedActor;
import akka.actor.*;
import akka.japi.*;
import akka.dispatch.Futures;
import scala.concurrent.Await;
import scala.concurrent.Future;
import scala.concurrent.duration.Duration;
import java.util.concurrent.TimeUnit;
```

Our example interface:

```
public interface Squarer {
    // typed actor iface methods ...
}
```

Our example implementation of that interface:

```
class SquarerImpl implements Squarer {
    private String name;

    public SquarerImpl() {
        this.name = "default";
    }

    public SquarerImpl(String name) {
        this.name = name;
    }

    // typed actor impl methods ...
}
```

The most trivial way of creating a Typed Actor instance of our Squarer:

```
Squarer mySquarer =
    TypedActor.get(system).typedActorOf(
        new TypedProps<SquarerImpl>(Squarer.class, SquarerImpl.class));
```

First type is the type of the proxy, the second type is the type of the implementation. If you need to call a specific constructor you do it like this:

```
Squarer otherSquarer =
    TypedActor.get(system).typedActorOf(
        new TypedProps<SquarerImpl>(Squarer.class,
            new Creator<SquarerImpl>() {
                public SquarerImpl create() { return new SquarerImpl("foo"); }
            }
        ));
```

```
    }),
    "name");
```

Since you supply a `Props`, you can specify which dispatcher to use, what the default timeout should be used and more. Now, our `Squarer` doesn't have any methods, so we'd better add those.

```
public interface Squarer {
    void squareDontCare(int i); //fire-forget

    Future<Integer> square(int i); //non-blocking send-request-reply

    Option<Integer> squareNowPlease(int i); //blocking send-request-reply

    int squareNow(int i); //blocking send-request-reply
}
```

Alright, now we've got some methods we can call, but we need to implement those in `SquarerImpl`.

```
class SquarerImpl implements Squarer {
    private String name;

    public SquarerImpl() {
        this.name = "default";
    }

    public SquarerImpl(String name) {
        this.name = name;
    }

    public void squareDontCare(int i) {
        int sq = i * i; //Nobody cares :(
    }

    public Future<Integer> square(int i) {
        return Futures.successful(i * i);
    }

    public Option<Integer> squareNowPlease(int i) {
        return Option.some(i * i);
    }

    public int squareNow(int i) {
        return i * i;
    }
}
```

Excellent, now we have an interface and an implementation of that interface, and we know how to create a Typed Actor from that, so let's look at calling these methods.

3.2.4 Method dispatch semantics

Methods returning:

- `void` will be dispatched with `fire-and-forget` semantics, exactly like `ActorRef.tell`
- `scala.concurrent.Future<?>` will use `send-request-reply` semantics, exactly like `ActorRef.ask`
- `scala.Option<?>` or `akka.japi.Option<?>` will use `send-request-reply` semantics, but *will* block to wait for an answer, and return `None` if no answer was produced within the timeout, or `scala.Some/akka.japi.Some` containing the result otherwise. Any exception that was thrown during this call will be rethrown.

- Any other type of value will use `send-request-reply` semantics, but *will* block to wait for an answer, throwing `java.util.concurrent.TimeoutException` if there was a timeout or rethrow any exception that was thrown during this call.

3.2.5 Messages and immutability

While Akka cannot enforce that the parameters to the methods of your Typed Actors are immutable, we *strongly* recommend that parameters passed are immutable.

One-way message send

```
mySquarer.squareDontCare(10);
```

As simple as that! The method will be executed on another thread; asynchronously.

Request-reply message send

```
Option<Integer> oSquare = mySquarer.squareNowPlease(10); //Option[Int]
```

This will block for as long as the timeout that was set in the `Props` of the Typed Actor, if needed. It will return `None` if a timeout occurs.

```
int iSquare = mySquarer.squareNow(10); //Int
```

This will block for as long as the timeout that was set in the `Props` of the Typed Actor, if needed. It will throw a `java.util.concurrent.TimeoutException` if a timeout occurs.

Request-reply-with-future message send

```
Future<Integer> fSquare = mySquarer.square(10); //A Future[Int]
```

This call is asynchronous, and the `Future` returned can be used for asynchronous composition.

3.2.6 Stopping Typed Actors

Since Akka's Typed Actors are backed by Akka Actors they must be stopped when they aren't needed anymore.

```
TypedActor.get(system).stop(mySquarer);
```

This asynchronously stops the Typed Actor associated with the specified proxy ASAP.

```
TypedActor.get(system).poisonPill(otherSquarer);
```

This asynchronously stops the Typed Actor associated with the specified proxy after it's done with all calls that were made prior to this call.

3.2.7 Typed Actor Hierarchies

Since you can obtain a contextual Typed Actor Extension by passing in an `ActorContext` you can create child Typed Actors by invoking `typedActorOf(...)` on that.

```
Squarer childSquarer =
  TypedActor.get(TypedActor.context()).
    typedActorOf(
      new TypedProps<SquarerImpl>(Squarer.class, SquarerImpl.class)
    );
//Use "childSquarer" as a Squarer
```

You can also create a child Typed Actor in regular Akka Actors by giving the `UntypedActorContext` as an input parameter to `TypedActor.get(...)`.

3.2.8 Supervisor Strategy

By having your Typed Actor implementation class implement `TypedActor.Supervisor` you can define the strategy to use for supervising child actors, as described in *Supervision and Monitoring* and *Fault Tolerance*.

3.2.9 Receive arbitrary messages

If your implementation class of your TypedActor extends `akka.actor.TypedActor.Receiver`, all messages that are not `MethodCall`'s will be passed into the `onReceive`-method.

This allows you to react to `DeathWatch Terminated`-messages and other types of messages, e.g. when interfacing with untyped actors.

3.2.10 Lifecycle callbacks

By having your Typed Actor implementation class implement any and all of the following:

- `TypedActor.PreStart`
- `TypedActor.PostStop`
- `TypedActor.PreRestart`
- `TypedActor.PostRestart`

You can hook into the lifecycle of your Typed Actor.

3.2.11 Proxying

You can use the `typedActorOf` that takes a `TypedProps` and an `ActorRef` to proxy the given `ActorRef` as a TypedActor. This is usable if you want to communicate remotely with TypedActors on other machines, just pass the `ActorRef` to `typedActorOf`.

3.2.12 Lookup & Remoting

Since TypedActors are backed by Akka Actors, you can use `typedActorOf` to proxy ActorRefs potentially residing on remote nodes.

```
Squarer typedActor =
  TypedActor.get(system).
    typedActorOf(
      new TypedProps<Squarer>(Squarer.class),
      actorRefToRemoteActor
    );
//Use "typedActor" as a FooBar
```

3.3 Fault Tolerance


As explained in *Actor Systems* each actor is the supervisor of its children, and as such each actor defines fault handling supervisor strategy. This strategy cannot be changed afterwards as it is an integral part of the actor system's structure.

3.3.1 Fault Handling in Practice

First, let us look at a sample that illustrates one way to handle data store errors, which is a typical source of failure in real world applications. Of course it depends on the actual application what is possible to do when the data store is unavailable, but in this sample we use a best effort re-connect approach.

Read the following source code. The inlined comments explain the different pieces of the fault handling and why they are added. It is also highly recommended to run this sample as it is easy to follow the log output to understand what is happening in runtime.


Diagrams of the Fault Tolerance Sample

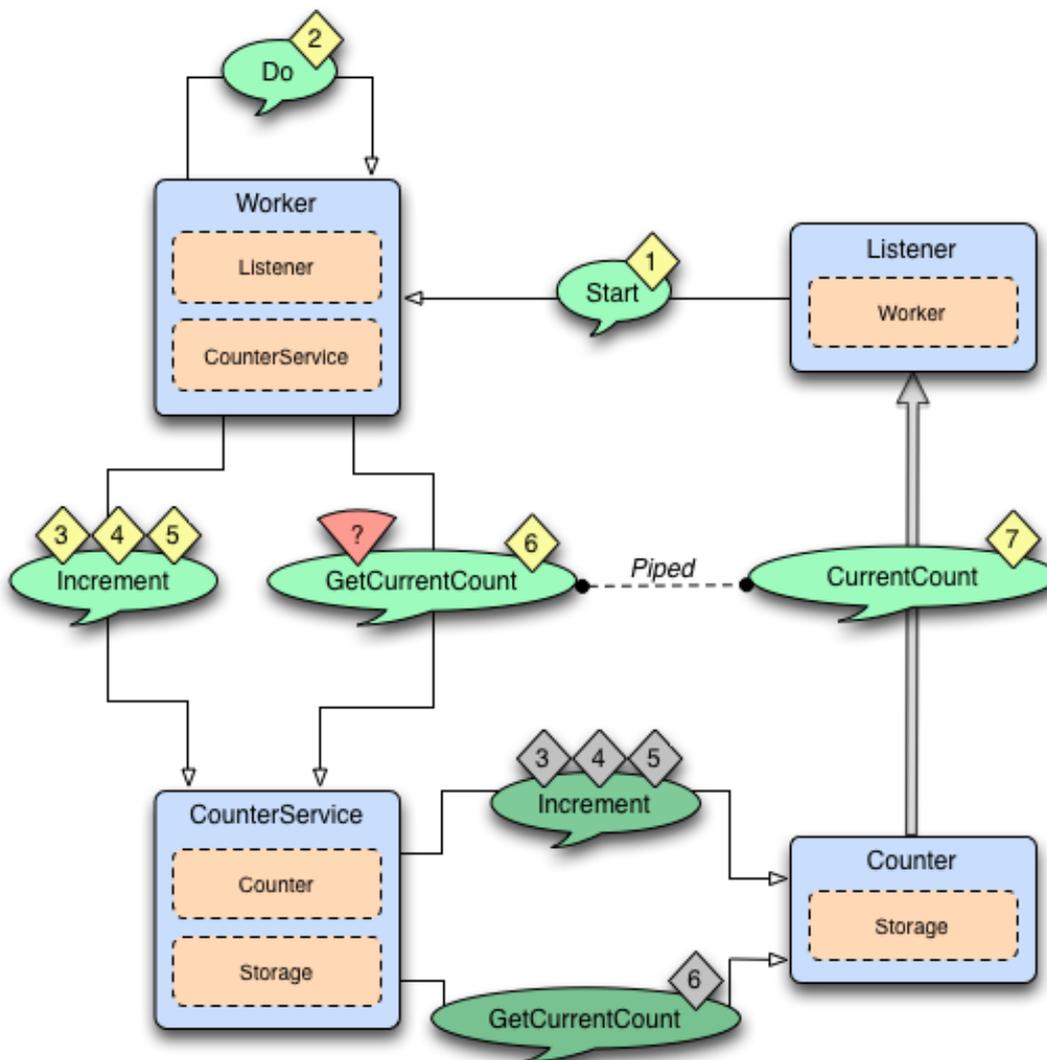

The above diagram illustrates the normal message flow.

Normal flow:

Step	Description
1	The progress Listener starts the work.
2	The Worker schedules work by sending Do messages periodically to itself
3,	When receiving Do the Worker tells the CounterService to increment the counter, three times.
4, 5	The Increment message is forwarded to the Counter, which updates its counter variable and sends current value to the Storage.
6, 7	The Worker asks the CounterService of current value of the counter and pipes the result back to the Listener.

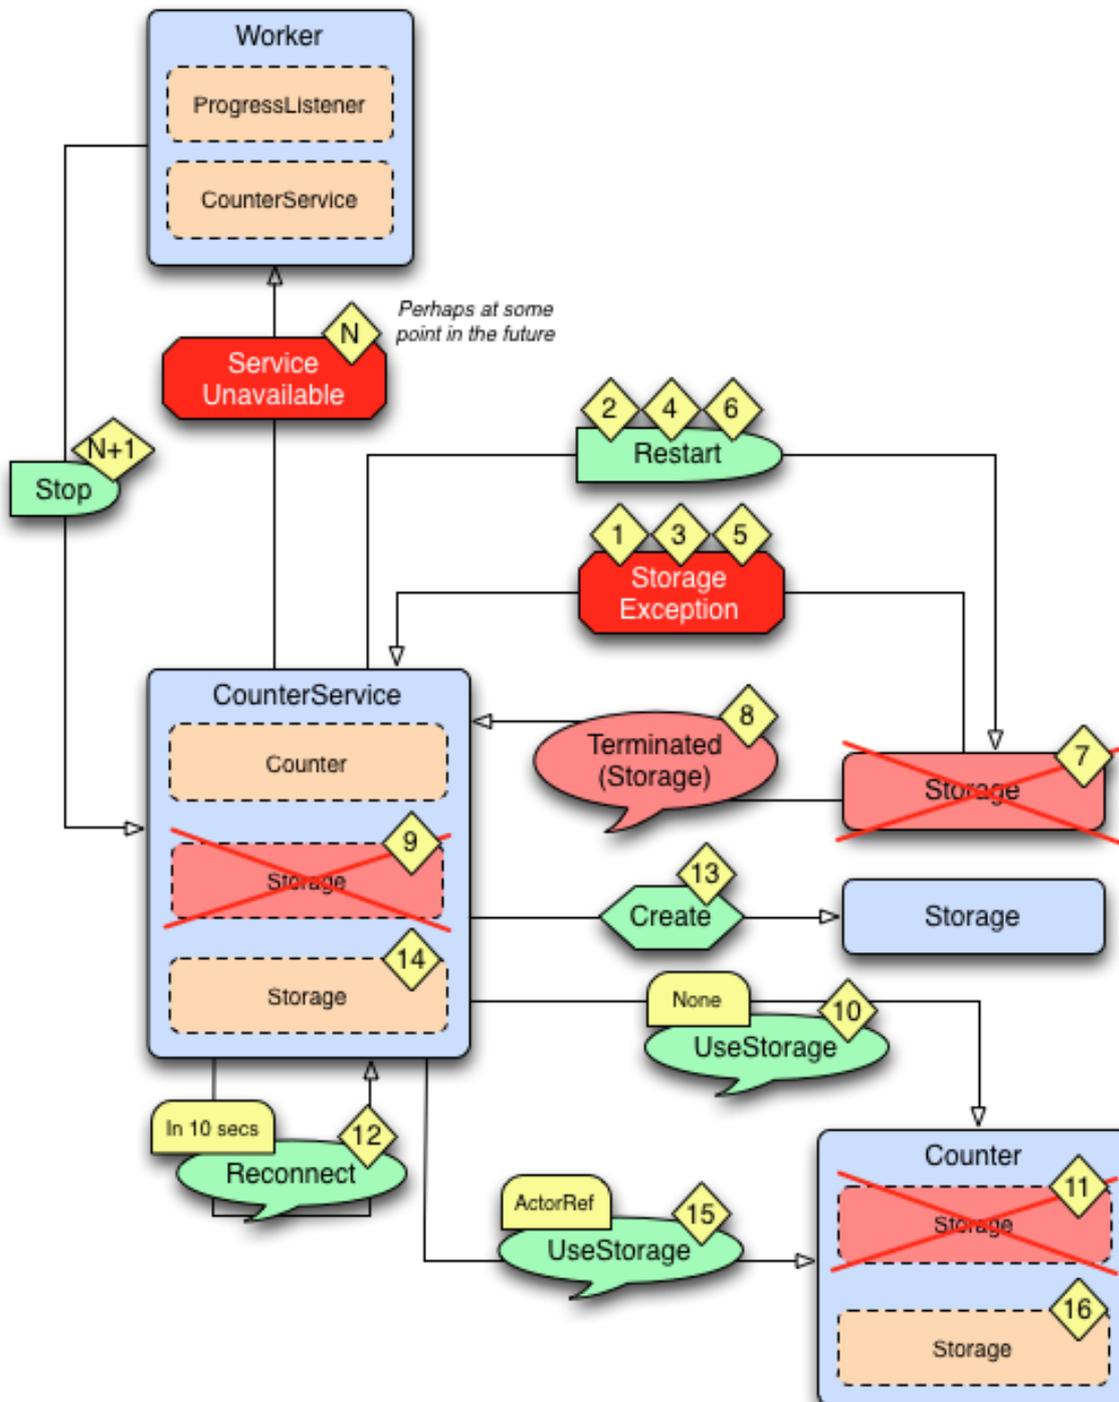

The above diagram illustrates what happens in case of storage failure.

Failure flow:

Step	Description
1	The Storage throws StorageException.
2	The CounterService is supervisor of the Storage and restarts the Storage when StorageException is thrown.
3, 4, 5, 6	The Storage continues to fail and is restarted.
7	After 3 failures and restarts within 5 seconds the Storage is stopped by its supervisor, i.e. the CounterService.
8	The CounterService is also watching the Storage for termination and receives the Terminated message when the Storage has been stopped ...
9, 10, 11	and tells the Counter that there is no Storage.
12	The CounterService schedules a Reconnect message to itself.
13, 14	When it receives the Reconnect message it creates a new Storage ...
15, 16	and tells the Counter to use the new Storage

Full Source Code of the Fault Tolerance Sample

```
import java.util.ArrayList;
import java.util.HashMap;
import java.util.List;
import java.util.Map;

import akka.actor.*;
import akka.dispatch.Mapper;
import akka.japi.Function;
import scala.concurrent.duration.Duration;
import akka.util.Timeout;
import akka.event.Logging;
import akka.event.LoggingAdapter;
import com.typesafe.config.Config;
import com.typesafe.config.ConfigFactory;

import static akka.japi.Util.classTag;

import static akka.actor.SupervisorStrategy.resume;
import static akka.actor.SupervisorStrategy.restart;
import static akka.actor.SupervisorStrategy.stop;
import static akka.actor.SupervisorStrategy.escalate;
import akka.actor.SupervisorStrategy.Directive;
import static akka.pattern.Patterns.ask;
import static akka.pattern.Patterns.pipe;

import static docs.actor.japi.FaultHandlingDocSample.WorkerApi.*;
import static docs.actor.japi.FaultHandlingDocSample.CounterServiceApi.*;
import static docs.actor.japi.FaultHandlingDocSample.CounterApi.*;
import static docs.actor.japi.FaultHandlingDocSample.StorageApi.*;

public class FaultHandlingDocSample {

    /**
     * Runs the sample
     */
    public static void main(String[] args) {
        Config config = ConfigFactory.parseString("akka.loglevel = DEBUG \n" +
            "akka.actor.debug.lifecycle = on");
```

```

ActorSystem system = ActorSystem.create("FaultToleranceSample", config);
ActorRef worker = system.actorOf(Props.create(Worker.class), "worker");
ActorRef listener = system.actorOf(Props.create(Listener.class), "listener");
// start the work and listen on progress
// note that the listener is used as sender of the tell,
// i.e. it will receive replies from the worker
worker.tell(Start, listener);
}

/**
 * Listens on progress from the worker and shuts down the system when enough
 * work has been done.
 */
public static class Listener extends UntypedActor {
    final LoggingAdapter log = Logging.getLogger(getContext().system(), this);

    @Override
    public void preStart() {
        // If we don't get any progress within 15 seconds then the service
        // is unavailable
        getContext().setReceiveTimeout(Duration.create("15 seconds"));
    }

    public void onReceive(Object msg) {
        log.debug("received message {}", msg);
        if (msg instanceof Progress) {
            Progress progress = (Progress) msg;
            log.info("Current progress: {} %", progress.percent);
            if (progress.percent >= 100.0) {
                log.info("That's all, shutting down");
                getContext().system().shutdown();
            }
        } else if (msg == ReceiveTimeout.getInstance()) {
            // No progress within 15 seconds, ServiceUnavailable
            log.error("Shutting down due to unavailable service");
            getContext().system().shutdown();
        } else {
            unhandled(msg);
        }
    }
}

public interface WorkerApi {
    public static final Object Start = "Start";
    public static final Object Do = "Do";

    public static class Progress {
        public final double percent;

        public Progress(double percent) {
            this.percent = percent;
        }

        public String toString() {
            return String.format("%s(%s)", getClass().getSimpleName(), percent);
        }
    }
}

/**
 * Worker performs some work when it receives the Start message. It will
 * continuously notify the sender of the Start message of current Progress.

```

```

* The Worker supervise the CounterService.
*/
public static class Worker extends UntypedActor {
    final LoggingAdapter log = Logging.getLogger(getContext().system(), this);
    final Timeout askTimeout = new Timeout(Duration.create(5, "seconds"));

    // The sender of the initial Start message will continuously be notified
    // about progress
    ActorRef progressListener;
    final ActorRef counterService = getContext().actorOf(
        Props.create(CounterService.class), "counter");
    final int totalCount = 51;

    // Stop the CounterService child if it throws ServiceUnavailable
    private static SupervisorStrategy strategy = new OneForOneStrategy(-1,
        Duration.Inf(), new Function<Throwable, Directive>() {
            @Override
            public Directive apply(Throwable t) {
                if (t instanceof ServiceUnavailable) {
                    return stop();
                } else {
                    return escalate();
                }
            }
        });

    @Override
    public SupervisorStrategy supervisorStrategy() {
        return strategy;
    }

    public void onReceive(Object msg) {
        log.debug("received message {}", msg);
        if (msg.equals(Start) && progressListener == null) {
            progressListener = getSender();
            getContext().system().scheduler().schedule(
                Duration.Zero(), Duration.create(1, "second"), getSelf(), Do,
                getContext().dispatcher(), null
            );
        } else if (msg.equals(Do)) {
            counterService.tell(new Increment(1), getSelf());
            counterService.tell(new Increment(1), getSelf());
            counterService.tell(new Increment(1), getSelf());

            // Send current progress to the initial sender
            pipe(ask(counterService, GetCurrentCount, askTimeout)
                .mapTo(classTag(CurrentCount.class))
                .map(new Mapper<CurrentCount, Progress>() {
                    public Progress apply(CurrentCount c) {
                        return new Progress(100.0 * c.count / totalCount);
                    }
                }, getContext().dispatcher(), getContext().dispatcher())
                .to(progressListener);
        } else {
            unhandled(msg);
        }
    }
}

public interface CounterServiceApi {

    public static final Object GetCurrentCount = "GetCurrentCount";

```

```

public static class CurrentCount {
    public final String key;
    public final long count;

    public CurrentCount(String key, long count) {
        this.key = key;
        this.count = count;
    }

    public String toString() {
        return String.format("%s(%s, %s)", getClass().getSimpleName(), key, count);
    }
}

public static class Increment {
    public final long n;

    public Increment(long n) {
        this.n = n;
    }

    public String toString() {
        return String.format("%s(%s)", getClass().getSimpleName(), n);
    }
}

public static class ServiceUnavailable extends RuntimeException {
    private static final long serialVersionUID = 1L;
    public ServiceUnavailable(String msg) {
        super(msg);
    }
}

}

/**
 * Adds the value received in Increment message to a persistent counter.
 * Replies with CurrentCount when it is asked for CurrentCount. CounterService
 * supervise Storage and Counter.
 */
public static class CounterService extends UntypedActor {

    // Reconnect message
    static final Object Reconnect = "Reconnect";

    private static class SenderMsgPair {
        final ActorRef sender;
        final Object msg;

        SenderMsgPair(ActorRef sender, Object msg) {
            this.msg = msg;
            this.sender = sender;
        }
    }

    final LoggingAdapter log = Logging.getLogger(getContext().system(), this);
    final String key = getSelf().path().name();
    ActorRef storage;
    ActorRef counter;
    final List<SenderMsgPair> backlog = new ArrayList<SenderMsgPair>();
    final int MAX_BACKLOG = 10000;
}

```

```

// Restart the storage child when StorageException is thrown.
// After 3 restarts within 5 seconds it will be stopped.
private static SupervisorStrategy strategy = new OneForOneStrategy(3,
    Duration.create("5 seconds"), new Function<Throwable, Directive>() {
    @Override
    public Directive apply(Throwable t) {
        if (t instanceof StorageException) {
            return restart();
        } else {
            return escalate();
        }
    }
});

@Override
public SupervisorStrategy supervisorStrategy() {
    return strategy;
}

@Override
public void preStart() {
    initStorage();
}

/**
 * The child storage is restarted in case of failure, but after 3 restarts,
 * and still failing it will be stopped. Better to back-off than
 * continuously failing. When it has been stopped we will schedule a
 * Reconnect after a delay. Watch the child so we receive Terminated message
 * when it has been terminated.
 */
void initStorage() {
    storage = getContext().watch(getContext().actorOf(
        Props.create(Storage.class), "storage"));
    // Tell the counter, if any, to use the new storage
    if (counter != null)
        counter.tell(new UseStorage(storage), getSelf());
    // We need the initial value to be able to operate
    storage.tell(new Get(key), getSelf());
}

@Override
public void onReceive(Object msg) {
    log.debug("received message {}", msg);
    if (msg instanceof Entry && ((Entry) msg).key.equals(key) &&
        counter == null) {
        // Reply from Storage of the initial value, now we can create the Counter
        final long value = ((Entry) msg).value;
        counter = getContext().actorOf(Props.create(Counter.class, key, value));
        // Tell the counter to use current storage
        counter.tell(new UseStorage(storage), getSelf());
        // and send the buffered backlog to the counter
        for (SenderMsgPair each : backlog) {
            counter.tell(each.msg, each.sender);
        }
        backlog.clear();
    } else if (msg instanceof Increment) {
        forwardOrPlaceInBacklog(msg);
    } else if (msg.equals(GetCurrentCount)) {
        forwardOrPlaceInBacklog(msg);
    } else if (msg instanceof Terminated) {
        // After 3 restarts the storage child is stopped.
        // We receive Terminated because we watch the child, see initStorage.
    }
}

```

```

storage = null;
// Tell the counter that there is no storage for the moment
counter.tell(new UseStorage(null), getSelf());
// Try to re-establish storage after while
getContext().system().scheduler().scheduleOnce(
    Duration.create(10, "seconds"), getSelf(), Reconnect,
    getContext().dispatcher(), null);
} else if (msg.equals(Reconnect)) {
    // Re-establish storage after the scheduled delay
    initStorage();
} else {
    unhandled(msg);
}
}

void forwardOrPlaceInBacklog(Object msg) {
    // We need the initial value from storage before we can start delegate to
    // the counter. Before that we place the messages in a backlog, to be sent
    // to the counter when it is initialized.
    if (counter == null) {
        if (backlog.size() >= MAX_BACKLOG)
            throw new ServiceUnavailable("CounterService not available," +
                " lack of initial value");
        backlog.add(new SenderMsgPair(getSender(), msg));
    } else {
        counter.forward(msg, getContext());
    }
}

public interface CounterApi {
    public static class UseStorage {
        public final ActorRef storage;

        public UseStorage(ActorRef storage) {
            this.storage = storage;
        }

        public String toString() {
            return String.format("%s(%s)", getClass().getSimpleName(), storage);
        }
    }
}

/**
 * The in memory count variable that will send current value to the Storage,
 * if there is any storage available at the moment.
 */
public static class Counter extends UntypedActor {
    final LoggingAdapter log = Logging.getLogger(getContext().system(), this);
    final String key;
    long count;
    ActorRef storage;

    public Counter(String key, long initialValue) {
        this.key = key;
        this.count = initialValue;
    }

    @Override
    public void onReceive(Object msg) {
        log.debug("received message {}", msg);
    }
}

```

```

if (msg instanceof UseStorage) {
    storage = ((UseStorage) msg).storage;
    storeCount();
} else if (msg instanceof Increment) {
    count += ((Increment) msg).n;
    storeCount();
} else if (msg.equals(GetCurrentCount)) {
    getSender().tell(new CurrentCount(key, count), getSelf());
} else {
    unhandled(msg);
}
}

void storeCount() {
    // Delegate dangerous work, to protect our valuable state.
    // We can continue without storage.
    if (storage != null) {
        storage.tell(new Store(new Entry(key, count)), getSelf());
    }
}
}

public interface StorageApi {

    public static class Store {
        public final Entry entry;

        public Store(Entry entry) {
            this.entry = entry;
        }

        public String toString() {
            return String.format("%s(%s)", getClass().getSimpleName(), entry);
        }
    }

    public static class Entry {
        public final String key;
        public final long value;

        public Entry(String key, long value) {
            this.key = key;
            this.value = value;
        }

        public String toString() {
            return String.format("%s(%s, %s)", getClass().getSimpleName(), key, value);
        }
    }

    public static class Get {
        public final String key;

        public Get(String key) {
            this.key = key;
        }

        public String toString() {
            return String.format("%s(%s)", getClass().getSimpleName(), key);
        }
    }

    public static class StorageException extends RuntimeException {

```

```

private static final long serialVersionUID = 1L;
public StorageException(String msg) {
    super(msg);
}
}
}

/**
 * Saves key/value pairs to persistent storage when receiving Store message.
 * Replies with current value when receiving Get message. Will throw
 * StorageException if the underlying data store is out of order.
 */
public static class Storage extends UntypedActor {

    final LoggingAdapter log = Logging.getLogger(getContext().system(), this);
    final DummyDB db = DummyDB.instance;

    @Override
    public void onReceive(Object msg) {
        log.debug("received message {}", msg);
        if (msg instanceof Store) {
            Store store = (Store) msg;
            db.save(store.entry.key, store.entry.value);
        } else if (msg instanceof Get) {
            Get get = (Get) msg;
            Long value = db.load(get.key);
            getSender().tell(new Entry(get.key, value == null ?
                Long.valueOf(0L) : value), getSelf());
        } else {
            unhandled(msg);
        }
    }
}

public static class DummyDB {
    public static final DummyDB instance = new DummyDB();
    private final Map<String, Long> db = new HashMap<String, Long>();

    private DummyDB() {
    }

    public synchronized void save(String key, Long value) throws StorageException {
        if (11 <= value && value <= 14)
            throw new StorageException("Simulated store failure " + value);
        db.put(key, value);
    }

    public synchronized Long load(String key) throws StorageException {
        return db.get(key);
    }
}
}
}

```

Note: If the strategy is declared inside the supervising actor (as opposed to as a static property or class) its decider has access to all internal state of the actor in a thread-safe fashion, including obtaining a reference to the currently failed child (available as the `getSender()` of the failure message).

3.3.2 Creating a Supervisor Strategy

The following sections explain the fault handling mechanism and alternatives in more depth.

For the sake of demonstration let us consider the following strategy:

```
private static SupervisorStrategy strategy =
    new OneForOneStrategy(10, Duration.create("1 minute"),
        new Function<Throwable, Directive>() {
            @Override
            public Directive apply(Throwable t) {
                if (t instanceof ArithmeticException) {
                    return resume();
                } else if (t instanceof NullPointerException) {
                    return restart();
                } else if (t instanceof IllegalArgumentException) {
                    return stop();
                } else {
                    return escalate();
                }
            }
        });

@Override
public SupervisorStrategy supervisorStrategy() {
    return strategy;
}
```

I have chosen a few well-known exception types in order to demonstrate the application of the fault handling directives described in *Supervision and Monitoring*. First off, it is a one-for-one strategy, meaning that each child is treated separately (an all-for-one strategy works very similarly, the only difference is that any decision is applied to all children of the supervisor, not only the failing one). There are limits set on the restart frequency, namely maximum 10 restarts per minute. `-1` and `Duration.Inf()` means that the respective limit does not apply, leaving the possibility to specify an absolute upper limit on the restarts or to make the restarts work infinitely.

Note: If the strategy is declared inside the supervising actor (as opposed to a separate class) its decider has access to all internal state of the actor in a thread-safe fashion, including obtaining a reference to the currently failed child (available as the `getSender` of the failure message).

Default Supervisor Strategy

`Escalate` is used if the defined strategy doesn't cover the exception that was thrown.

When the supervisor strategy is not defined for an actor the following exceptions are handled by default:

- `ActorInitializationException` will stop the failing child actor
- `ActorKilledException` will stop the failing child actor
- `Exception` will restart the failing child actor
- Other types of `Throwable` will be escalated to parent actor

If the exception escalate all the way up to the root guardian it will handle it in the same way as the default strategy defined above.

Stopping Supervisor Strategy

Closer to the Erlang way is the strategy to just stop children when they fail and then take corrective action in the supervisor when `DeathWatch` signals the loss of the child. This strategy is also provided pre-packaged as `SupervisorStrategy.stoppingStrategy` with an accompanying `StoppingSupervisorStrategy` configurator to be used when you want the `"/user"` guardian to apply it.

Logging of Actor Failures

By default the `SupervisorStrategy` logs failures unless they are escalated. Escalated failures are supposed to be handled, and potentially logged, at a level higher in the hierarchy.

You can mute the default logging of a `SupervisorStrategy` by setting `loggingEnabled` to `false` when instantiating it. Customized logging can be done inside the `Decider`. Note that the reference to the currently failed child is available as the `getSender` when the `SupervisorStrategy` is declared inside the supervising actor.

You may also customize the logging in your own `SupervisorStrategy` implementation by overriding the `logFailure` method.

3.3.3 Supervision of Top-Level Actors

Toplevel actors means those which are created using `system.actorOf()`, and they are children of the *User Guardian*. There are no special rules applied in this case, the guardian simply applies the configured strategy.

3.3.4 Test Application

The following section shows the effects of the different directives in practice, wherefor a test setup is needed. First off, we need a suitable supervisor:

```
public class Supervisor extends UntypedActor {

    private static SupervisorStrategy strategy =
        new OneForOneStrategy(10, Duration.create("1 minute"),
            new Function<Throwable, Directive>() {
                @Override
                public Directive apply(Throwable t) {
                    if (t instanceof ArithmeticException) {
                        return resume();
                    } else if (t instanceof NullPointerException) {
                        return restart();
                    } else if (t instanceof IllegalArgumentException) {
                        return stop();
                    } else {
                        return escalate();
                    }
                }
            });

    @Override
    public SupervisorStrategy supervisorStrategy() {
        return strategy;
    }

    public void onReceive(Object o) {
        if (o instanceof Props) {
            getSender().tell(getContext().actorOf((Props) o), getSelf());
        } else {
            unhandled(o);
        }
    }
}
```

This supervisor will be used to create a child, with which we can experiment:

```
public class Child extends UntypedActor {
    int state = 0;
```

```

public void onReceive(Object o) throws Exception {
    if (o instanceof Exception) {
        throw (Exception) o;
    } else if (o instanceof Integer) {
        state = (Integer) o;
    } else if (o.equals("get")) {
        getSender().tell(state, getSelf());
    } else {
        unhandled(o);
    }
}
}
}

```

The test is easier by using the utilities described in *akka-testkit*, where `TestProbe` provides an actor ref useful for receiving and inspecting replies.

```

import akka.actor.ActorRef;
import akka.actor.ActorSystem;
import akka.actor.SupervisorStrategy;
import static akka.actor.SupervisorStrategy.resume;
import static akka.actor.SupervisorStrategy.restart;
import static akka.actor.SupervisorStrategy.stop;
import static akka.actor.SupervisorStrategy.escalate;
import akka.actor.SupervisorStrategy.Directive;
import akka.actor.OneForOneStrategy;
import akka.actor.Props;
import akka.actor.Terminated;
import akka.actor.UntypedActor;
import scala.concurrent.Await;
import static akka.pattern.Patterns.ask;
import scala.concurrent.duration.Duration;
import akka.testkit.AkkaSpec;
import akka.testkit.TestProbe;

public class FaultHandlingTest {
    static ActorSystem system;
    Duration timeout = Duration.create(5, SECONDS);

    @BeforeClass
    public static void start() {
        system = ActorSystem.create("test", AkkaSpec.testConf());
    }

    @AfterClass
    public static void cleanup() {
        JavaTestKit.shutdownActorSystem(system);
        system = null;
    }

    @Test
    public void mustEmploySupervisorStrategy() throws Exception {
        // code here
    }
}

```

Let us create actors:

```

Props superprops = Props.create(Supervisor.class);
ActorRef supervisor = system.actorOf(superprops, "supervisor");
ActorRef child = (ActorRef) Await.result(ask(supervisor,
    Props.create(Child.class), 5000), timeout);

```

The first test shall demonstrate the `Resume` directive, so we try it out by setting some non-initial state in the actor and have it fail:

```
child.tell(42, ActorRef.noSender());
assert Await.result(ask(child, "get", 5000), timeout).equals(42);
child.tell(new ArithmeticException(), ActorRef.noSender());
assert Await.result(ask(child, "get", 5000), timeout).equals(42);
```

As you can see the value 42 survives the fault handling directive. Now, if we change the failure to a more serious `NullPointerException`, that will no longer be the case:

```
child.tell(new NullPointerException(), ActorRef.noSender());
assert Await.result(ask(child, "get", 5000), timeout).equals(0);
```

And finally in case of the fatal `IllegalArgumentException` the child will be terminated by the supervisor:

```
final TestProbe probe = new TestProbe(system);
probe.watch(child);
child.tell(new IllegalArgumentException(), ActorRef.noSender());
probe.expectMsgClass(Terminated.class);
```

Up to now the supervisor was completely unaffected by the child's failure, because the directives set did handle it. In case of an `Exception`, this is not true anymore and the supervisor escalates the failure.

```
child = (ActorRef) Await.result(ask(supervisor,
    Props.create(Child.class), 5000), timeout);
probe.watch(child);
assert Await.result(ask(child, "get", 5000), timeout).equals(0);
child.tell(new Exception(), ActorRef.noSender());
probe.expectMsgClass(Terminated.class);
```

The supervisor itself is supervised by the top-level actor provided by the `ActorSystem`, which has the default policy to restart in case of all `Exception` cases (with the notable exceptions of `ActorInitializationException` and `ActorKilledException`). Since the default directive in case of a restart is to kill all children, we expected our poor child not to survive this failure.

In case this is not desired (which depends on the use case), we need to use a different supervisor which overrides this behavior.

```
public class Supervisor2 extends UntypedActor {

    private static SupervisorStrategy strategy = new OneForOneStrategy(10,
        Duration.create("1 minute"),
        new Function<Throwable, Directive>() {
            @Override
            public Directive apply(Throwable t) {
                if (t instanceof ArithmeticException) {
                    return resume();
                } else if (t instanceof NullPointerException) {
                    return restart();
                } else if (t instanceof IllegalArgumentException) {
                    return stop();
                } else {
                    return escalate();
                }
            }
        });

    @Override
    public SupervisorStrategy supervisorStrategy() {
        return strategy;
    }
}
```

```

public void onReceive(Object o) {
    if (o instanceof Props) {
        getSender().tell(getContext().actorOf((Props) o), getSelf());
    } else {
        unhandled(o);
    }
}

@Override
public void preRestart(Throwable cause, Option<Object> msg) {
    // do not kill all children, which is the default here
}
}

```

With this parent, the child survives the escalated restart, as demonstrated in the last test:

```

superprops = Props.create(Supervisor2.class);
supervisor = system.actorOf(superprops);
child = (ActorRef) Await.result(ask(supervisor,
    Props.create(Child.class), 5000), timeout);
child.tell(23, ActorRef.noSender());
assert Await.result(ask(child, "get", 5000), timeout).equals(23);
child.tell(new Exception(), ActorRef.noSender());
assert Await.result(ask(child, "get", 5000), timeout).equals(0);

```

3.4 Dispatchers

An Akka `MessageDispatcher` is what makes Akka Actors “tick”, it is the engine of the machine so to speak. All `MessageDispatcher` implementations are also an `ExecutionContext`, which means that they can be used to execute arbitrary code, for instance *Futures*.

3.4.1 Default dispatcher

Every `ActorSystem` will have a default dispatcher that will be used in case nothing else is configured for an Actor. The default dispatcher can be configured, and is by default a `Dispatcher` with a “fork-join-executor”, which gives excellent performance in most cases.

3.4.2 Looking up a Dispatcher

Dispatchers implement the `ExecutionContext` interface and can thus be used to run `Future` invocations etc.

```

// this is scala.concurrent.ExecutionContext
// for use with Futures, Scheduler, etc.
final ExecutionContext ex = system.dispatchers().lookup("my-dispatcher");

```

3.4.3 Setting the dispatcher for an Actor

So in case you want to give your Actor a different dispatcher than the default, you need to do two things, of which the first is to configure the dispatcher:

```

my-dispatcher {
    # Dispatcher is the name of the event-based dispatcher
    type = Dispatcher
    # What kind of ExecutionService to use
    executor = "fork-join-executor"
    # Configuration for the fork join pool
}

```

```

fork-join-executor {
  # Min number of threads to cap factor-based parallelism number to
  parallelism-min = 2
  # Parallelism (threads) ... ceil(available processors * factor)
  parallelism-factor = 2.0
  # Max number of threads to cap factor-based parallelism number to
  parallelism-max = 10
}
# Throughput defines the maximum number of messages to be
# processed per actor before the thread jumps to the next actor.
# Set to 1 for as fair as possible.
throughput = 100
}

```

And here's another example that uses the "thread-pool-executor":

```

my-thread-pool-dispatcher {
  # Dispatcher is the name of the event-based dispatcher
  type = Dispatcher
  # What kind of ExecutionService to use
  executor = "thread-pool-executor"
  # Configuration for the thread pool
  thread-pool-executor {
    # minimum number of threads to cap factor-based core number to
    core-pool-size-min = 2
    # No of core threads ... ceil(available processors * factor)
    core-pool-size-factor = 2.0
    # maximum number of threads to cap factor-based number to
    core-pool-size-max = 10
  }
  # Throughput defines the maximum number of messages to be
  # processed per actor before the thread jumps to the next actor.
  # Set to 1 for as fair as possible.
  throughput = 100
}

```

For more options, see the default-dispatcher section of the [Configuration](#).

Then you create the actor as usual and define the dispatcher in the deployment configuration.

```

ActorRef myActor =
  system.actorOf(Props.create(MyUntypedActor.class),
    "myactor");

```

```

akka.actor.deployment {
  /myactor {
    dispatcher = my-dispatcher
  }
}

```

An alternative to the deployment configuration is to define the dispatcher in code. If you define the dispatcher in the deployment configuration then this value will be used instead of programmatically provided parameter.

```

ActorRef myActor =
  system.actorOf(Props.create(MyUntypedActor.class).withDispatcher("my-dispatcher"),
    "myactor3");

```

Note: The dispatcher you specify in `withDispatcher` and the `dispatcher` property in the deployment configuration is in fact a path into your configuration. So in this example it's a top-level section, but you could for instance put it as a sub-section, where you'd use periods to denote sub-sections, like this: `"foo.bar.my-dispatcher"`

3.4.4 Types of dispatchers

There are 4 different types of message dispatchers:

- Dispatcher
 - This is an event-based dispatcher that binds a set of Actors to a thread pool. It is the default dispatcher used if one is not specified.
 - Sharability: Unlimited
 - Mailboxes: Any, creates one per Actor
 - Use cases: Default dispatcher, Bulkheading
 - **Driven by:** `java.util.concurrent.ExecutorService` specify using “executor” using “fork-join-executor”, “thread-pool-executor” or the FQCN of an `akka.dispatcher.ExecutorServiceConfigurator`
- PinnedDispatcher
 - This dispatcher dedicates a unique thread for each actor using it; i.e. each actor will have its own thread pool with only one thread in the pool.
 - Sharability: None
 - Mailboxes: Any, creates one per Actor
 - Use cases: Bulkheading
 - **Driven by:** Any `akka.dispatch.ThreadPoolExecutorConfigurator` by default a “thread-pool-executor”
- BalancingDispatcher
 - This is an executor based event driven dispatcher that will try to redistribute work from busy actors to idle actors.
 - All the actors share a single Mailbox that they get their messages from.
 - It is assumed that all actors using the same instance of this dispatcher can process all messages that have been sent to one of the actors; i.e. the actors belong to a pool of actors, and to the client there is no guarantee about which actor instance actually processes a given message.
 - Sharability: Actors of the same type only
 - Mailboxes: Any, creates one for all Actors
 - Use cases: Work-sharing
 - **Driven by:** `java.util.concurrent.ExecutorService` specify using “executor” using “fork-join-executor”, “thread-pool-executor” or the FQCN of an `akka.dispatcher.ExecutorServiceConfigurator`
 - Note that you can **not** use a `BalancingDispatcher` as a **Router Dispatcher**. (You can however use it for the **Routees**)
- CallingThreadDispatcher
 - This dispatcher runs invocations on the current thread only. This dispatcher does not create any new threads, but it can be used from different threads concurrently for the same actor. See *CallingThreadDispatcher* for details and restrictions.
 - Sharability: Unlimited
 - Mailboxes: Any, creates one per Actor per Thread (on demand)
 - Use cases: Testing
 - Driven by: The calling thread (duh)

More dispatcher configuration examples

Configuring a `PinnedDispatcher`:

```
my-pinned-dispatcher {
  executor = "thread-pool-executor"
  type = PinnedDispatcher
}
```

And then using it:

```
ActorRef myActor = system.actorOf(Props.create(MyUntypedActor.class)
  .withDispatcher("my-pinned-dispatcher"));
```

Note that `thread-pool-executor` configuration as per the above `my-thread-pool-dispatcher` example is NOT applicable. This is because every actor will have its own thread pool when using `PinnedDispatcher`, and that pool will have only one thread.

Note that it's not guaranteed that the *same* thread is used over time, since the core pool timeout is used for `PinnedDispatcher` to keep resource usage down in case of idle actors. To use the same thread all the time you need to add `thread-pool-executor.allow-core-timeout=off` to the configuration of the `PinnedDispatcher`.

3.5 Mailboxes

An Akka Mailbox holds the messages that are destined for an Actor. Normally each Actor has its own mailbox, but with for example a `BalancingDispatcher` all actors with the same `BalancingDispatcher` will share a single instance.

3.5.1 Mailbox Selection

Requiring a Message Queue Type for an Actor

It is possible to require a certain type of message queue for a certain type of actor by having that actor implement the parameterized interface `RequiresMessageQueue`. Here is an example:

```
import akka.dispatch.BoundedMessageQueueSemantics;
import akka.dispatch.RequiresMessageQueue;

public class MyBoundedUntypedActor extends MyUntypedActor
  implements RequiresMessageQueue<BoundedMessageQueueSemantics> {
}
```

The type parameter to the `RequiresMessageQueue` interface needs to be mapped to a mailbox in configuration like this:

```
bounded-mailbox {
  mailbox-type = "akka.dispatch.BoundedMailbox"
  mailbox-capacity = 1000
  mailbox-push-timeout-time = 10s
}

akka.actor.mailbox.requirements {
  "akka.dispatch.BoundedMessageQueueSemantics" = bounded-mailbox
}
```

Now every time you create an actor of type `MyBoundedUntypedActor` it will try to get a bounded mailbox. If the actor has a different mailbox configured in deployment, either directly or via a dispatcher with a specified mailbox type, then that will override this mapping.

Note: The type of the queue in the mailbox created for an actor will be checked against the required type in the interface and if the queue doesn't implement the required type then actor creation will fail.

Requiring a Message Queue Type for a Dispatcher

A dispatcher may also have a requirement for the mailbox type used by the actors running on it. An example is the `BalancingDispatcher` which requires a message queue that is thread-safe for multiple concurrent consumers. Such a requirement is formulated within the dispatcher configuration section like this:

```
my-dispatcher {
  mailbox-requirement = org.example.MyInterface
}
```

The given requirement names a class or interface which will then be ensured to be a supertype of the message queue's implementation. In case of a conflict—e.g. if the actor requires a mailbox type which does not satisfy this requirement—then actor creation will fail.

How the Mailbox Type is Selected

When an actor is created, the `ActorRefProvider` first determines the dispatcher which will execute it. Then the mailbox is determined as follows:

1. If the actor's deployment configuration section contains a `mailbox` key then that names a configuration section describing the mailbox type to be used.
2. If the actor's `Props` contains a mailbox selection—i.e. `withMailbox` was called on it—then that names a configuration section describing the mailbox type to be used.
3. If the dispatcher's configuration section contains a `mailbox-type` key the same section will be used to configure the mailbox type.
4. If the actor requires a mailbox type as described above then the mapping for that requirement will be used to determine the mailbox type to be used; if that fails then the dispatcher's requirement—if any—will be tried instead.
5. If the dispatcher requires a mailbox type as described above then the mapping for that requirement will be used to determine the mailbox type to be used.
6. The default mailbox `akka.actor.default-mailbox` will be used.

Default Mailbox

When the mailbox is not specified as described above the default mailbox is used. By default it is an unbounded mailbox, which is backed by a `java.util.concurrent.ConcurrentLinkedQueue`.

`SingleConsumerOnlyUnboundedMailbox` is an even more efficient mailbox, and it can be used as the default mailbox, but it cannot be used with a `BalancingDispatcher`.

Configuration of `SingleConsumerOnlyUnboundedMailbox` as default mailbox:

```
akka.actor.default-mailbox {
  mailbox-type = "akka.dispatch.SingleConsumerOnlyUnboundedMailbox"
}
```

Which Configuration is passed to the Mailbox Type

Each mailbox type is implemented by a class which extends `MailboxType` and takes two constructor arguments: a `ActorSystem.Settings` object and a `Config` section. The latter is computed by obtaining the named configuration section from the actor system's configuration, overriding its `id` key with the configuration path of the mailbox type and adding a fall-back to the default mailbox configuration section.

3.5.2 Builtin Mailbox Implementations

Akka comes shipped with a number of mailbox implementations:

- UnboundedMailbox - The default mailbox
 - Backed by a `java.util.concurrent.ConcurrentLinkedQueue`
 - Blocking: No
 - Bounded: No
 - Configuration name: “unbounded” or “akka.dispatch.UnboundedMailbox”
- SingleConsumerOnlyUnboundedMailbox
 - Backed by a very efficient Multiple Producer Single Consumer queue, cannot be used with `BalancingDispatcher`
 - Blocking: No
 - Bounded: No
 - Configuration name: “akka.dispatch.SingleConsumerOnlyUnboundedMailbox”
- BoundedMailbox
 - Backed by a `java.util.concurrent.LinkedBlockingQueue`
 - Blocking: Yes
 - Bounded: Yes
 - Configuration name: “bounded” or “akka.dispatch.BoundedMailbox”
- UnboundedPriorityMailbox
 - Backed by a `java.util.concurrent.PriorityBlockingQueue`
 - Blocking: Yes
 - Bounded: No
 - Configuration name: “akka.dispatch.UnboundedPriorityMailbox”
- BoundedPriorityMailbox
 - Backed by a `java.util.PriorityBlockingQueue` wrapped in an `akka.util.BoundedBlockingQueue`
 - Blocking: Yes
 - Bounded: Yes
 - Configuration name: “akka.dispatch.BoundedPriorityMailbox”
- Durable mailboxes, see *Durable Mailboxes*.

3.5.3 Mailbox configuration examples

How to create a `PriorityMailbox`:

```
public class MyPrioMailbox extends UnboundedPriorityMailbox {
  // needed for reflective instantiation
  public MyPrioMailbox(ActorSystem.Settings settings, Config config) {
    // Create a new PriorityGenerator, lower prio means more important
    super(new PriorityGenerator() {
      @Override
      public int gen(Object message) {
        if (message.equals("highpriority"))
          return 0; // 'highpriority' messages should be treated first if possible
      }
    });
  }
}
```

```

    else if (message.equals("lowpriority"))
        return 2; // 'lowpriority' messages should be treated last if possible
    else if (message.equals(PoisonPill.getInstance()))
        return 3; // PoisonPill when no other left
    else
        return 1; // By default they go between high and low prio
    }
});
}
}

```

And then add it to the configuration:

```

prio-dispatcher {
  mailbox-type = "docs.dispatcher.DispatcherDocSpec$MyPrioMailbox"
  //Other dispatcher configuration goes here
}

```

And then an example on how you would use it:

```

class Demo extends UntypedActor {
  LoggingAdapter log = Logging.getLogger(getContext().system(), this);
  {
    for (Object msg : new Object[] { "lowpriority", "lowpriority",
      "highpriority", "pigdog", "pigdog2", "pigdog3", "highpriority",
      PoisonPill.getInstance() }) {
      getSelf().tell(msg, getSelf());
    }
  }

  public void onReceive(Object message) {
    log.info(message.toString());
  }
}

// We create a new Actor that just prints out what it processes
ActorRef myActor = system.actorOf(Props.create(Demo.class, this)
  .withDispatcher("prio-dispatcher"));

/*
Logs:
'highpriority
'highpriority
'pigdog
'pigdog2
'pigdog3
'lowpriority
'lowpriority
*/

```

It is also possible to configure a mailbox type directly like this:

```

prio-mailbox {
  mailbox-type = "docs.dispatcher.DispatcherDocSpec$MyPrioMailbox"
  //Other mailbox configuration goes here
}

akka.actor.deployment {
  /priomailboxactor {
    mailbox = prio-mailbox
  }
}

```

And then use it either from deployment like this:

```
ActorRef myActor =
    system.actorOf(Props.create(MyUntypedActor.class),
        "priomailboxactor");
```

Or code like this:

```
ActorRef myActor =
    system.actorOf(Props.create(MyUntypedActor.class)
        .withMailbox("prio-mailbox"));
```

3.5.4 Creating your own Mailbox type

An example is worth a thousand quacks:

```
import akka.actor.ActorRef;
import akka.actor.ActorSystem;
import akka.dispatch.Envelope;
import akka.dispatch.MailboxType;
import akka.dispatch.MessageQueue;
import akka.dispatch.ProducesMessageQueue;
import com.typesafe.config.Config;
import java.util.concurrent.ConcurrentLinkedQueue;
import java.util.Queue;
import scala.Option;

public class MyUnboundedJMailbox implements MailboxType,
    ProducesMessageQueue<MyUnboundedJMailbox.MyMessageQueue> {

    // This is the MessageQueue implementation
    public static class MyMessageQueue implements MessageQueue,
        MyUnboundedJMessageQueueSemantics {
        private final Queue<Envelope> queue =
            new ConcurrentLinkedQueue<Envelope>();

        // these must be implemented; queue used as example
        public void enqueue(ActorRef receiver, Envelope handle) {
            queue.offer(handle);
        }
        public Envelope dequeue() { return queue.poll(); }
        public int numberOfMessages() { return queue.size(); }
        public boolean hasMessages() { return !queue.isEmpty(); }
        public void cleanUp(ActorRef owner, MessageQueue deadLetters) {
            for (Envelope handle: queue) {
                deadLetters.enqueue(owner, handle);
            }
        }
    }

    // This constructor signature must exist, it will be called by Akka
    public MyUnboundedJMailbox(ActorSystem.Settings settings, Config config) {
        // put your initialization code here
    }

    // The create method is called to create the MessageQueue
    public MessageQueue create(Option<ActorRef> owner, Option<ActorSystem> system) {
        return new MyMessageQueue();
    }
}

// Marker interface used for mailbox requirements mapping
public interface MyUnboundedJMessageQueueSemantics {
}
```

And then you just specify the FQCN of your `MailboxType` as the value of the “mailbox-type” in the dispatcher configuration, or the mailbox configuration.

Note: Make sure to include a constructor which takes `akka.actor.ActorSystem.Settings` and `com.typesafe.config.Config` arguments, as this constructor is invoked reflectively to construct your mailbox type. The config passed in as second argument is that section from the configuration which describes the dispatcher or mailbox setting using this mailbox type; the mailbox type will be instantiated once for each dispatcher or mailbox setting using it.

You can also use the mailbox as a requirement on the dispatcher like this:

```
custom-dispatcher {
  mailbox-requirement =
    "docs.dispatcher.MyUnboundedJMessageQueueSemantics"
}

akka.actor.mailbox.requirements {
  "docs.dispatcher.MyUnboundedJMessageQueueSemantics" =
    custom-dispatcher-mailbox
}

custom-dispatcher-mailbox {
  mailbox-type = "docs.dispatcher.MyUnboundedJMailbox"
}
```

Or by defining the requirement on your actor class like this:

```
public class MySpecialActor extends UntypedActor implements
  RequiresMessageQueue<MyUnboundedJMessageQueueSemantics> {
  // ...
}
```

3.5.5 Special Semantics of `system.actorOf`

In order to make `system.actorOf` both synchronous and non-blocking while keeping the return type `ActorRef` (and the semantics that the returned ref is fully functional), special handling takes place for this case. Behind the scenes, a hollow kind of actor reference is constructed, which is sent to the system’s guardian actor who actually creates the actor and its context and puts those inside the reference. Until that has happened, messages sent to the `ActorRef` will be queued locally, and only upon swapping the real filling in will they be transferred into the real mailbox. Thus,

```
final Props props = ...
// this actor uses MyCustomMailbox, which is assumed to be a singleton
system.actorOf(props.withDispatcher("myCustomMailbox").tell("bang", sender);
assert(MyCustomMailbox.getInstance().getLastEnqueued().equals("bang"));
```

will probably fail; you will have to allow for some time to pass and retry the check à la `TestKit.awaitCond`.

3.6 Routing

A Router is an actor that receives messages and efficiently routes them to other actors, known as its *routees*.

Different routing strategies can be used, according to your application’s needs. Akka comes with several useful routing strategies right out of the box. But, as you will see in this chapter, it is also possible to *create your own*.

The routers shipped with Akka are:

- `akka.routing.RoundRobinRouter`
- `akka.routing.RandomRouter`

- akka.routing.SmallestMailboxRouter
- akka.routing.BroadcastRouter
- akka.routing.ScatterGatherFirstCompletedRouter
- akka.routing.ConsistentHashingRouter

3.6.1 Routers in Action

Sending a message to a router is easy.

```
router.tell(new MyMsg(), sender);
```

A router actor forwards messages to its routees according to its routing policy.

Note: In general, any message sent to a router will be sent onwards to its routees. But there are a few exceptions. These are documented in the *Handling for Special Messages* section below.

Creating a Router

Routers and routees are closely intertwined. Router actors are created by specifying the desired *routee* Props then attaching the router's RouterConfig. When you create a router actor it will create routees, as needed, as its children.

For example, the following code and configuration snippets show how to create a *round-robin* router that forwards messages to five ExampleActor routees. The routees will be created as the router's children.

```
akka.actor.deployment {
  /myrouter1 {
    router = round-robin
    nr-of-instances = 5
  }
}
```

```
ActorRef router = system.actorOf(
  Props.create(ExampleActor.class).withRouter(new FromConfig()), "myrouter1");
```

Here is the same example, but with the router configuration provided programmatically instead of from configuration.

```
int nrOfInstances = 5;
ActorRef router1 = system.actorOf(
  Props.create(ExampleActor.class).withRouter(new RoundRobinRouter(nrOfInstances)));
```

Sometimes, rather than having the router create its routees, it is desirable to create routees separately and provide them to the router for its use. You can do this by passing an Iterable of routees to the router's configuration.

The example below shows how to create a router by providing it with the ActorRefs of three routee actors.

```
ActorRef actor1 = system.actorOf(Props.create(ExampleActor.class));
ActorRef actor2 = system.actorOf(Props.create(ExampleActor.class));
ActorRef actor3 = system.actorOf(Props.create(ExampleActor.class));
Iterable<ActorRef> routees = Arrays.asList(
  new ActorRef[] { actor1, actor2, actor3 });
ActorRef router2 = system.actorOf(
  Props.empty().withRouter(RoundRobinRouter.create(routees)));
```

Routees can also be specified by providing their path strings instead of their ActorRefs.

```
ActorRef actor1 = system.actorOf(Props.create(ExampleActor.class), "actor1");
ActorRef actor2 = system.actorOf(Props.create(ExampleActor.class), "actor2");
ActorRef actor3 = system.actorOf(Props.create(ExampleActor.class), "actor3");
Iterable<String> routees = Arrays.asList(
    new String[] { "/user/actor1", "/user/actor2", "/user/actor3" });
ActorRef router = system.actorOf(
    Props.empty().withRouter(new RoundRobinRouter(routees)));
```

In addition to being able to supply looked-up remote actors as routees, you can ask the router to deploy its created children on a set of remote hosts. Routees will be deployed in round-robin fashion. In order to deploy routees remotely, wrap the router configuration in a `RemoteRouterConfig`, attaching the remote addresses of the nodes to deploy to. Remote deployment requires the `akka-remote` module to be included in the classpath.

```
Address addr1 = new Address("akka", "remotesys", "otherhost", 1234);
Address addr2 = AddressFromURIString.parse("akka://othersys@anotherhost:1234");
Address[] addresses = new Address[] { addr1, addr2 };
ActorRef routerRemote = system.actorOf(Props.create(ExampleActor.class)
    .withRouter(new RemoteRouterConfig(new RoundRobinRouter(5), addresses)));
```

There are a few gotchas to be aware of when creating routers:

- If you define the `router` in the configuration file then this value will be used instead of any programmatically provided parameters.
- Although routers can be configured in the configuration file, they must still be created programmatically, i.e. you cannot make a router through external configuration alone.
- If you provide the `routees` in the router configuration then the value of `nrOfInstances`, if provided, will be disregarded.
- When you provide routees programmatically the router will generally ignore the routee `Props`, as it does not need to create routees. However, if you use a *resizable router* then the routee `Props` will be used whenever the resizer creates new routees.

Routers, Routees and Senders

The router forwards messages onto its routees without changing the original sender. When a routee replies to a routed message, the reply will be sent to the original sender, not to the router.

When a router creates routees, they are created as the routers children. This gives each routee its own identity in the actor system.

When a routee replies it can *set itself* as the sender of the reply.

```
getSender().tell("reply", getSelf()); // replies go to this actor
```

However, it is often useful for routees to set the *router* as the sender. For example, you might want to set the router as the sender if you want to hide the details of the routees behind the router. The following code snippet shows how to set the parent router as sender.

```
getSender().tell("reply", getContext().parent()); // replies go to router
```

Note that different code would be needed if the routees were not children of the router, i.e. if they were provided when the router was created.

3.6.2 Routers and Supervision

Routees can be created by a router or provided to the router when it is created. Any routees that are created by a router will be created as the router's children. The router is therefore also the children's supervisor.

The supervision strategy of the router actor can be configured with the `RouterConfig.supervisorStrategy` property. If no configuration is provided, routers default to

a strategy of “always escalate”. This means that errors are passed up to the router’s supervisor for handling. The router’s supervisor will decide what to do about any errors.

Note the router’s supervisor will treat the error as an error with the router itself. Therefore a directive to stop or restart will cause the router *itself* to stop or restart. The router, in turn, will cause its children to stop and restart.

It should be mentioned that the router’s restart behavior has been overridden so that a restart, while still re-creating the children, will still preserve the same number of actors in the pool.

This means that if you have not specified `supervisorStrategy` of the router or its parent a failure in a routee will escalate to the parent of the router, which will by default restart the router, which will restart all routees (it uses `Escalate` and does not stop routees during restart). The reason is to make the default behave such that adding `withRouter` to a child’s definition does not change the supervision strategy applied to the child. This might be an inefficiency that you can avoid by specifying the strategy when defining the router.

Setting the strategy is easily done:

```
final SupervisorStrategy strategy =
    new OneForOneStrategy(5, Duration.create("1 minute"),
        Collections.<Class<? extends Throwable>>singletonList(Exception.class));
final ActorRef router = system.actorOf(Props.create(MyActor.class)
    .withRouter(new RoundRobinRouter(5).withSupervisorStrategy(strategy)));
```

Note: If the child of a router terminates, the router will not automatically spawn a new child. In the event that all children of a router have terminated the router will terminate itself, unless it is a dynamic router, e.g. using a `resizer`.

3.6.3 Router usage

In this section we will describe how to use the different router types. First we need to create some actors that will be used in the examples:

```
public class PrintlnActor extends UntypedActor {
    public void onReceive(Object msg) {
        System.out.println(String.format("Received message '%s' in actor %s",
            msg, getSelf().path().name()));
    }
}
```

and

```
public class FibonacciActor extends UntypedActor {
    public void onReceive(Object msg) {
        if (msg instanceof FibonacciNumber) {
            FibonacciNumber fibonacciNumber = (FibonacciNumber) msg;
            getSender().tell(fibonacci(fibonacciNumber.getNbr()), getSelf());
        } else {
            unhandled(msg);
        }
    }

    private int fibonacci(int n) {
        return fib(n, 1, 0);
    }

    private int fib(int n, int b, int a) {
        if (n == 0)
            return a;
        // recursion
        return fib(n - 1, a + b, b);
    }
}
```

```

public static class FibonacciNumber implements Serializable {
    private static final long serialVersionUID = 1L;
    private final int nbr;

    public FibonacciNumber(int nbr) {
        this.nbr = nbr;
    }

    public int getNbr() {
        return nbr;
    }
}

```

RoundRobinRouter

Routes in a round-robin fashion to its routees. Code example:

```

ActorRef roundRobinRouter = getContext().actorOf(
    Props.create(PrintlnActor.class).withRouter(new RoundRobinRouter(5)),
    "router");
for (int i = 1; i <= 10; i++) {
    roundRobinRouter.tell(i, getSelf());
}

```

When run you should see a similar output to this:

```

Received message '1' in actor $b
Received message '2' in actor $c
Received message '3' in actor $d
Received message '6' in actor $b
Received message '4' in actor $e
Received message '8' in actor $d
Received message '5' in actor $f
Received message '9' in actor $e
Received message '10' in actor $f
Received message '7' in actor $c

```

If you look closely to the output you can see that each of the routees received two messages which is exactly what you would expect from a round-robin router to happen. (The name of an actor is automatically created in the format `$letter` unless you specify it - hence the names printed above.)

This is an example of how to define a round-robin router in configuration:

```

akka.actor.deployment {
  /myrouter1 {
    router = round-robin
    nr-of-instances = 5
  }
}

```

RandomRouter

As the name implies this router type selects one of its routees randomly and forwards the message it receives to this routee. This procedure will happen each time it receives a message. Code example:

```

ActorRef randomRouter = getContext().actorOf(
    Props.create(PrintlnActor.class).withRouter(new RandomRouter(5)),
    "router");
for (int i = 1; i <= 10; i++) {

```

```
randomRouter.tell(i, getSelf());
}
```

When run you should see a similar output to this:

```
Received message '1' in actor $e
Received message '2' in actor $c
Received message '4' in actor $b
Received message '5' in actor $d
Received message '3' in actor $e
Received message '6' in actor $c
Received message '7' in actor $d
Received message '8' in actor $e
Received message '9' in actor $d
Received message '10' in actor $d
```

The result from running the random router should be different, or at least random, every time you run it. Try to run it a couple of times to verify its behavior if you don't trust us.

This is an example of how to define a random router in configuration:

```
akka.actor.deployment {
  /myrouter3 {
    router = random
    nr-of-instances = 5
  }
}
```

SmallestMailboxRouter

A Router that tries to send to the non-suspended routee with fewest messages in mailbox. The selection is done in this order:

- pick any idle routee (not processing message) with empty mailbox
- pick any routee with empty mailbox
- pick routee with fewest pending messages in mailbox
- pick any remote routee, remote actors are consider lowest priority, since their mailbox size is unknown

Code example:

```
ActorRef smallestMailboxRouter = getContext().actorOf(
  Props.create(PrintlnActor.class).withRouter(new SmallestMailboxRouter(5)),
  "router");
for (int i = 1; i <= 10; i++) {
  smallestMailboxRouter.tell(i, getSelf());
}
```

This is an example of how to define a smallest-mailbox router in configuration:

```
akka.actor.deployment {
  /myrouter4 {
    router = smallest-mailbox
    nr-of-instances = 5
  }
}
```

BroadcastRouter

A broadcast router forwards the message it receives to *all* its routees. Code example:

```
ActorRef broadcastRouter = getContext().actorOf(
  Props.create(PrintlnActor.class).withRouter(new BroadcastRouter(5)), "router");
broadcastRouter.tell("this is a broadcast message", getSelf());
```

When run you should see a similar output to this:

```
Received message 'this is a broadcast message' in actor $f
Received message 'this is a broadcast message' in actor $d
Received message 'this is a broadcast message' in actor $e
Received message 'this is a broadcast message' in actor $c
Received message 'this is a broadcast message' in actor $b
```

As you can see here above each of the routees, five in total, received the broadcast message.

This is an example of how to define a broadcast router in configuration:

```
akka.actor.deployment {
  /myrouter5 {
    router = broadcast
    nr-of-instances = 5
  }
}
```

Note: Broadcast routers always broadcast *every* message to their routees. If you do not want to broadcast every message, then you can use a non-broadcasting router and use *Broadcast Messages* as needed.

ScatterGatherFirstCompletedRouter

The ScatterGatherFirstCompletedRouter will send the message on to all its routees as a future. It then waits for first result it gets back. This result will be sent back to original sender. Code example:

```
ActorRef scatterGatherFirstCompletedRouter = getContext().actorOf(
  Props.create(FibonacciActor.class).withRouter(
    new ScatterGatherFirstCompletedRouter(5, Duration.create(2, "seconds"))),
  "router");
Timeout timeout = new Timeout(Duration.create(5, "seconds"));
Future<Object> futureResult = akka.pattern.Patterns.ask(
  scatterGatherFirstCompletedRouter, new FibonacciActor.FibonacciNumber(10),
  timeout);
int result = (Integer) Await.result(futureResult, timeout.duration());
```

When run you should see this:

```
The result of calculating Fibonacci for 10 is 55
```

From the output above you can't really see that all the routees performed the calculation, but they did! The result you see is from the first routee that returned its calculation to the router.

This is an example of how to define a scatter-gather router in configuration:

```
akka.actor.deployment {
  /myrouter6 {
    router = scatter-gather
    nr-of-instances = 5
    within = 10 seconds
  }
}
```

ConsistentHashingRouter

The ConsistentHashingRouter uses [consistent hashing](#) to select a connection based on the sent message. This [article](#) gives good insight into how consistent hashing is implemented.

There is 3 ways to define what data to use for the consistent hash key.

- You can define `withHashMapper` of the router to map incoming messages to their consistent hash key. This makes the the decision transparent for the sender.
- The messages may implement `akka.routing.ConsistentHashingRouter.ConsistentHashable`. The key is part of the message and it's convenient to define it together with the message definition.
- The messages can be wrapped in a `akka.routing.ConsistentHashingRouter.ConsistentHashableEnvelope` to define what data to use for the consistent hash key. The sender knows the key to use.

These ways to define the consistent hash key can be use together and at the same time for one router. The `withHashMapper` is tried first.

Code example:

```
import akka.actor.UntypedActor;
import akka.routing.ConsistentHashingRouter.ConsistentHashable;
import java.util.Map;
import java.util.HashMap;
import java.io.Serializable;

public class Cache extends UntypedActor {
    Map<String, String> cache = new HashMap<String, String>();

    public void onReceive(Object msg) {
        if (msg instanceof Entry) {
            Entry entry = (Entry) msg;
            cache.put(entry.key, entry.value);
        } else if (msg instanceof Get) {
            Get get = (Get) msg;
            Object value = cache.get(get.key);
            getSender().tell(value == null ? NOT_FOUND : value,
                getContext().self());
        } else if (msg instanceof Evict) {
            Evict evict = (Evict) msg;
            cache.remove(evict.key);
        } else {
            unhandled(msg);
        }
    }
}

public final class Evict implements Serializable {
    private static final long serialVersionUID = 1L;
    public final String key;
    public Evict(String key) {
        this.key = key;
    }
}

public final class Get implements Serializable, ConsistentHashable {
    private static final long serialVersionUID = 1L;
    public final String key;
    public Get(String key) {
        this.key = key;
    }
    public Object consistentHashKey() {
        return key;
    }
}
```

```

}

public final class Entry implements Serializable {
    private static final long serialVersionUID = 1L;
    public final String key;
    public final String value;
    public Entry(String key, String value) {
        this.key = key;
        this.value = value;
    }
}

public final String NOT_FOUND = "NOT_FOUND";

import akka.actor.Props;
import akka.actor.ActorRef;
import akka.routing.ConsistentHashingRouter;
import akka.routing.ConsistentHashingRouter.ConsistentHashMapper;
import akka.routing.ConsistentHashingRouter.ConsistentHashableEnvelope;

final ConsistentHashMapper hashMapper = new ConsistentHashMapper() {
    @Override
    public Object hashKey(Object message) {
        if (message instanceof Evict) {
            return ((Evict) message).key;
        } else {
            return null;
        }
    }
};

ActorRef cache = system.actorOf(Props.create(Cache.class).withRouter(
    new ConsistentHashingRouter(10).withHashMapper(hashMapper)),
    "cache");

cache.tell(new ConsistentHashableEnvelope(
    new Entry("hello", "HELLO"), "hello"), getRef());
cache.tell(new ConsistentHashableEnvelope(
    new Entry("hi", "HI"), "hi"), getRef());

cache.tell(new Get("hello"), getRef());
expectMsgEquals("HELLO");

cache.tell(new Get("hi"), getRef());
expectMsgEquals("HI");

cache.tell(new Evict("hi"), getRef());
cache.tell(new Get("hi"), getRef());
expectMsgEquals(NOT_FOUND);

```

In the above example you see that the `Get` message implements `ConsistentHashable` itself, while the `Entry` message is wrapped in a `ConsistentHashableEnvelope`. The `Evict` message is handled by the `withHashMapper`.

This is an example of how to define a consistent-hashing router in configuration:

```

akka.actor.deployment {
  /myrouter7 {
    router = consistent-hashing
    nr-of-instances = 5
    virtual-nodes-factor = 10
  }
}

```

3.6.4 Handling for Special Messages

Most messages sent to routers will be forwarded according to the routers' usual routing rules. However there are a few types of messages that have special behavior.

Broadcast Messages

A `Broadcast` message can be used to send a message to *all* of a router's routees. When a router receives a `Broadcast` message, it will broadcast that message's *payload* to all routees, no matter how that router would normally route its messages.

The example below shows how you would use a `Broadcast` message to send a very important message to every routee of a router.

```
router.tell(new Broadcast("Watch out for Davy Jones' locker"), getSelf());
```

In this example the router receives the `Broadcast` message, extracts its payload ("Watch out for Davy Jones' locker"), and then sends the payload on to all of the router's routees. It is up to each each routee actor to handle the received payload message.

PoisonPill Messages

A `PoisonPill` message has special handling for all actors, including for routers. When any actor receives a `PoisonPill` message, that actor will be stopped. See the [PoisonPill](#) documentation for details.

```
router.tell(PoisonPill.getInstance(), getSelf());
```

For a router, which normally passes on messages to routees, it is important to realise that `PoisonPill` messages are processed by the router only. `PoisonPill` messages sent to a router will *not* be sent on to routees.

However, a `PoisonPill` message sent to a router may still affect its routees, because it will stop the router and when the router stops it also stops its children. Stopping children is normal actor behavior. The router will stop routees that it has created as children. Each child will process its current message and then `tstop`. This may lead to some messages being unprocessed. See the documentation on [Stopping actors](#) for more information.

If you wish to stop a router and its routees, but you would like the routees to first process all the messages currently in their mailboxes, then you should not send a `PoisonPill` message to the router. Instead you should wrap a `PoisonPill` message inside a broadcast message so that each routee will the `PoisonPill` message directly. Note that this will stop all routees, even if the routees aren't children of the router, i.e. even routees programmatically provided to the router.

```
router.tell(new Broadcast(PoisonPill.getInstance()), getSelf());
```

With the code shown above, each routee will receive a `PoisonPill` message. Each routee will continue to process its messages as normal, eventually processing the `PoisonPill`. This will cause the routee to stop. After all routees have stopped the router will itself be *stopped automatically* unless it is a dynamic router, e.g. using a `resizer`.

Note: Brendan W McAdams' excellent blog post [Distributing Akka Workloads - And Shutting Down Afterwards](#) discusses in more detail how `PoisonPill` messages can be used to shut down routers and routees.

Kill Messages

Kill messages are another type of message that has special handling. See [Killing an Actor](#) for general information about how actors handle `Kill` messages.

When a `Kill` message is sent to a router the router processes the message internally, and does *not* send it on to its routees. The router will throw an `ActorKilledException` and fail. It will then be either resumed, restarted or terminated, depending how it is supervised.

Routees that are children of the router will also be suspended, and will be affected by the supervision directive that is applied to the router. Routees that are not the routers children, i.e. those that were created externally to the router, will not be affected.

```
router.tell(Kill.getInstance(), getSelf());
```

As with the `PoisonPill` message, there is a distinction between killing a router, which indirectly kills its children (who happen to be routees), and killing routees directly (some of whom may not be children.) To kill routees directly the router should be sent a `Kill` message wrapped in a `Broadcast` message.

```
router.tell(new Broadcast(Kill.getInstance()), getSelf());
```

3.6.5 Dynamically Resizable Routers

All routers can be used with a fixed number of routees or with a resize strategy to adjust the number of routees dynamically.

This is an example of how to create a resizable router that is defined in configuration:

```
akka.actor.deployment {
  /myrouter2 {
    router = round-robin
    resizer {
      lower-bound = 2
      upper-bound = 15
    }
  }
}
```

```
ActorRef router2 = system.actorOf(
  Props.create(ExampleActor.class).withRouter(new FromConfig()), "myrouter2");
```

Several more configuration options are available and described in `akka.actor.deployment.default.resizer` section of the reference [Configuration](#).

This is an example of how to programmatically create a resizable router:

```
int lowerBound = 2;
int upperBound = 15;
DefaultResizer resizer = new DefaultResizer(lowerBound, upperBound);
ActorRef router3 = system.actorOf(
  Props.create(ExampleActor.class).withRouter(new RoundRobinRouter(resizer)));
```

It is also worth pointing out that if you define the “router“ in the configuration file then this value will be used instead of any programmatically sent parameters.

Note: Resizing is triggered by sending messages to the actor pool, but it is not completed synchronously; instead a message is sent to the “head” Router to perform the size change. Thus you cannot rely on resizing to instantaneously create new workers when all others are busy, because the message just sent will be queued to the mailbox of a busy actor. To remedy this, configure the pool to use a balancing dispatcher, see [Configuring Dispatchers](#) for more information.

3.6.6 How Routing is Designed within Akka

On the surface routers look like normal actors, but they are actually implemented differently. Routers are designed to be extremely efficient at receiving messages and passing them quickly on to routees.

A normal actor can be used for routing messages, but an actor’s single-threaded processing can become a bottleneck. Routers can achieve much higher throughput with an optimization to the usual message-processing pipeline that allows concurrent routing. This is achieved by embedding routers’ routing logic directly in their `ActorRef`

rather than in the router actor. Messages sent to a router's `ActorRef` can be immediately routed to the routee, bypassing the single-threaded router actor entirely.

The cost to this is, of course, that the internals of routing code are more complicated than if routers were implemented with normal actors. Fortunately all of this complexity is invisible to consumers of the routing API. However, it is something to be aware of when implementing your own routers.

3.6.7 Custom Router

You can create your own router should you not find any of the ones provided by Akka sufficient for your needs. In order to roll your own router you have to fulfill certain criteria which are explained in this section.

Before creating your own router you should consider whether a normal actor with router-like behavior might do the job just as well as a full-blown router. As explained *above*, the primary benefit of routers over normal actors is their higher performance. But they are somewhat more complicated to write than normal actors. Therefore if lower maximum throughput is acceptable in your application you may wish to stick with traditional actors. This section, however, assumes that you wish to get maximum performance and so demonstrates how you can create your own router.

The router created in this example is a simple vote counter. It will route the votes to specific vote counter actors. In this case we only have two parties the Republicans and the Democrats. We would like a router that forwards all democrat related messages to the Democrat actor and all republican related messages to the Republican actor.

We begin with defining the class:

```
public class VoteCountRouter extends CustomRouterConfig {

    @Override public String routerDispatcher() {
        return Dispatchers.DefaultDispatcherId();
    }

    @Override public SupervisorStrategy supervisorStrategy() {
        return SupervisorStrategy.defaultStrategy();
    }

    // crRoute ...

}
```

The next step is to implement the `createCustomRoute` method in the class just defined:

```
@Override
public CustomRoute createCustomRoute(RouteeProvider routeeProvider) {
    final ActorRef democratActor =
        routeeProvider.context().actorOf(Props.create(DemocratActor.class), "d");
    final ActorRef republicanActor =
        routeeProvider.context().actorOf(Props.create(RepublicanActor.class), "r");
    List<ActorRef> routees =
        Arrays.asList(new ActorRef[] { democratActor, republicanActor });

    routeeProvider.registerRoutees(routees);

    return new CustomRoute() {
        @Override
        public scala.collection.immutable.Seq<Destination> destinationsFor(
            ActorRef sender, Object msg) {
            switch ((Message) msg) {
                case DemocratVote:
                case DemocratCountResult:
                    return akka.japi.Util.immutableSingletonSeq(
                        new Destination(sender, democratActor));
                case RepublicanVote:
                case RepublicanCountResult:
```

```

        return akka.japi.Util.immutableSingletonSeq(
            new Destination(sender, republicanActor));
    default:
        throw new IllegalArgumentException("Unknown message: " + msg);
    }
}
};
}

```

As you can see above we start off by creating the routees and put them in a collection.

Make sure that you don't miss to implement the line below as it is *really* important. It registers the routees internally and failing to call this method will cause a `ActorInitializationException` to be thrown when the router is used. Therefore always make sure to do the following in your custom router:

```
routeeProvider.registerRoutees(routees);
```

The routing logic is where your magic sauce is applied. In our example it inspects the message types and forwards to the correct routee based on this:

```

return new CustomRoute() {
    @Override
    public scala.collection.immutable.Seq<Destination> destinationsFor(
        ActorRef sender, Object msg) {
        switch ((Message) msg) {
            case DemocratVote:
            case DemocratCountResult:
                return akka.japi.Util.immutableSingletonSeq(
                    new Destination(sender, democratActor));
            case RepublicanVote:
            case RepublicanCountResult:
                return akka.japi.Util.immutableSingletonSeq(
                    new Destination(sender, republicanActor));
            default:
                throw new IllegalArgumentException("Unknown message: " + msg);
        }
    }
};

```

As you can see above what's returned in the `CustomRoute` function, which defines the mapping from incoming sender/message to a `List of Destination(sender, routee)`. The sender is what "parent" the routee should see - changing this could be useful if you for example want another actor than the original sender to intermediate the result of the routee (if there is a result). For more information about how to alter the original sender we refer to the source code of [ScatterGatherFirstCompletedRouter](#)

All in all the custom router looks like this:

```

enum Message {
    DemocratVote, DemocratCountResult, RepublicanVote, RepublicanCountResult
}

public class DemocratActor extends UntypedActor {
    int counter = 0;

    public void onReceive(Object msg) {
        switch ((Message) msg) {
            case DemocratVote:
                counter++;
                break;
            case DemocratCountResult:
                getSender().tell(counter, getSelf());
                break;
            default:
                unhandled(msg);
        }
    }
}

```

```

    }
  }
}

public class RepublicanActor extends UntypedActor {
  int counter = 0;

  public void onReceive(Object msg) {
    switch ((Message) msg) {
      case RepublicanVote:
        counter++;
        break;
      case RepublicanCountResult:
        getSender().tell(counter, getSelf());
        break;
      default:
        unhandled(msg);
    }
  }
}

public class VoteCountRouter extends CustomRouterConfig {

  @Override public String routerDispatcher() {
    return Dispatchers.DefaultDispatcherId();
  }

  @Override public SupervisorStrategy supervisorStrategy() {
    return SupervisorStrategy.defaultStrategy();
  }

  @Override
  public CustomRoute createCustomRoute(RouteeProvider routeeProvider) {
    final ActorRef democratActor =
      routeeProvider.context().actorOf(Props.create(DemocratActor.class), "d");
    final ActorRef republicanActor =
      routeeProvider.context().actorOf(Props.create(RepublicanActor.class), "r");
    List<ActorRef> routees =
      Arrays.asList(new ActorRef[] { democratActor, republicanActor });

    routeeProvider.registerRoutees(routees);

    return new CustomRoute() {
      @Override
      public scala.collection.immutable.Seq<Destination> destinationsFor(
        ActorRef sender, Object msg) {
        switch ((Message) msg) {
          case DemocratVote:
          case DemocratCountResult:
            return akka.japi.Util.immutableSingletonSeq(
              new Destination(sender, democratActor));
          case RepublicanVote:
          case RepublicanCountResult:
            return akka.japi.Util.immutableSingletonSeq(
              new Destination(sender, republicanActor));
          default:
            throw new IllegalArgumentException("Unknown message: " + msg);
        }
      }
    };
  }
}

```

If you are interested in how to use the `VoteCountRouter` it looks like this:

```
@Test
public void countVotesAsIntendedNotAsInFlorida() throws Exception {
    ActorRef routedActor = system.actorOf(
        Props.empty().withRouter(new VoteCountRouter()));
    routedActor.tell(DemocratVote, ActorRef.noSender());
    routedActor.tell(DemocratVote, ActorRef.noSender());
    routedActor.tell(RepublicanVote, ActorRef.noSender());
    routedActor.tell(DemocratVote, ActorRef.noSender());
    routedActor.tell(RepublicanVote, ActorRef.noSender());
    Timeout timeout = new Timeout(Duration.create(1, "seconds"));
    Future<Object> democratsResult =
        ask(routedActor, DemocratCountResult, timeout);
    Future<Object> republicansResult =
        ask(routedActor, RepublicanCountResult, timeout);

    assertEquals(3, Await.result(democratsResult, timeout.duration()));
    assertEquals(2, Await.result(republicansResult, timeout.duration()));
}
```

Caution: When creating a custom router the resulting `RoutedActorRef` optimizes the sending of the message so that it does NOT go through the router's mailbox unless the route returns an empty recipient set. This means that the route function defined in the `RouterConfig` or the function returned from `CreateCustomRoute` in `CustomRouterConfig` is evaluated concurrently without protection by the `RoutedActorRef`: either provide a reentrant (i.e. pure) implementation or do the locking yourself!

Configured Custom Router

It is possible to define configuration properties for custom routers. In the `router` property of the deployment configuration you define the fully qualified class name of the router class. The router class must extend `akka.routing.CustomRouterConfig` and have constructor with one `com.typesafe.config.Config` parameter. The deployment section of the configuration is passed to the constructor.

Custom Resizer

A router with dynamically resizable number of routees is implemented by providing a `akka.routing.Resizer` in `resizer` method of the `RouterConfig`. See `akka.routing.DefaultResizer` for inspiration of how to write your own resize strategy.

3.6.8 Configuring Dispatchers

The dispatcher for created children of the router will be taken from `Props` as described in *Dispatchers*. For a dynamic pool it makes sense to configure the `BalancingDispatcher` if the precise routing is not so important (i.e. no consistent hashing or round-robin is required); this enables newly created routees to pick up work immediately by stealing it from their siblings.

Note: If you provide a collection of actors to route to, then they will still use the same dispatcher that was configured for them in their `Props`, it is not possible to change an actor's dispatcher after it has been created.

The "head" router cannot always run on the same dispatcher, because it does not process the same type of messages, hence this special actor does not use the dispatcher configured in `Props`, but takes the `routerDispatcher` from the `RouterConfig` instead, which defaults to the actor system's default dispatcher. All standard routers allow setting this property in their constructor or factory method, custom routers have to implement the method in a suitable way.

```
final ActorRef router = system.actorOf(Props.create(MyActor.class)
// "head" router will run on "head" dispatcher
.withRouter(new RoundRobinRouter(5).withDispatcher("head"))
// MyActor "workers" will run on "workers" dispatcher
.withDispatcher("workers"));
```

Note: It is not allowed to configure the `routerDispatcher` to be a `BalancingDispatcher` since the messages meant for the special router actor cannot be processed by any other actor.

At first glance there seems to be an overlap between the `BalancingDispatcher` and Routers, but they complement each other. The balancing dispatcher is in charge of running the actors while the routers are in charge of deciding which message goes where. A router can also have children that span multiple actor systems, even remote ones, but a dispatcher lives inside a single actor system.

When using a `RoundRobinRouter` with a `BalancingDispatcher` there are some configuration settings to take into account.

- There can only be `nr-of-instances` messages being processed at the same time no matter how many threads are configured for the `BalancingDispatcher`.
- Having `throughput` set to a low number makes no sense since you will only be handing off to another actor that processes the same `MailBox` as yourself, which can be costly. Either the message just got into the mailbox and you can receive it as well as anybody else, or everybody else is busy and you are the only one available to receive the message.
- Resizing the number of routees only introduce inertia, since resizing is performed at specified intervals, but work stealing is instantaneous.

3.7 Building Finite State Machine Actors

3.7.1 Overview

The FSM (Finite State Machine) pattern is best described in the [Erlang design principles](#). In short, it can be seen as a set of relations of the form:

State(S) x Event(E) -> Actions (A), State(S')

These relations are interpreted as meaning:

If we are in state S and the event E occurs, we should perform the actions A and make a transition to the state S'.

While the Scala programming language enables the formulation of a nice internal DSL (domain specific language) for formulating finite state machines (see *fsm-scala*), Java's verbosity does not lend itself well to the same approach. This chapter describes ways to effectively achieve the same separation of concerns through self-discipline.

3.7.2 How State should be Handled

All mutable fields (or transitively mutable data structures) referenced by the FSM actor's implementation should be collected in one place and only mutated using a small well-defined set of methods. One way to achieve this is to assemble all mutable state in a superclass which keeps it private and offers protected methods for mutating it.

```
import java.util.ArrayList;
import java.util.List;
import akka.actor.ActorRef;
```

```

public abstract class MyFSMBase extends UntypedActor {

    /*
     * This is the mutable state of this state machine.
     */
    protected enum State {
        IDLE, ACTIVE;
    }

    private State state = State.IDLE;
    private ActorRef target;
    private List<Object> queue;

    /*
     * Then come all the mutator methods:
     */
    protected void init(ActorRef target) {
        this.target = target;
        queue = new ArrayList<Object>();
    }

    protected void setState(State s) {
        if (state != s) {
            transition(state, s);
            state = s;
        }
    }

    protected void enqueue(Object o) {
        if (queue != null)
            queue.add(o);
    }

    protected List<Object> drainQueue() {
        final List<Object> q = queue;
        if (q == null)
            throw new IllegalStateException("drainQueue(): not yet initialized");
        queue = new ArrayList<Object>();
        return q;
    }

    /*
     * Here are the interrogation methods:
     */
    protected boolean isInitialized() {
        return target != null;
    }

    protected State getState() {
        return state;
    }

    protected ActorRef getTarget() {
        if (target == null)
            throw new IllegalStateException("getTarget(): not yet initialized");
        return target;
    }

    /*
     * And finally the callbacks (only one in this example: react to state change)
     */
    abstract protected void transition(State old, State next);
}

```

The benefit of this approach is that state changes can be acted upon in one central place, which makes it impossible to forget inserting code for reacting to state transitions when adding to the FSM's machinery.

3.7.3 Message Buncher Example

The base class shown above is designed to support a similar example as for the Scala FSM documentation: an actor which receives and queues messages, to be delivered in batches to a configurable target actor. The messages involved are:

```
public final class SetTarget {
    final ActorRef ref;

    public SetTarget(ActorRef ref) {
        this.ref = ref;
    }
}

public final class Queue {
    final Object o;

    public Queue(Object o) {
        this.o = o;
    }
}

public final Object flush = new Object();

public final class Batch {
    final List<Object> objects;

    public Batch(List<Object> objects) {
        this.objects = objects;
    }
}
```

This actor has only the two states IDLE and ACTIVE, making their handling quite straight-forward in the concrete actor derived from the base class:

```
import akka.event.LoggingAdapter;
import akka.event.Logging;
import akka.actor.UntypedActor;

public class MyFSM extends MyFSMBase {

    private final LoggingAdapter log =
        Logging.getLogger(getContext().system(), this);

    @Override
    public void onReceive(Object o) {

        if (getState() == State.IDLE) {

            if (o instanceof SetTarget)
                init(((SetTarget) o).ref);

            else
                whenUnhandled(o);

        } else if (getState() == State.ACTIVE) {

            if (o == flush)
                setState(State.IDLE);
        }
    }
}
```

```

        else
            whenUnhandled(o);
    }
}

@Override
public void transition(State old, State next) {
    if (old == State.ACTIVE) {
        getTarget().tell(new Batch(drainQueue()), getSelf());
    }
}

private void whenUnhandled(Object o) {
    if (o instanceof Queue && isInitialized()) {
        enqueue(((Queue) o).o);
        setState(State.ACTIVE);
    } else {
        log.warning("received unknown message {} in state {}", o, getState());
    }
}
}
}

```

The trick here is to factor out common functionality like `whenUnhandled` and `transition` in order to obtain a few well-defined points for reacting to change or insert logging.

3.7.4 State-Centric vs. Event-Centric

In the example above, the subjective complexity of state and events was roughly equal, making it a matter of taste whether to choose primary dispatch on either; in the example a state-based dispatch was chosen. Depending on how evenly the matrix of possible states and events is populated, it may be more practical to handle different events first and distinguish the states in the second tier. An example would be a state machine which has a multitude of internal states but handles only very few distinct events.

3.8 Testing Actor Systems

As with any piece of software, automated tests are a very important part of the development cycle. The actor model presents a different view on how units of code are delimited and how they interact, which has an influence on how to perform tests.

Note: Due to the conciseness of test DSLs available for Scala ([ScalaTest](#), [Specs2](#), [ScalaCheck](#)), it may be a good idea to write the test suite in that language even if the main project is written in Java. If that is not desirable, you can also use `TestKit` and friends from Java, albeit with more verbose syntax which is covered below. Munish Gupta has [published a nice post](#) showing several patterns you may find useful.

Akka comes with a dedicated module `akka-testkit` for supporting tests at different levels, which fall into two clearly distinct categories:

- Testing isolated pieces of code without involving the actor model, meaning without multiple threads; this implies completely deterministic behavior concerning the ordering of events and no concurrency concerns and will be called **Unit Testing** in the following.
- Testing (multiple) encapsulated actors including multi-threaded scheduling; this implies non-deterministic order of events but shielding from concurrency concerns by the actor model and will be called **Integration Testing** in the following.

There are of course variations on the granularity of tests in both categories, where unit testing reaches down to white-box tests and integration testing can encompass functional tests of complete actor networks. The important

distinction lies in whether concurrency concerns are part of the test or not. The tools offered are described in detail in the following sections.

Note: Be sure to add the module `akka-testkit` to your dependencies.

3.8.1 Synchronous Unit Testing with `TestActorRef`

Testing the business logic inside `Actor` classes can be divided into two parts: first, each atomic operation must work in isolation, then sequences of incoming events must be processed correctly, even in the presence of some possible variability in the ordering of events. The former is the primary use case for single-threaded unit testing, while the latter can only be verified in integration tests.

Normally, the `ActorRef` shields the underlying `Actor` instance from the outside, the only communications channel is the actor's mailbox. This restriction is an impediment to unit testing, which led to the inception of the `TestActorRef`. This special type of reference is designed specifically for test purposes and allows access to the actor in two ways: either by obtaining a reference to the underlying actor instance, or by invoking or querying the actor's behaviour (`receive`). Each one warrants its own section below.

Obtaining a Reference to an Actor

Having access to the actual `Actor` object allows application of all traditional unit testing techniques on the contained methods. Obtaining a reference is done like this:

```
static class MyActor extends UntypedActor {
  public void onReceive(Object o) throws Exception {
    if (o.equals("say42")) {
      getSender().tell(42, getSelf());
    } else if (o instanceof Exception) {
      throw (Exception) o;
    }
  }
  public boolean testMe() { return true; }
}

@Test
public void demonstrateTestActorRef() {
  final Props props = Props.create(MyActor.class);
  final TestActorRef<MyActor> ref = TestActorRef.create(system, props, "testA");
  final MyActor actor = ref.underlyingActor();
  assertTrue(actor.testMe());
}
```

Since `TestActorRef` is generic in the actor type it returns the underlying actor with its proper static type. From this point on you may bring any unit testing tool to bear on your actor as usual.

Testing the Actor's Behavior

When the dispatcher invokes the processing behavior of an actor on a message, it actually calls `apply` on the current behavior registered for the actor. This starts out with the return value of the declared `receive` method, but it may also be changed using `become` and `unbecome` in response to external messages. All of this contributes to the overall actor behavior and it does not lend itself to easy testing on the `Actor` itself. Therefore the `TestActorRef` offers a different mode of operation to complement the `Actor` testing: it supports all operations also valid on normal `ActorRef`. Messages sent to the actor are processed synchronously on the current thread and answers may be sent back as usual. This trick is made possible by the `CallingThreadDispatcher` described below (see [CallingThreadDispatcher](#)); this dispatcher is set implicitly for any actor instantiated into a `TestActorRef`.

```
final Props props = Props.create(MyActor.class);
final TestActorRef<MyActor> ref = TestActorRef.create(system, props, "testB");
final Future<Object> future = akka.pattern.Patterns.ask(ref, "say42", 3000);
assertTrue(future.isCompleted());
assertEquals(42, Await.result(future, Duration.Zero()));
```

As the `TestActorRef` is a subclass of `LocalActorRef` with a few special extras, also aspects like supervision and restarting work properly, but beware that execution is only strictly synchronous as long as all actors involved use the `CallingThreadDispatcher`. As soon as you add elements which include more sophisticated scheduling you leave the realm of unit testing as you then need to think about asynchronicity again (in most cases the problem will be to wait until the desired effect had a chance to happen).

One more special aspect which is overridden for single-threaded tests is the `receiveTimeout`, as including that would entail asynchronous queuing of `ReceiveTimeout` messages, violating the synchronous contract.

Note: To summarize: `TestActorRef` overwrites two fields: it sets the dispatcher to `CallingThreadDispatcher.global` and it sets the `receiveTimeout` to `None`.

The Way In-Between: Expecting Exceptions

If you want to test the actor behavior, including hotswapping, but without involving a dispatcher and without having the `TestActorRef` swallow any thrown exceptions, then there is another mode available for you: just use the `receive` method `TestActorRef`, which will be forwarded to the underlying actor:

```
final Props props = Props.create(MyActor.class);
final TestActorRef<MyActor> ref = TestActorRef.create(system, props, "myActor");
try {
  ref.receive(new Exception("expected"));
  fail("expected an exception to be thrown");
} catch (Exception e) {
  assertEquals("expected", e.getMessage());
}
```

Use Cases

You may of course mix and match both modi operandi of `TestActorRef` as suits your test needs:

- one common use case is setting up the actor into a specific internal state before sending the test message
- another is to verify correct internal state transitions after having sent the test message

Feel free to experiment with the possibilities, and if you find useful patterns, don't hesitate to let the Akka forums know about them! Who knows, common operations might even be worked into nice DSLs.

3.8.2 Asynchronous Integration Testing with `JavaTestKit`

When you are reasonably sure that your actor's business logic is correct, the next step is verifying that it works correctly within its intended environment. The definition of the environment depends of course very much on the problem at hand and the level at which you intend to test, ranging for functional/integration tests to full system tests. The minimal setup consists of the test procedure, which provides the desired stimuli, the actor under test, and an actor receiving replies. Bigger systems replace the actor under test with a network of actors, apply stimuli at varying injection points and arrange results to be sent from different emission points, but the basic principle stays the same in that a single procedure drives the test.

The `JavaTestKit` class contains a collection of tools which makes this common task easy.

```
import org.junit.AfterClass;
import org.junit.Assert;
import org.junit.BeforeClass;
```

```

import org.junit.Test;

import akka.actor.ActorRef;
import akka.actor.ActorSystem;
import akka.actor.Props;
import akka.actor.UntypedActor;
import akka.testkit.JavaTestKit;
import scala.concurrent.duration.Duration;

public class TestKitSampleTest {

    public static class SomeActor extends UntypedActor {
        ActorRef target = null;

        public void onReceive(Object msg) {

            if (msg.equals("hello")) {
                getSender().tell("world", getSelf());
                if (target != null) target.forward(msg, getContext());
            } else if (msg instanceof ActorRef) {
                target = (ActorRef) msg;
                getSender().tell("done", getSelf());
            }
        }
    }

    static ActorSystem system;

    @BeforeClass
    public static void setup() {
        system = ActorSystem.create();
    }

    @AfterClass
    public static void teardown() {
        JavaTestKit.shutdownActorSystem(system);
        system = null;
    }

    @Test
    public void testIt() {
        /*
         * Wrap the whole test procedure within a testkit constructor
         * if you want to receive actor replies or use Within(), etc.
         */
        new JavaTestKit(system) {{
            final Props props = Props.create(SomeActor.class);
            final ActorRef subject = system.actorOf(props);

            // can also use JavaTestKit "from the outside"
            final JavaTestKit probe = new JavaTestKit(system);
            // "inject" the probe by passing it to the test subject
            // like a real resource would be passed in production
            subject.tell(probe.getRef(), getRef());
            // await the correct response
            expectMsgEquals(duration("1 second"), "done");

            // the run() method needs to finish within 3 seconds
            new Within(duration("3 seconds")) {
                protected void run() {

                    subject.tell("hello", getRef());
                }
            };
        }};
    }
}

```

```

// This is a demo: would normally use expectMsgEquals().
// Wait time is bounded by 3-second deadline above.
new AwaitCond() {
  protected boolean cond() {
    return probe.msgAvailable();
  }
};

// response must have been enqueued to us before probe
expectMsgEquals(Duration.Zero(), "world");
// check that the probe we injected earlier got the msg
probe.expectMsgEquals(Duration.Zero(), "hello");
Assert.assertEquals(getRef(), probe.getLastSender());

// Will wait for the rest of the 3 seconds
expectNoMsg();
}
};
});
}
}

```

The `JavaTestKit` contains an actor named `testActor` which is the entry point for messages to be examined with the various `expectMsg...` assertions detailed below. The test actor's reference is obtained using the `getRef` method as demonstrated above. The `testActor` may also be passed to other actors as usual, usually subscribing it as notification listener. There is a whole set of examination methods, e.g. receiving all consecutive messages matching certain criteria, receiving a whole sequence of fixed messages or classes, receiving nothing for some time, etc.

The `ActorSystem` passed in to the constructor of `JavaTestKit` is accessible via the `getSystem` method.

Note: Remember to shut down the actor system after the test is finished (also in case of failure) so that all actors—including the test actor—are stopped.

Built-In Assertions

The above mentioned `expectMsgEquals` is not the only method for formulating assertions concerning received messages, the full set is this:

```

final String hello = expectMsgEquals("hello");
final Object any = expectMsgAnyOf("hello", "world");
final Object[] all = expectMsgAllOf("hello", "world");
final int i = expectMsgClass(Integer.class);
final Number j = expectMsgAnyClassOf(Integer.class, Long.class);
expectNoMsg();
final Object[] two = receiveN(2);

```

In these examples, the maximum durations you will find mentioned below are left out, in which case they use the default value from configuration item `akka.test.single-expect-default` which itself defaults to 3 seconds (or they obey the innermost enclosing `Within` as detailed *below*). The full signatures are:

- `public <T> T expectMsgEquals(Duration max, T msg)`
The given message object must be received within the specified time; the object will be returned.
- `public Object expectMsgAnyOf(Duration max, Object... msg)`
An object must be received within the given time, and it must be equal (compared with `equals()`) to at least one of the passed reference objects; the received object will be returned.
- `public Object[] expectMsgAllOf(Duration max, Object... msg)`

A number of objects matching the size of the supplied object array must be received within the given time, and for each of the given objects there must exist at least one among the received ones which equals it (compared with `equals()`). The full sequence of received objects is returned in the order received.

- `public <T> T expectMsgClass(Duration max, Class<T> c)`

An object which is an instance of the given `Class` must be received within the allotted time frame; the object will be returned. Note that this does a conformance check, if you need the class to be equal you need to verify that afterwards.

- `public <T> T expectMsgAnyClassOf(Duration max, Class<? extends T>... c)`

An object must be received within the given time, and it must be an instance of at least one of the supplied `Class` objects; the received object will be returned. Note that this does a conformance check, if you need the class to be equal you need to verify that afterwards.

Note: Because of a limitation in Java's type system it may be necessary to add `@SuppressWarnings("unchecked")` when using this method.

- `public void expectNoMsg(Duration max)`

No message must be received within the given time. This also fails if a message has been received before calling this method which has not been removed from the queue using one of the other methods.

- `Object[] receiveN(int n, Duration max)`

`n` messages must be received within the given time; the received messages are returned.

For cases which require more refined conditions there are constructs which take code blocks:

- **ExpectMsg<T>**

```
new JavaTestKit(system) {{
  getRef().tell(42, ActorRef.noSender());
  final String out = new ExpectMsg<String>("match hint") {
    // do not put code outside this method, will run afterwards
    protected String match(Object in) {
      if (in instanceof Integer) {
        return "match";
      } else {
        throw noMatch();
      }
    }
  }.get(); // this extracts the received message
  assertEquals("match", out);
}};
```

The `match(Object in)` method will be evaluated once a message has been received within the allotted time (which may be given as constructor argument). If it throws `noMatch()` (where it is sufficient to call that method; the `throw` keyword is only needed in cases where the compiler would otherwise complain about wrong return types—Java is lacking Scala's notion of a type which signifies “will not ever return normally”), then the expectation fails with an `AssertionError`, otherwise the matched and possibly transformed object is stored for retrieval using the `get` method.

- **ReceiveWhile<T>**

```
new JavaTestKit(system) {{
  getRef().tell(42, ActorRef.noSender());
  getRef().tell(43, ActorRef.noSender());
  getRef().tell("hello", ActorRef.noSender());
  final String[] out =
    new ReceiveWhile<String>(String.class, duration("1 second")) {
    // do not put code outside this method, will run afterwards
    protected String match(Object in) {
      if (in instanceof Integer) {
        return in.toString();
      }
    }
  }.get();
}};
```

```

    } else {
        throw noMatch();
    }
}
}.get(); // this extracts the received messages
assertArrayEquals(new String[] {"42", "43"}, out);
expectMsgEquals("hello");
});

```

This construct works like `ExpectMsg`, but it continually collects messages as long as they match the criteria, and it does not fail when a non-matching one is encountered. Collecting messages also ends when the time is up, when too much time passes between messages or when enough messages have been received.

```

new ReceiveWhile<String>( // type of array to be created must match ...
    String.class, // ... this class which is needed to that end
    duration("100 millis"), // maximum collect time
    duration("50 millis"), // maximum time between messages
    12 // maximum number of messages to collect
) {
    // match elided ...
};

```

The need to specify the `String` result type twice results from the need to create a correctly typed array and Java's inability to infer the class's type argument.

- **AwaitCond**

```

new JavaTestKit(system) {{
    getRef().tell(42, ActorRef.noSender());
    new AwaitCond(
        duration("1 second"), // maximum wait time
        duration("100 millis") // interval at which to check the condition
    ) {
        // do not put code outside this method, will run afterwards
        protected boolean cond() {
            // typically used to wait for something to start up
            return msgAvailable();
        }
    };
}};

```

This general construct is not connected with the test kit's message reception, the embedded condition can compute the boolean result from anything in scope.

- **AwaitAssert**

```

new JavaTestKit(system) {{
    getRef().tell(42, ActorRef.noSender());
    new AwaitAssert(
        duration("1 second"), // maximum wait time
        duration("100 millis") // interval at which to check the condition
    ) {
        // do not put code outside this method, will run afterwards
        protected void check() {
            assertEquals(msgAvailable(), true);
        }
    };
}};

```

This general construct is not connected with the test kit's message reception, the embedded assert can check anything in scope.

There are also cases where not all messages sent to the test kit are actually relevant to the test, but removing them would mean altering the actors under test. For this purpose it is possible to ignore certain messages:

- **IgnoreMsg**

```
new JavaTestKit(system) {{
  // ignore all Strings
  new IgnoreMsg() {
    protected boolean ignore(Object msg) {
      return msg instanceof String;
    }
  };
  getRef().tell("hello", ActorRef.noSender());
  getRef().tell(42, ActorRef.noSender());
  expectMsgEquals(42);
  // remove message filter
  ignoreNoMsg();
  getRef().tell("hello", ActorRef.noSender());
  expectMsgEquals("hello");
}};
```

Expecting Log Messages

Since an integration test does not allow to the internal processing of the participating actors, verifying expected exceptions cannot be done directly. Instead, use the logging system for this purpose: replacing the normal event handler with the `TestEventListener` and using an `EventFilter` allows assertions on log messages, including those which are generated by exceptions:

```
new JavaTestKit(system) {{
  assertEquals("TestKitDocTest", system.name());
  final ActorRef victim = system.actorOf(Props.empty(), "victim");

  final int result = new EventFilter<Integer>(ActorKilledException.class) {
    protected Integer run() {
      victim.tell(Kill.getInstance(), ActorRef.noSender());
      return 42;
    }
  }.from("akka://TestKitDocTest/user/victim").occurrences(1).exec();

  assertEquals(42, result);
}};
```

If a number of occurrences is specific—as demonstrated above—then `exec()` will block until that number of matching messages have been received or the timeout configured in `akka.test.filter-leeway` is used up (time starts counting after the `run()` method returns). In case of a timeout the test fails.

Note: Be sure to exchange the default logger with the `TestEventListener` in your `application.conf` to enable this function:

```
akka.loggers = [akka.testkit.TestEventListener]
```

Timing Assertions

Another important part of functional testing concerns timing: certain events must not happen immediately (like a timer), others need to happen before a deadline. Therefore, all examination methods accept an upper time limit within the positive or negative result must be obtained. Lower time limits need to be checked external to the examination, which is facilitated by a new construct for managing time constraints:

```
new JavaTestKit(system) {{
  getRef().tell(42, ActorRef.noSender());
  new Within(Duration.Zero(), Duration.create(1, "second")) {
    // do not put code outside this method, will run afterwards
    public void run() {
```

```

    assertEquals((Integer) 42, expectMsgClass(Integer.class));
  }
};
});

```

The block in `Within.run` must complete after a *Duration* which is between `min` and `max`, where the former defaults to zero. The deadline calculated by adding the `max` parameter to the block's start time is implicitly available within the block to all examination methods, if you do not specify it, it is inherited from the innermost enclosing `within` block.

It should be noted that if the last message-receiving assertion of the block is `expectNoMsg` or `receiveWhile`, the final check of the `within` is skipped in order to avoid false positives due to wake-up latencies. This means that while individual contained assertions still use the maximum time bound, the overall block may take arbitrarily longer in this case.

Note: All times are measured using `System.nanoTime`, meaning that they describe wall time, not CPU time or system time.

Accounting for Slow Test Systems

The tight timeouts you use during testing on your lightning-fast notebook will invariably lead to spurious test failures on the heavily loaded Jenkins server (or similar). To account for this situation, all maximum durations are internally scaled by a factor taken from the *Configuration*, `akka.test.timefactor`, which defaults to 1.

You can scale other durations with the same factor by using the implicit conversion in `akka.testkit` package object to add `dilated` function to `Duration`.

```

new JavaTestKit(system) {{
  final Duration original = duration("1 second");
  final Duration stretched = dilated(original);
  assertTrue("dilated", stretched.gteq(original));
}};

```

Using Multiple Probe Actors

When the actors under test are supposed to send various messages to different destinations, it may be difficult distinguishing the message streams arriving at the `testActor` when using the `JavaTestKit` as shown until now. Another approach is to use it for creation of simple probe actors to be inserted in the message flows. The functionality is best explained using a small example:

```

new JavaTestKit(system) {{
  // simple actor which just forwards messages
  class Forwarder extends UntypedActor {
    final ActorRef target;
    @SuppressWarnings("unused")
    public Forwarder(ActorRef target) {
      this.target = target;
    }
    public void onReceive(Object msg) {
      target.forward(msg, getContext());
    }
  }

  // create a test probe
  final JavaTestKit probe = new JavaTestKit(system);

  // create a forwarder, injecting the probe's testActor
  final Props props = Props.create(Forwarder.class, this, probe.getRef());
  final ActorRef forwarder = system.actorOf(props, "forwarder");
}
}

```

```
// verify correct forwarding
forwarder.tell(42, getRef());
probe.expectMsgEquals(42);
assertEquals(getRef(), probe.getLastSender());
}};
```

This simple test verifies an equally simple Forwarder actor by injecting a probe as the forwarder's target. Another example would be two actors A and B which collaborate by A sending messages to B. In order to verify this message flow, a TestProbe could be inserted as target of A, using the forwarding capabilities or auto-pilot described below to include a real B in the test setup.

Probes may also be equipped with custom assertions to make your test code even more concise and clear:

```
new JavaTestKit(system) {{
  class MyProbe extends JavaTestKit {
    public MyProbe() {
      super(system);
    }
    public void assertHello() {
      expectMsgEquals("hello");
    }
  }

  final MyProbe probe = new MyProbe();
  probe.getRef().tell("hello", ActorRef.noSender());
  probe.assertHello();
}};
```

You have complete flexibility here in mixing and matching the JavaTestKit facilities with your own checks and choosing an intuitive name for it. In real life your code will probably be a bit more complicated than the example given above; just use the power!

Warning: Any message send from a TestProbe to another actor which runs on the CallingThreadDispatcher runs the risk of dead-lock, if that other actor might also send to this probe. The implementation of TestProbe.watch and TestProbe.unwatch will also send a message to the watchee, which means that it is dangerous to try watching e.g. TestActorRef from a TestProbe.

Watching Other Actors from Probes

A JavaTestKit can register itself for DeathWatch of any other actor:

```
new JavaTestKit(system) {{
  final JavaTestKit probe = new JavaTestKit(system);
  probe.watch(target);
  target.tell(PoisonPill.getInstance(), ActorRef.noSender());
  final Terminated msg = probe.expectMsgClass(Terminated.class);
  assertEquals(msg.getActor(), target);
}};
```

Replying to Messages Received by Probes

The probe stores the sender of the last dequeued message (i.e. after its expectMsg* reception), which may be retrieved using the getLastSender method. This information can also implicitly be used for having the probe reply to the last received message:

```
new JavaTestKit(system) {{
  final JavaTestKit probe = new JavaTestKit(system);
  probe.getRef().tell("hello", getRef());
  probe.expectMsgEquals("hello");
}};
```

```
probe.reply("world");
expectMsgEquals("world");
assertEquals(probe.getRef(), getLastSender());
}};
```

Forwarding Messages Received by Probes

The probe can also forward a received message (i.e. after its `expectMsg*` reception), retaining the original sender:

```
new JavaTestKit(system) {{
  final JavaTestKit probe = new JavaTestKit(system);
  probe.getRef().tell("hello", getRef());
  probe.expectMsgEquals("hello");
  probe.forward(getRef());
  expectMsgEquals("hello");
  assertEquals(getRef(), getLastSender());
}};
```

Auto-Pilot

Receiving messages in a queue for later inspection is nice, but in order to keep a test running and verify traces later you can also install an `AutoPilot` in the participating test probes (actually in any `TestKit`) which is invoked before enqueueing to the inspection queue. This code can be used to forward messages, e.g. in a chain `A --> Probe --> B`, as long as a certain protocol is obeyed.

```
new JavaTestKit(system) {{
  final JavaTestKit probe = new JavaTestKit(system);
  // install auto-pilot
  probe.setAutoPilot(new TestActor.AutoPilot() {
    public AutoPilot run(ActorRef sender, Object msg) {
      sender.tell(msg, ActorRef.noSender());
      return noAutoPilot();
    }
  });
  // first one is replied to directly ...
  probe.getRef().tell("hello", getRef());
  expectMsgEquals("hello");
  // ... but then the auto-pilot switched itself off
  probe.getRef().tell("world", getRef());
  expectNoMsg();
}};
```

The `run` method must return the auto-pilot for the next message, wrapped in an `Option`; setting it to `None` terminates the auto-pilot.

Caution about Timing Assertions

The behavior of `within` blocks when using test probes might be perceived as counter-intuitive: you need to remember that the nicely scoped deadline as described *above* is local to each probe. Hence, probes do not react to each other's deadlines or to the deadline set in an enclosing `JavaTestKit` instance:

```
new JavaTestKit(system) {{
  final JavaTestKit probe = new JavaTestKit(system);
  new Within(duration("1 second")) {
    public void run() {
      probe.expectMsgEquals("hello");
    }
  }
}};
```

```
};
});
```

Here, the `expectMsgEquals` call will use the default timeout.

3.8.3 CallingThreadDispatcher

The `CallingThreadDispatcher` serves good purposes in unit testing, as described above, but originally it was conceived in order to allow contiguous stack traces to be generated in case of an error. As this special dispatcher runs everything which would normally be queued directly on the current thread, the full history of a message's processing chain is recorded on the call stack, so long as all intervening actors run on this dispatcher.

How to use it

Just set the dispatcher as you normally would:

```
system.actorOf(
  Props.create(MyActor.class)
    .withDispatcher(CallingThreadDispatcher.Id()));
```

How it works

When receiving an invocation, the `CallingThreadDispatcher` checks whether the receiving actor is already active on the current thread. The simplest example for this situation is an actor which sends a message to itself. In this case, processing cannot continue immediately as that would violate the actor model, so the invocation is queued and will be processed when the active invocation on that actor finishes its processing; thus, it will be processed on the calling thread, but simply after the actor finishes its previous work. In the other case, the invocation is simply processed immediately on the current thread. Futures scheduled via this dispatcher are also executed immediately.

This scheme makes the `CallingThreadDispatcher` work like a general purpose dispatcher for any actors which never block on external events.

In the presence of multiple threads it may happen that two invocations of an actor running on this dispatcher happen on two different threads at the same time. In this case, both will be processed directly on their respective threads, where both compete for the actor's lock and the loser has to wait. Thus, the actor model is left intact, but the price is loss of concurrency due to limited scheduling. In a sense this is equivalent to traditional mutex style concurrency.

The other remaining difficulty is correct handling of suspend and resume: when an actor is suspended, subsequent invocations will be queued in thread-local queues (the same ones used for queuing in the normal case). The call to `resume`, however, is done by one specific thread, and all other threads in the system will probably not be executing this specific actor, which leads to the problem that the thread-local queues cannot be emptied by their native threads. Hence, the thread calling `resume` will collect all currently queued invocations from all threads into its own queue and process them.

Limitations

Warning: In case the `CallingThreadDispatcher` is used for top-level actors, but without going through `TestActorRef`, then there is a time window during which the actor is awaiting construction by the user guardian actor. Sending messages to the actor during this time period will result in them being enqueued and then executed on the guardian's thread instead of the caller's thread. To avoid this, use `TestActorRef`.

If an actor's behavior blocks on something which would normally be affected by the calling actor after having sent the message, this will obviously dead-lock when using this dispatcher. This is a common scenario in actor tests based on `CountDownLatch` for synchronization:

```
val latch = new CountdownLatch(1)
actor ! startWorkAfter(latch) // actor will call latch.await() before proceeding
doSomeSetupStuff()
latch.countDown()
```

The example would hang indefinitely within the message processing initiated on the second line and never reach the fourth line, which would unblock it on a normal dispatcher.

Thus, keep in mind that the `CallingThreadDispatcher` is not a general-purpose replacement for the normal dispatchers. On the other hand it may be quite useful to run your actor network on it for testing, because if it runs without dead-locking chances are very high that it will not dead-lock in production.

Warning: The above sentence is unfortunately not a strong guarantee, because your code might directly or indirectly change its behavior when running on a different dispatcher. If you are looking for a tool to help you debug dead-locks, the `CallingThreadDispatcher` may help with certain error scenarios, but keep in mind that it has may give false negatives as well as false positives.

Thread Interruptions

If the `CallingThreadDispatcher` sees that the current thread has its `isInterrupted()` flag set when message processing returns, it will throw an `InterruptedException` after finishing all its processing (i.e. all messages which need processing as described above are processed before this happens). As `tell` cannot throw exceptions due to its contract, this exception will then be caught and logged, and the thread's interrupted status will be set again.

If during message processing an `InterruptedException` is thrown then it will be caught inside the `CallingThreadDispatcher`'s message handling loop, the thread's interrupted flag will be set and processing continues normally.

Note: The summary of these two paragraphs is that if the current thread is interrupted while doing work under the `CallingThreadDispatcher`, then that will result in the `isInterrupted` flag to be `true` when the message send returns and no `InterruptedException` will be thrown.

Benefits

To summarize, these are the features with the `CallingThreadDispatcher` has to offer:

- Deterministic execution of single-threaded tests while retaining nearly full actor semantics
- Full message processing history leading up to the point of failure in exception stack traces
- Exclusion of certain classes of dead-lock scenarios

3.8.4 Tracing Actor Invocations

The testing facilities described up to this point were aiming at formulating assertions about a system's behavior. If a test fails, it is usually your job to find the cause, fix it and verify the test again. This process is supported by debuggers as well as logging, where the Akka toolkit offers the following options:

- *Logging of exceptions thrown within Actor instances*

This is always on; in contrast to the other logging mechanisms, this logs at `ERROR` level.

- *Logging of special messages*

Actors handle certain special messages automatically, e.g. `Kill`, `PoisonPill`, etc. Tracing of these message invocations is enabled by the setting `akka.actor.debug.autoreceive`, which enables this on all actors.

- *Logging of the actor lifecycle*

Actor creation, start, restart, monitor start, monitor stop and stop may be traced by enabling the setting `akka.actor.debug.lifecycle`; this, too, is enabled uniformly on all actors.

All these messages are logged at `DEBUG` level. To summarize, you can enable full logging of actor activities using this configuration fragment:

```
akka {
  loglevel = "DEBUG"
  actor {
    debug {
      autoreceive = on
      lifecycle = on
    }
  }
}
```

FUTURES AND AGENTS

4.1 Futures

4.1.1 Introduction

In the Scala Standard Library, a `Future` is a data structure used to retrieve the result of some concurrent operation. This result can be accessed synchronously (blocking) or asynchronously (non-blocking). To be able to use this from Java, Akka provides a java friendly interface in `akka.dispatch.Futures`.

4.1.2 Execution Contexts

In order to execute callbacks and operations, Futures need something called an `ExecutionContext`, which is very similar to a `java.util.concurrent.Executor`. If you have an `ActorSystem` in scope, it will use its default dispatcher as the `ExecutionContext`, or you can use the factory methods provided by the `ExecutionContexts` class to wrap `Executors` and `ExecutorServices`, or even create your own.

```
import akka.dispatch.*;
import scala.concurrent.ExecutionContext;
import scala.concurrent.Future;
import scala.concurrent.Await;
import scala.concurrent.Promise;
import akka.util.Timeout;
import scala.concurrent.ExecutionContext;
import scala.concurrent.ExecutionContext$;
```

```
ExecutionContext ec =
    ExecutionContexts.fromExecutorService(yourExecutorServiceGoesHere);

//Use ec with your Futures
Future<String> f1 = Futures.successful("foo");

// Then you shut down the ExecutorService at the end of your application.
yourExecutorServiceGoesHere.shutdown();
```

4.1.3 Use with Actors

There are generally two ways of getting a reply from an `UntypedActor`: the first is by a sent message (`actorRef.tell(msg, sender)`), which only works if the original sender was an `UntypedActor` and the second is through a `Future`.

Using the `ActorRef`'s `ask` method to send a message will return a `Future`. To wait for and retrieve the actual result the simplest method is:

```
import akka.dispatch.*;
import scala.concurrent.ExecutionContext;
```

```
import scala.concurrent.Future;
import scala.concurrent.Await;
import scala.concurrent.Promise;
import akka.util.Timeout;
```

```
Timeout timeout = new Timeout(Duration.create(5, "seconds"));
Future<Object> future = Patterns.ask(actor, msg, timeout);
String result = (String) Await.result(future, timeout.duration());
```

This will cause the current thread to block and wait for the `UntypedActor` to ‘complete’ the `Future` with its reply. Blocking is discouraged though as it can cause performance problem. The blocking operations are located in `Await.result` and `Await.ready` to make it easy to spot where blocking occurs. Alternatives to blocking are discussed further within this documentation. Also note that the `Future` returned by an `UntypedActor` is a `Future<Object>` since an `UntypedActor` is dynamic. That is why the cast to `String` is used in the above sample.

Warning: `Await.result` and `Await.ready` are provided for exceptional situations where you **must** block, a good rule of thumb is to only use them if you know why you **must** block. For all other cases, use asynchronous composition as described below.

To send the result of a `Future` to an `Actor`, you can use the pipe construct:

```
akka.pattern.Patterns.pipe(future, system.dispatcher()).to(actor);
```

4.1.4 Use Directly

A common use case within Akka is to have some computation performed concurrently without needing the extra utility of an `UntypedActor`. If you find yourself creating a pool of `UntypedActors` for the sole reason of performing a calculation in parallel, there is an easier (and faster) way:

```
import scala.concurrent.duration.Duration;
import akka.japi.Function;
import java.util.concurrent.Callable;
import static akka.dispatch.Futures.future;
import static java.util.concurrent.TimeUnit.SECONDS;
```

```
Future<String> f = future(new Callable<String>() {
    public String call() {
        return "Hello" + "World";
    }
}, system.dispatcher());

f onSuccess(new PrintResult<String>(), system.dispatcher());
```

In the above code the block passed to `future` will be executed by the default `Dispatcher`, with the return value of the block used to complete the `Future` (in this case, the result would be the string: “HelloWorld”). Unlike a `Future` that is returned from an `UntypedActor`, this `Future` is properly typed, and we also avoid the overhead of managing an `UntypedActor`.

You can also create already completed `Futures` using the `Futures` class, which can be either successes:

```
Future<String> future = Futures.successful("Yay!");
```

Or failures:

```
Future<String> otherFuture = Futures.failed(
    new IllegalArgumentException("Bang!"));
```

It is also possible to create an empty `Promise`, to be filled later, and obtain the corresponding `Future`:

```
Promise<String> promise = Futures.promise();
Future<String> theFuture = promise.future();
promise.success("hello");
```

For these examples `PrintResult` is defined as follows:

```
public final static class PrintResult<T> extends OnSuccess<T> {
    @Override public final void onSuccess(T t) {
        System.out.println(t);
    }
}
```

4.1.5 Functional Futures

Scala's `Future` has several monadic methods that are very similar to the ones used by Scala's collections. These allow you to create 'pipelines' or 'streams' that the result will travel through.

Future is a Monad

The first method for working with `Future` functionally is `map`. This method takes a `Mapper` which performs some operation on the result of the `Future`, and returning a new result. The return value of the `map` method is another `Future` that will contain the new result:

```
import scala.concurrent.duration.Duration;
import akka.japi.Function;
import java.util.concurrent.Callable;
import static akka.dispatch.Futures.future;
import static java.util.concurrent.TimeUnit.SECONDS;

final ExecutionContext ec = system.dispatcher();

Future<String> f1 = future(new Callable<String>() {
    public String call() {
        return "Hello" + "World";
    }
}, ec);

Future<Integer> f2 = f1.map(new Mapper<String, Integer>() {
    public Integer apply(String s) {
        return s.length();
    }
}, ec);

f2.onSuccess(new PrintResult<Integer>(), system.dispatcher());
```

In this example we are joining two strings together within a `Future`. Instead of waiting for `f1` to complete, we apply our function that calculates the length of the string using the `map` method. Now we have a second `Future`, `f2`, that will eventually contain an `Integer`. When our original `Future`, `f1`, completes, it will also apply our function and complete the second `Future` with its result. When we finally get the result, it will contain the number 10. Our original `Future` still contains the string "HelloWorld" and is unaffected by the `map`.

Something to note when using these methods: if the `Future` is still being processed when one of these methods are called, it will be the completing thread that actually does the work. If the `Future` is already complete though, it will be run in our current thread. For example:

```
final ExecutionContext ec = system.dispatcher();

Future<String> f1 = future(new Callable<String>() {
    public String call() throws Exception {
        Thread.sleep(100);
    }
}, ec);
```

```

    return "Hello" + "World";
  }
}, ec);

Future<Integer> f2 = f1.map(new Mapper<String, Integer>() {
  public Integer apply(String s) {
    return s.length();
  }
}, ec);

f2.onSuccess(new PrintResult<Integer>(), system.dispatcher());

```

The original `Future` will take at least 0.1 second to execute now, which means it is still being processed at the time we call `map`. The function we provide gets stored within the `Future` and later executed automatically by the dispatcher when the result is ready.

If we do the opposite:

```

final ExecutionContext ec = system.dispatcher();

Future<String> f1 = future(new Callable<String>() {
  public String call() {
    return "Hello" + "World";
  }
}, ec);

// Thread.sleep is only here to prove a point
Thread.sleep(100); // Do not use this in your code

Future<Integer> f2 = f1.map(new Mapper<String, Integer>() {
  public Integer apply(String s) {
    return s.length();
  }
}, ec);

f2.onSuccess(new PrintResult<Integer>(), system.dispatcher());

```

Our little string has been processed long before our 0.1 second sleep has finished. Because of this, the dispatcher has moved onto other messages that need processing and can no longer calculate the length of the string for us, instead it gets calculated in the current thread just as if we weren't using a `Future`.

Normally this works quite well as it means there is very little overhead to running a quick function. If there is a possibility of the function taking a non-trivial amount of time to process it might be better to have this done concurrently, and for that we use `flatMap`:

```

final ExecutionContext ec = system.dispatcher();

Future<String> f1 = future(new Callable<String>() {
  public String call() {
    return "Hello" + "World";
  }
}, ec);

Future<Integer> f2 = f1.flatMap(new Mapper<String, Future<Integer>>() {
  public Future<Integer> apply(final String s) {
    return future(new Callable<Integer>() {
      public Integer call() {
        return s.length();
      }
    }, ec);
  }
}, ec);

f2.onSuccess(new PrintResult<Integer>(), system.dispatcher());

```

Now our second `Future` is executed concurrently as well. This technique can also be used to combine the results of several `Futures` into a single calculation, which will be better explained in the following sections.

If you need to do conditional propagation, you can use `filter`:

```
final ExecutionContext ec = system.dispatcher();
Future<Integer> future1 = Futures.successful(4);
Future<Integer> successfulFilter = future1.filter(Filter.filterOf(
    new Function<Integer, Boolean>() {
        public Boolean apply(Integer i) {
            return i % 2 == 0;
        }
    }
), ec);

Future<Integer> failedFilter = future1.filter(Filter.filterOf(
    new Function<Integer, Boolean>() {
        public Boolean apply(Integer i) {
            return i % 2 != 0;
        }
    }
), ec);
//When filter fails, the returned Future will be failed with a scala.MatchError
```

Composing Futures

It is very often desirable to be able to combine different `Futures` with each other, below are some examples on how that can be done in a non-blocking fashion.

```
import static akka.dispatch.Futures.sequence;

final ExecutionContext ec = system.dispatcher();
//Some source generating a sequence of Future<Integer>:s
Iterable<Future<Integer>> listOfFutureInts = source;

// now we have a Future[Iterable[Integer]]
Future<Iterable<Integer>> futureListOfInts = sequence(listOfFutureInts, ec);

// Find the sum of the odd numbers
Future<Long> futureSum = futureListOfInts.map(
    new Mapper<Iterable<Integer>, Long>() {
        public Long apply(Iterable<Integer> ints) {
            long sum = 0;
            for (Integer i : ints)
                sum += i;
            return sum;
        }
    }, ec);

futureSum.onSuccess(new PrintResult<Long>(), system.dispatcher());
```

To better explain what happened in the example, `Future.sequence` is taking the `Iterable<Future<Integer>>` and turning it into a `Future<Iterable<Integer>>`. We can then use `map` to work with the `Iterable<Integer>` directly, and we aggregate the sum of the `Iterable`.

The `traverse` method is similar to `sequence`, but it takes a sequence of `A`'s and applies a function from `A` to `Future` and returns a `Future<Iterable>`, enabling parallel map over the sequence, if you use `Futures.future` to create the `Future`.

```
import static akka.dispatch.Futures.traverse;
```

```

final ExecutionContext ec = system.dispatcher();
//Just a sequence of Strings
Iterable<String> listStrings = Arrays.asList("a", "b", "c");

Future<Iterable<String>> futureResult = traverse(listStrings,
    new Function<String, Future<String>>() {
        public Future<String> apply(final String r) {
            return future(new Callable<String>() {
                public String call() {
                    return r.toUpperCase();
                }
            }, ec);
        }
    }, ec);

//Returns the sequence of strings as upper case
futureResult onSuccess(new PrintResult<Iterable<String>>(), system.dispatcher());

```

It's as simple as that!

Then there's a method that's called `fold` that takes a start-value, a sequence of `Future`s and a function from the type of the start-value, a timeout, and the type of the futures and returns something with the same type as the start-value, and then applies the function to all elements in the sequence of futures, non-blockingly, the execution will be started when the last of the `Futures` is completed.

```

import akka.japi.Function2;
import static akka.dispatch.Futures.fold;

```

```

final ExecutionContext ec = system.dispatcher();

//A sequence of Futures, in this case Strings
Iterable<Future<String>> futures = source;

//Start value is the empty string
Future<String> resultFuture = fold("", futures,
    new Function2<String, String, String>() {
        public String apply(String r, String t) {
            return r + t; //Just concatenate
        }
    }, ec);

resultFuture onSuccess(new PrintResult<String>(), system.dispatcher());

```

That's all it takes!

If the sequence passed to `fold` is empty, it will return the start-value, in the case above, that will be empty `String`. In some cases you don't have a start-value and you're able to use the value of the first completing `Future` in the sequence as the start-value, you can use `reduce`, it works like this:

```

import static akka.dispatch.Futures.reduce;

```

```

final ExecutionContext ec = system.dispatcher();
//A sequence of Futures, in this case Strings
Iterable<Future<String>> futures = source;

Future<Object> resultFuture = reduce(futures,
    new Function2<Object, String, Object>() {
        public Object apply(Object r, String t) {
            return r + t; //Just concatenate
        }
    }, ec);

resultFuture onSuccess(new PrintResult<Object>(), system.dispatcher());

```

Same as with `fold`, the execution will be started when the last of the `Futures` is completed, you can also parallelize it by chunking your futures into sub-sequences and reduce them, and then reduce the reduced results again.

This is just a sample of what can be done.

4.1.6 Callbacks

Sometimes you just want to listen to a `Future` being completed, and react to that not by creating a new `Future`, but by side-effecting. For this Scala supports `onComplete`, `onSuccess` and `onFailure`, of which the latter two are specializations of the first.

```
final ExecutionContext ec = system.dispatcher();

future.onSuccess(new OnSuccess<String>() {
    public void onSuccess(String result) {
        if ("bar" == result) {
            //Do something if it resulted in "bar"
        } else {
            //Do something if it was some other String
        }
    }
}, ec);
```

```
final ExecutionContext ec = system.dispatcher();

future.onFailure(new OnFailure() {
    public void onFailure(Throwable failure) {
        if (failure instanceof IllegalStateException) {
            //Do something if it was this particular failure
        } else {
            //Do something if it was some other failure
        }
    }
}, ec);
```

```
final ExecutionContext ec = system.dispatcher();

future.onComplete(new OnComplete<String>() {
    public void onComplete(Throwable failure, String result) {
        if (failure != null) {
            //We got a failure, handle it here
        } else {
            // We got a result, do something with it
        }
    }
}, ec);
```

4.1.7 Ordering

Since callbacks are executed in any order and potentially in parallel, it can be tricky at the times when you need sequential ordering of operations. But there's a solution! And it's name is `andThen`, and it creates a new `Future` with the specified callback, a `Future` that will have the same result as the `Future` it's called on, which allows for ordering like in the following sample:

```
final ExecutionContext ec = system.dispatcher();
Future<String> future1 = Futures.successful("value").andThen(
    new OnComplete<String>() {
        public void onComplete(Throwable failure, String result) {
            if (failure != null)
                sendToIssueTracker(failure);
        }
    }
);
```

```

    }, ec).andThen(new OnComplete<String>() {
    public void onComplete(Throwable failure, String result) {
        if (result != null)
            sendToTheInternetz(result);
    }
    }, ec);

```

4.1.8 Auxiliary methods

Future `fallbackTo` combines 2 Futures into a new Future, and will hold the successful value of the second Future if the first Future fails.

```

Future<String> future1 = Futures.failed(new IllegalStateException("OHNOES1"));
Future<String> future2 = Futures.failed(new IllegalStateException("OHNOES2"));
Future<String> future3 = Futures.successful("bar");
// Will have "bar" in this case
Future<String> future4 = future1.fallbackTo(future2).fallbackTo(future3);
future4.onSuccess(new PrintResult<String>(), system.dispatcher());

```

You can also combine two Futures into a new Future that will hold a tuple of the two Futures successful results, using the `zip` operation.

```

final ExecutionContext ec = system.dispatcher();
Future<String> future1 = Futures.successful("foo");
Future<String> future2 = Futures.successful("bar");
Future<String> future3 = future1.zip(future2).map(
    new Mapper<scala.Tuple2<String, String>, String>() {
        public String apply(scala.Tuple2<String, String> zipped) {
            return zipped._1() + " " + zipped._2();
        }
    }, ec);

future3.onSuccess(new PrintResult<String>(), system.dispatcher());

```

4.1.9 Exceptions

Since the result of a Future is created concurrently to the rest of the program, exceptions must be handled differently. It doesn't matter if an `UntypedActor` or the dispatcher is completing the Future, if an `Exception` is caught the Future will contain it instead of a valid result. If a Future does contain an `Exception`, calling `Await.result` will cause it to be thrown again so it can be handled properly.

It is also possible to handle an `Exception` by returning a different result. This is done with the `recover` method. For example:

```

final ExecutionContext ec = system.dispatcher();

Future<Integer> future = future(new Callable<Integer>() {
    public Integer call() {
        return 1 / 0;
    }
}, ec).recover(new Recover<Integer>() {
    public Integer recover(Throwable problem) throws Throwable {
        if (problem instanceof ArithmeticException)
            return 0;
        else
            throw problem;
    }
}, ec);

future.onSuccess(new PrintResult<Integer>(), system.dispatcher());

```

In this example, if the actor replied with a `akka.actor.Status.Failure` containing the `ArithmeticException`, our `Future` would have a result of `0`. The `recover` method works very similarly to the standard `try/catch` blocks, so multiple `Exceptions` can be handled in this manner, and if an `Exception` is not handled this way it will behave as if we hadn't used the `recover` method.

You can also use the `recoverWith` method, which has the same relationship to `recover` as `flatMap` has to `map`, and is use like this:

```
final ExecutionContext ec = system.dispatcher();

Future<Integer> future = future(new Callable<Integer>() {
    public Integer call() {
        return 1 / 0;
    }
}, ec).recoverWith(new Recover<Future<Integer>>() {
    public Future<Integer> recover(Throwable problem) throws Throwable {
        if (problem instanceof ArithmeticException) {
            return future(new Callable<Integer>() {
                public Integer call() {
                    return 0;
                }
            }, ec);
        } else
            throw problem;
    }
}, ec);

future.onSuccess(new PrintResult<Integer>(), system.dispatcher());
```

4.1.10 After

`akka.pattern.Patterns.after` makes it easy to complete a `Future` with a value or exception after a timeout.

```
import static akka.pattern.Patterns.after;
import java.util.Arrays;

final ExecutionContext ec = system.dispatcher();
Future<String> failExc = Futures.failed(new IllegalStateException("OHNOES1"));
Future<String> delayed = Patterns.after(Duration.create(200, "millis"),
    system.scheduler(), ec, failExc);
Future<String> future = future(new Callable<String>() {
    public String call() throws InterruptedException {
        Thread.sleep(1000);
        return "foo";
    }
}, ec);
Future<String> result = Futures.firstCompletedOf(
    Arrays.<Future<String>>asList(future, delayed), ec);
```

4.2 Software Transactional Memory

4.2.1 Overview of STM

An *STM* turns the Java heap into a transactional data set with `begin/commit/rollback` semantics. Very much like a regular database. It implements the first three letters in *ACID*; *ACI*:

- Atomic
- Consistent

- Isolated

Generally, the STM is not needed very often when working with Akka. Some use-cases (that we can think of) are:

- When you really need composable message flows across many actors updating their **internal local** state but need them to do that atomically in one big transaction. Might not be often, but when you do need this then you are screwed without it.
- When you want to share a datastructure across actors.

The use of STM in Akka is inspired by the concepts and views in [Clojure's STM](#). Please take the time to read [this excellent document](#) about state in clojure and view [this presentation](#) by Rich Hickey (the genius behind Clojure).

4.2.2 Scala STM

The STM supported in Akka is [ScalaSTM](#) which will be soon included in the Scala standard library.

The STM is based on Transactional References (referred to as Refs). Refs are memory cells, holding an (arbitrary) immutable value, that implement CAS (Compare-And-Swap) semantics and are managed and enforced by the STM for coordinated changes across many Refs.

4.2.3 Integration with Actors

In Akka we've also integrated Actors and STM in [Agents](#) and [Transactors](#).

4.3 Agents

Agents in Akka are inspired by [agents in Clojure](#).

Agents provide asynchronous change of individual locations. Agents are bound to a single storage location for their lifetime, and only allow mutation of that location (to a new state) to occur as a result of an action. Update actions are functions that are asynchronously applied to the Agent's state and whose return value becomes the Agent's new state. The state of an Agent should be immutable.

While updates to Agents are asynchronous, the state of an Agent is always immediately available for reading by any thread (using `get`) without any messages.

Agents are reactive. The update actions of all Agents get interleaved amongst threads in an `ExecutionContext`. At any point in time, at most one `send` action for each Agent is being executed. Actions dispatched to an agent from another thread will occur in the order they were sent, potentially interleaved with actions dispatched to the same agent from other threads.

If an Agent is used within an enclosing transaction, then it will participate in that transaction. Agents are integrated with Scala STM - any dispatches made in a transaction are held until that transaction commits, and are discarded if it is retried or aborted.

4.3.1 Creating Agents

Agents are created by invoking `new Agent<ValueType>(value, executionContext)` – passing in the Agent's initial value and providing an `ExecutionContext` to be used for it:

```
import scala.concurrent.ExecutionContext;
import akka.agent.Agent;
import akka.dispatch.ExecutionContexts;
ExecutionContext ec = ExecutionContexts.global();
Agent<Integer> agent = Agent.create(5, ec);
```

4.3.2 Reading an Agent's value

Agents can be dereferenced (you can get an Agent's value) by invoking the Agent with `get ()` like this:

```
Integer result = agent.get();
```

Reading an Agent's current value does not involve any message passing and happens immediately. So while updates to an Agent are asynchronous, reading the state of an Agent is synchronous.

You can also get a `Future` to the Agents value, that will be completed after the currently queued updates have completed:

```
import scala.concurrent.Future;
Future<Integer> future = agent.future();
```

See *Futures* for more information on Futures.

4.3.3 Updating Agents (send & alter)

You update an Agent by sending a function (`akka.dispatch.Mapper`) that transforms the current value or by sending just a new value. The Agent will apply the new value or function atomically and asynchronously. The update is done in a fire-forget manner and you are only guaranteed that it will be applied. There is no guarantee of when the update will be applied but dispatches to an Agent from a single thread will occur in order. You apply a value or a function by invoking the `send` function.

```
import akka.dispatch.Mapper;
// send a value, enqueues this change
// of the value of the Agent
agent.send(7);

// send a Mapper, enqueues this change
// to the value of the Agent
agent.send(new Mapper<Integer, Integer>() {
    public Integer apply(Integer i) {
        return i * 2;
    }
});
```

You can also dispatch a function to update the internal state but on its own thread. This does not use the reactive thread pool and can be used for long-running or blocking operations. You do this with the `sendOff` method. Dispatches using either `sendOff` or `send` will still be executed in order.

```
import akka.dispatch.Mapper;
// sendOff a function
agent.sendOff(longRunningOrBlockingFunction,
              theExecutionContextToExecuteItIn);
```

All send methods also have a corresponding `alter` method that returns a `Future`. See *Futures* for more information on Futures.

```
import akka.dispatch.Mapper;
import scala.concurrent.Future;
// alter a value
Future<Integer> f1 = agent.alter(7);

// alter a function (Mapper)
Future<Integer> f2 = agent.alter(new Mapper<Integer, Integer>() {
    public Integer apply(Integer i) {
        return i * 2;
    }
});
```

```
import akka.dispatch.Mapper;
import scala.concurrent.Future;
// alterOff a function (Mapper)
Future<Integer> f3 = agent.alterOff(longRunningOrBlockingFunction,
                                theExecutionContextToExecuteItIn);
```

4.3.4 Transactional Agents

If an Agent is used within an enclosing Scala STM transaction, then it will participate in that transaction. If you send to an Agent within a transaction then the dispatch to the Agent will be held until that transaction commits, and discarded if the transaction is aborted.

4.4 Transactors

4.4.1 Why Transactors?

Actors are excellent for solving problems where you have many independent processes that can work in isolation and only interact with other Actors through message passing. This model fits many problems. But the actor model is unfortunately a terrible model for implementing truly shared state. E.g. when you need to have consensus and a stable view of state across many components. The classic example is the bank account where clients can deposit and withdraw, in which each operation needs to be atomic. For detailed discussion on the topic see [this JavaOne presentation](#).

STM on the other hand is excellent for problems where you need consensus and a stable view of the state by providing compositional transactional shared state. Some of the really nice traits of STM are that transactions compose, and it raises the abstraction level from lock-based concurrency.

Akka's Transactors combine Actors and STM to provide the best of the Actor model (concurrency and asynchronous event-based programming) and STM (compositional transactional shared state) by providing transactional, compositional, asynchronous, event-based message flows.

Generally, the STM is not needed very often when working with Akka. Some use-cases (that we can think of) are:

- When you really need composable message flows across many actors updating their **internal local** state but need them to do that atomically in one big transaction. Might not be often but when you do need this then you are screwed without it.
- When you want to share a datastructure across actors.

4.4.2 Actors and STM

You can combine Actors and STM in several ways. An Actor may use STM internally so that particular changes are guaranteed to be atomic. Actors may also share transactional datastructures as the STM provides safe shared state across threads.

It's also possible to coordinate transactions across Actors or threads so that either the transactions in a set all commit successfully or they all fail. This is the focus of Transactors and the explicit support for coordinated transactions in this section.

4.4.3 Coordinated transactions

Akka provides an explicit mechanism for coordinating transactions across actors. Under the hood it uses a `CommitBarrier`, similar to a `CountDownLatch`.

Here is an example of coordinating two simple counter `UntypedActors` so that they both increment together in coordinated transactions. If one of them was to fail to increment, the other would also fail.

```
import akka.actor.ActorRef;

public class Increment {
    private ActorRef friend = null;

    public Increment() {}

    public Increment(ActorRef friend) {
        this.friend = friend;
    }

    public boolean hasFriend() {
        return friend != null;
    }

    public ActorRef getFriend() {
        return friend;
    }
}
```

```
import akka.actor.*;
import akka.transactor.*;
import scala.concurrent.stm.Ref;
import scala.concurrent.stm.japi.STM;

public class CoordinatedCounter extends UntypedActor {
    private Ref.View<Integer> count = STM.newRef(0);

    public void onReceive(Object incoming) throws Exception {
        if (incoming instanceof Coordinated) {
            Coordinated coordinated = (Coordinated) incoming;
            Object message = coordinated.getMessage();
            if (message instanceof Increment) {
                Increment increment = (Increment) message;
                if (increment.hasFriend()) {
                    increment.getFriend().tell(
                        coordinated.coordinate(new Increment()), getSelf());
                }
                coordinated.atomic(new Runnable() {
                    public void run() {
                        STM.increment(count, 1);
                    }
                });
            }
            } else if ("GetCount".equals(incoming)) {
                getSender().tell(count.get(), getSelf());
            } else {
                unhandled(incoming);
            }
        }
    }
}
```

```
import akka.actor.*;
import scala.concurrent.Await;
import static akka.pattern.Patterns.ask;
import akka.transactor.Coordinated;
import akka.util.Timeout;
import static java.util.concurrent.TimeUnit.SECONDS;
```

```
ActorSystem system = ActorSystem.create("CoordinatedExample");
```

```
ActorRef counter1 = system.actorOf(Props.create(CoordinatedCounter.class));
ActorRef counter2 = system.actorOf(Props.create(CoordinatedCounter.class));
```

```
Timeout timeout = new Timeout(5, SECONDS);

counter1.tell(new Coordinated(new Increment(counter2), timeout), ActorRef.noSender());

Integer count = (Integer) Await.result(
    ask(counter1, "GetCount", timeout), timeout.duration());
```

To start a new coordinated transaction that you will also participate in, create a `Coordinated` object, passing in a `Timeout`:

```
Timeout timeout = new Timeout(5, SECONDS);
Coordinated coordinated = new Coordinated(timeout);
```

To start a coordinated transaction that you won't participate in yourself you can create a `Coordinated` object with a message and send it directly to an actor. The recipient of the message will be the first member of the coordination set:

```
actor.tell(new Coordinated(new Message(), timeout), ActorRef.noSender());
```

To include another actor in the same coordinated transaction that you've created or received, use the `coordinate` method on that object. This will increment the number of parties involved by one and create a new `Coordinated` object to be sent.

```
actor.tell(coordinated.coordinate(new Message()), ActorRef.noSender());
```

To enter the coordinated transaction use the `atomic` method of the coordinated object, passing in a `java.lang Runnable`.

```
coordinated.atomic(new Runnable() {
    public void run() {
        // do something in the coordinated transaction ...
    }
});
```

The coordinated transaction will wait for the other transactions before committing. If any of the coordinated transactions fail then they all fail.

Note: The same actor should not be added to a coordinated transaction more than once. The transaction will not be able to complete as an actor only processes a single message at a time. When processing the first message the coordinated transaction will wait for the commit barrier, which in turn needs the second message to be received to proceed.

4.4.4 UntypedTransactor

UntypedTransactors are untyped actors that provide a general pattern for coordinating transactions, using the explicit coordination described above.

Here's an example of a simple untyped transactor that will join a coordinated transaction:

```
import akka.transactor.*;
import scala.concurrent.stm.Ref;
import scala.concurrent.stm.japi.STM;

public class Counter extends UntypedTransactor {
    Ref.View<Integer> count = STM.newRef(0);

    public void atomically(Object message) {
        if (message instanceof Increment) {
            STM.increment(count, 1);
        }
    }
}
```

```

@Override public boolean normally(Object message) {
    if ("GetCount".equals(message)) {
        getSender().tell(count.get(), getSelf());
        return true;
    } else return false;
}
}

```

You could send this Counter transactor a `Coordinated(Increment)` message. If you were to send it just an `Increment` message it will create its own `Coordinated` (but in this particular case wouldn't be coordinating transactions with any other transactors).

To coordinate with other transactors override the `coordinate` method. The `coordinate` method maps a message to a set of `SendTo` objects, pairs of `ActorRef` and a message. You can use the `include` and `sendTo` methods to easily coordinate with other transactors.

Here's an example of coordinating an increment, using an untyped transactor, similar to the explicitly coordinated example above.

```

import akka.transactor.*;
import java.util.Set;
import scala.concurrent.stm.Ref;
import scala.concurrent.stm.japi.STM;

public class FriendlyCounter extends UntypedTransactor {
    Ref.View<Integer> count = STM.newRef(0);

    @Override public Set<SendTo> coordinate(Object message) {
        if (message instanceof Increment) {
            Increment increment = (Increment) message;
            if (increment.hasFriend())
                return include(increment.getFriend(), new Increment());
        }
        return nobody();
    }

    public void atomically(Object message) {
        if (message instanceof Increment) {
            STM.increment(count, 1);
        }
    }

    @Override public boolean normally(Object message) {
        if ("GetCount".equals(message)) {
            getSender().tell(count.get(), getSelf());
            return true;
        } else return false;
    }
}

```

To execute directly before or after the coordinated transaction, override the `before` and `after` methods. They do not execute within the transaction.

To completely bypass coordinated transactions override the `normally` method. Any message matched by `normally` will not be matched by the other methods, and will not be involved in coordinated transactions. In this method you can implement normal actor behavior, or use the normal STM atomic for local transactions.

5.1 Cluster Specification

Note: This document describes the design concepts of the clustering. It is divided into two parts, where the first part describes what is currently implemented and the second part describes what is planned as future enhancements/additions. References to unimplemented parts have been marked with the footnote [\[*\]](#)

5.1.1 The Current Cluster

Intro

Akka Cluster provides a fault-tolerant decentralized peer-to-peer based cluster [membership](#) service with no single point of failure or single point of bottleneck. It does this using [gossip](#) protocols and an automatic [failure detector](#).

Terms

node A logical member of a cluster. There could be multiple nodes on a physical machine. Defined by a *hostname:port:uid* tuple.

cluster A set of nodes joined together through the [membership](#) service.

leader A single node in the cluster that acts as the leader. Managing cluster convergence, partitions [\[*\]](#), fail-over [\[*\]](#), rebalancing [\[*\]](#) etc.

Membership

A cluster is made up of a set of member nodes. The identifier for each node is a *hostname:port:uid* tuple. An Akka application can be distributed over a cluster with each node hosting some part of the application. Cluster membership and partitioning [\[*\]](#) of the application are decoupled. A node could be a member of a cluster without hosting any actors.

The node identifier internally also contains a UID that uniquely identifies this actor system instance at that *hostname:port*. Akka uses the UID to be able to reliably trigger remote death watch. This means that the same actor system can never join a cluster again once it's been removed from that cluster. To re-join an actor system with the same *hostname:port* to a cluster you have to stop the actor system and start a new one with the same *hostname:port* which will then receive a different UID.

Gossip

The cluster membership used in Akka is based on Amazon's [Dynamo](#) system and particularly the approach taken in Basho's [Riak](#) distributed database. Cluster membership is communicated using a [Gossip Protocol](#), where the current state of the cluster is gossiped randomly through the cluster, with preference to members that have not

seen the latest version. Joining a cluster is initiated by issuing a `Join` command to one of the nodes in the cluster to join.

Vector Clocks `Vector clocks` are a type of data structure and algorithm for generating a partial ordering of events in a distributed system and detecting causality violations.

We use vector clocks to reconcile and merge differences in cluster state during gossiping. A vector clock is a set of (node, counter) pairs. Each update to the cluster state has an accompanying update to the vector clock.

Gossip Convergence Information about the cluster converges locally at a node at certain points in time. This is when a node can prove that the cluster state he is observing has been observed by all other nodes in the cluster. Convergence is implemented by passing a map from node to current state version during gossip. This information is referred to as the gossip overview. When all versions in the overview are equal there is convergence. Gossip convergence cannot occur while any nodes are `unreachable`. The nodes need to be moved to the `down` or `removed` states (see the [Membership Lifecycle](#) section below).

Failure Detector The failure detector is responsible for trying to detect if a node is `unreachable` from the rest of the cluster. For this we are using an implementation of [The Phi Accrual Failure Detector](#) by Hayashibara et al.

An accrual failure detector decouple monitoring and interpretation. That makes them applicable to a wider area of scenarios and more adequate to build generic failure detection services. The idea is that it is keeping a history of failure statistics, calculated from heartbeats received from other nodes, and is trying to do educated guesses by taking multiple factors, and how they accumulate over time, into account in order to come up with a better guess if a specific node is up or down. Rather than just answering “yes” or “no” to the question “is the node down?” it returns a `phi` value representing the likelihood that the node is down.

The `threshold` that is the basis for the calculation is configurable by the user. A low `threshold` is prone to generate many wrong suspicions but ensures a quick detection in the event of a real crash. Conversely, a high `threshold` generates fewer mistakes but needs more time to detect actual crashes. The default `threshold` is 8 and is appropriate for most situations. However in cloud environments, such as Amazon EC2, the value could be increased to 12 in order to account for network issues that sometimes occur on such platforms.

In a cluster each node is monitored by a few (default maximum 5) other nodes, and when any of these detects the node as `unreachable` that information will spread to the rest of the cluster through the gossip. In other words, only one node needs to mark a node `unreachable` to have the rest of the cluster mark that node `unreachable`. Right now there is no way for a node to come back from `unreachable`. This is planned for the next release of Akka. It also means that the `unreachable` node needs to be moved to the `down` or `removed` states (see the [Membership Lifecycle](#) section below).

Leader After gossip convergence a `leader` for the cluster can be determined. There is no `leader` election process, the `leader` can always be recognised deterministically by any node whenever there is gossip convergence. The `leader` is simply the first node in sorted order that is able to take the leadership role, where the preferred member states for a `leader` are `up` and `leaving` (see the [Membership Lifecycle](#) section below for more information about member states).

The role of the `leader` is to shift members in and out of the cluster, changing `joining` members to the `up` state or `exiting` members to the `removed` state. Currently `leader` actions are only triggered by receiving a new cluster state with gossip convergence.

The `leader` also has the power, if configured so, to “auto-down” a node that according to the [Failure Detector](#) is considered `unreachable`. This means setting the `unreachable` node status to `down` automatically.

Seed Nodes The seed nodes are configured contact points for initial join of the cluster. When a new node is started it sends a message to all seed nodes and then sends a join command to the seed node that answers first.

It is possible to not use seed nodes and instead join any node in the cluster manually.

Gossip Protocol A variation of *push-pull gossip* is used to reduce the amount of gossip information sent around the cluster. In push-pull gossip a digest is sent representing current versions but not actual values; the recipient of the gossip can then send back any values for which it has newer versions and also request values for which it has outdated versions. Akka uses a single shared state with a vector clock for versioning, so the variant of push-pull gossip used in Akka makes use of this version to only push the actual state as needed.

Periodically, the default is every 1 second, each node chooses another random node to initiate a round of gossip with. The choice of node is random but can also include extra gossiping nodes with either newer or older state versions.

The gossip overview contains the current state version for all nodes and also a list of unreachable nodes. This allows any node to easily determine which other nodes have newer or older information, not just the nodes involved in a gossip exchange.

The nodes defined as `seed` nodes are just regular member nodes whose only “special role” is to function as contact points in the cluster.

During each round of gossip exchange it sends Gossip to random node with newer or older state information, if any, based on the current gossip overview, with some probability. Otherwise Gossip to any random live node.

The gossip only sends the gossip version to the chosen node. The recipient of the gossip can use the gossip version to determine whether:

1. it has a newer version of the gossip state, in which case it sends that back to the gossip, or
2. it has an outdated version of the state, in which case the recipient requests the current state from the gossip

If the recipient and the gossip have the same version then the gossip state is not sent or requested.


Membership Lifecycle

A node begins in the `joining` state. Once all nodes have seen that the new node is joining (through gossip convergence) the `leader` will set the member state to `up`.

If a node is leaving the cluster in a safe, expected manner then it switches to the `leaving` state. Once the leader sees the convergence on the node in the `leaving` state, the leader will then move it to `exiting`. Once all nodes have seen the exiting state (convergence) the `leader` will remove the node from the cluster, marking it as removed.

If a node is `unreachable` then gossip convergence is not possible and therefore any `leader` actions are also not possible (for instance, allowing a node to become a part of the cluster). To be able to move forward the state of the `unreachable` nodes must be changed. Currently the only way forward is to mark the node as down. If the node is to join the cluster again the actor system must be restarted and go through the joining process again. The cluster can, through the leader, also *auto-down* a node.

Note: If you have *auto-down* enabled and the failure detector triggers, you can over time end up with a lot of single node clusters if you don't put measures in place to shut down nodes that have become `unreachable`. This follows from the fact that the `unreachable` node will likely see the rest of the cluster as `unreachable`, become its own leader and form its own cluster.

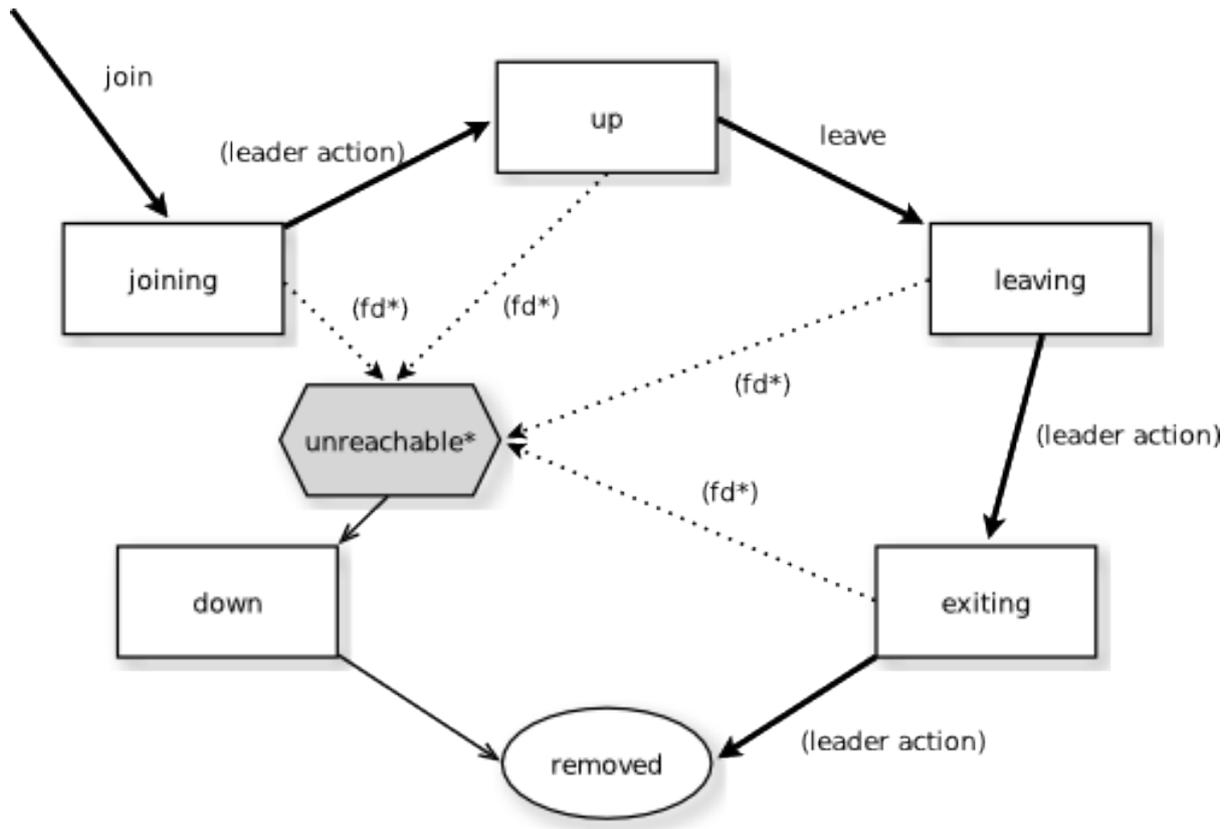

State Diagram for the Member States

Member States

- **joining** transient state when joining a cluster
- **up** normal operating state
- **leaving / exiting** states during graceful removal
- **down** marked as down (no longer part of cluster decisions)
- **removed** tombstone state (no longer a member)

User Actions

- **join** join a single node to a cluster - can be explicit or automatic on startup if a node to join have been specified in the configuration
- **leave** tell a node to leave the cluster gracefully
- **down** mark a node as down

Leader Actions The leader has the following duties:

- shifting members in and out of the cluster
 - joining -> up
 - exiting -> removed

Failure Detection and Unreachability

- **fd*** the failure detector of one of the monitoring nodes has triggered causing the monitored node to be marked as unreachable

- **unreachable*** unreachable is not a real member state but more of a flag in addition to the state signaling that the cluster is unable to talk to this node

5.1.2 Future Cluster Enhancements and Additions

Goal

In addition to membership also provide automatic partitioning *[*]*, handoff *[*]*, and cluster rebalancing *[*]* of actors.

Additional Terms

These additional terms are used in this section.

partition *[*]* An actor or subtree of actors in the Akka application that is distributed within the cluster.

partition point *[*]* The actor at the head of a partition. The point around which a partition is formed.

partition path *[*]* Also referred to as the actor address. Has the format *actor1/actor2/actor3*

instance count *[*]* The number of instances of a partition in the cluster. Also referred to as the *N-value* of the partition.

instance node *[*]* A node that an actor instance is assigned to.

partition table *[*]* A mapping from partition path to a set of instance nodes (where the nodes are referred to by the ordinal position given the nodes in sorted order).

Partitioning *[*]*

Note: Actor partitioning is not implemented yet.

Each partition (an actor or actor subtree) in the actor system is assigned to a set of nodes in the cluster. The actor at the head of the partition is referred to as the partition point. The mapping from partition path (actor address of the format “a/b/c”) to instance nodes is stored in the partition table and is maintained as part of the cluster state through the gossip protocol. The partition table is only updated by the `leader` node. Currently the only possible partition points are *routed* actors.

Routed actors can have an instance count greater than one. The instance count is also referred to as the *N-value*. If the *N-value* is greater than one then a set of instance nodes will be given in the partition table.

Note that in the first implementation there may be a restriction such that only top-level partitions are possible (the highest possible partition points are used and sub-partitioning is not allowed). Still to be explored in more detail.

The cluster `leader` determines the current instance count for a partition based on two axes: fault-tolerance and scaling.

Fault-tolerance determines a minimum number of instances for a routed actor (allowing *N-1* nodes to crash while still maintaining at least one running actor instance). The user can specify a function from current number of nodes to the number of acceptable node failures: *n: Int => f: Int* where *f < n*.

Scaling reflects the number of instances needed to maintain good throughput and is influenced by metrics from the system, particularly a history of mailbox size, CPU load, and GC percentages. It may also be possible to accept scaling hints from the user that indicate expected load.

The balancing of partitions can be determined in a very simple way in the first implementation, where the overlap of partitions is minimized. Partitions are spread over the cluster ring in a circular fashion, with each instance node in the first available space. For example, given a cluster with ten nodes and three partitions, A, B, and C, having *N-values* of 4, 3, and 5; partition A would have instances on nodes 1-4; partition B would have instances on nodes 5-7; partition C would have instances on nodes 8-10 and 1-2. The only overlap is on nodes 1 and 2.

The distribution of partitions is not limited, however, to having instances on adjacent nodes in the sorted ring order. Each instance can be assigned to any node and the more advanced load balancing algorithms will make use of this. The partition table contains a mapping from path to instance nodes. The partitioning for the above example would be:

```
A -> { 1, 2, 3, 4 }
B -> { 5, 6, 7 }
C -> { 8, 9, 10, 1, 2 }
```

If 5 new nodes join the cluster and in sorted order these nodes appear after the current nodes 2, 4, 5, 7, and 8, then the partition table could be updated to the following, with all instances on the same physical nodes as before:

```
A -> { 1, 2, 4, 5 }
B -> { 7, 9, 10 }
C -> { 12, 14, 15, 1, 2 }
```

When rebalancing is required the `leader` will schedule handoffs, gossiping a set of pending changes, and when each change is complete the `leader` will update the partition table.

Additional Leader Responsibilities

After moving a member from joining to up, the leader can start assigning partitions `[*]` to the new node, and when a node is leaving the `leader` will reassign partitions `[*]` across the cluster (it is possible for a leaving node to itself be the `leader`). When all partition handoff `[*]` has completed then the node will change to the `exiting` state.

On convergence the leader can schedule rebalancing across the cluster, but it may also be possible for the user to explicitly rebalance the cluster by specifying migrations `[*]`, or to rebalance `[*]` the cluster automatically based on metrics from member nodes. Metrics may be spread using the gossip protocol or possibly more efficiently using a *random chord* method, where the `leader` contacts several random nodes around the cluster ring and each contacted node gathers information from their immediate neighbours, giving a random sampling of load information.

Handoff

Handoff for an actor-based system is different than for a data-based system. The most important point is that message ordering (from a given node to a given actor instance) may need to be maintained. If an actor is a singleton actor (only one instance possible throughout the cluster) then the cluster may also need to assure that there is only one such actor active at any one time. Both of these situations can be handled by forwarding and buffering messages during transitions.

A *graceful handoff* (one where the previous host node is up and running during the handoff), given a previous host node N1, a new host node N2, and an actor partition A to be migrated from N1 to N2, has this general structure:

1. the `leader` sets a pending change for N1 to handoff A to N2
2. N1 notices the pending change and sends an initialization message to N2
3. in response N2 creates A and sends back a ready message
4. after receiving the ready message N1 marks the change as complete and shuts down A
5. the `leader` sees the migration is complete and updates the partition table
6. all nodes eventually see the new partitioning and use N2

Transitions There are transition times in the handoff process where different approaches can be used to give different guarantees.

Migration Transition The first transition starts when N1 initiates the moving of A and ends when N1 receives the ready message, and is referred to as the *migration transition*.

The first question is; during the migration transition, should:

- N1 continue to process messages for A?
- Or is it important that no messages for A are processed on N1 once migration begins?

If it is okay for the previous host node N1 to process messages during migration then there is nothing that needs to be done at this point.

If no messages are to be processed on the previous host node during migration then there are two possibilities: the messages are forwarded to the new host and buffered until the actor is ready, or the messages are simply dropped by terminating the actor and allowing the normal dead letter process to be used.

Update Transition The second transition begins when the migration is marked as complete and ends when all nodes have the updated partition table (when all nodes will use N2 as the host for A, i.e. we have convergence) and is referred to as the *update transition*.

Once the update transition begins N1 can forward any messages it receives for A to the new host N2. The question is whether or not message ordering needs to be preserved. If messages sent to the previous host node N1 are being forwarded, then it is possible that a message sent to N1 could be forwarded after a direct message to the new host N2, breaking message ordering from a client to actor A.

In this situation N2 can keep a buffer for messages per sending node. Each buffer is flushed and removed when an acknowledgement (`ack`) message has been received. When each node in the cluster sees the partition update it first sends an `ack` message to the previous host node N1 before beginning to use N2 as the new host for A. Any messages sent from the client node directly to N2 will be buffered. N1 can count down the number of acks to determine when no more forwarding is needed. The `ack` message from any node will always follow any other messages sent to N1. When N1 receives the `ack` message it also forwards it to N2 and again this `ack` message will follow any other messages already forwarded for A. When N2 receives an `ack` message, the buffer for the sending node can be flushed and removed. Any subsequent messages from this sending node can be queued normally. Once all nodes in the cluster have acknowledged the partition change and N2 has cleared all buffers, the handoff is complete and message ordering has been preserved. In practice the buffers should remain small as it is only those messages sent directly to N2 before the acknowledgement has been forwarded that will be buffered.

Graceful Handoff A more complete process for graceful handoff would be:

1. the `leader` sets a pending change for N1 to handoff A to N2
2. N1 notices the pending change and sends an initialization message to N2. Options:
 - (a) keep A on N1 active and continuing processing messages as normal
 - (b) N1 forwards all messages for A to N2
 - (c) N1 drops all messages for A (terminate A with messages becoming dead letters)
3. in response N2 creates A and sends back a ready message. Options:
 - (a) N2 simply processes messages for A as normal
 - (b) N2 creates a buffer per sending node for A. Each buffer is opened (flushed and removed) when an acknowledgement for the sending node has been received (via N1)
4. after receiving the ready message N1 marks the change as complete. Options:
 - (a) N1 forwards all messages for A to N2 during the update transition
 - (b) N1 drops all messages for A (terminate A with messages becoming dead letters)
5. the `leader` sees the migration is complete and updates the partition table
6. all nodes eventually see the new partitioning and use N2
 - (a) each node sends an acknowledgement message to N1

- (b) when N1 receives the acknowledgement it can count down the pending acknowledgements and remove forwarding when complete
- (c) when N2 receives the acknowledgement it can open the buffer for the sending node (if buffers are used)

The default approach is to take options 2a, 3a, and 4a - allowing A on N1 to continue processing messages during migration and then forwarding any messages during the update transition. This assumes stateless actors that do not have a dependency on message ordering from any given source.

- If an actor has a distributed durable mailbox then nothing needs to be done, other than migrating the actor.
- If message ordering needs to be maintained during the update transition then option 3b can be used, creating buffers per sending node.
- If the actors are robust to message send failures then the dropping messages approach can be used (with no forwarding or buffering needed).
- If an actor is a singleton (only one instance possible throughout the cluster) and state is transferred during the migration initialization, then options 2b and 3b would be required.

Stateful Actor Replication [*]

Note: Stateful actor replication is not implemented yet.

Implementing a Dynamo-style Distributed Database on top of Akka Cluster

Having a Dynamo base for the clustering already we could use the same infrastructure to provide stateful actor clustering and datastore as well. The stateful actor clustering could be layered on top of the distributed datastore.

The missing pieces (rough outline) to implement a full Dynamo-style eventually consistent data storage on top of the Akka Cluster as described in this document are:

- Configuration of READ and WRITE consistency levels according to the N/R/W numbers defined in the Dynamo paper.
 - R = read replica count
 - W = write replica count
 - N = replication factor
 - Q = QUORUM = $N / 2 + 1$
 - $W + R > N$ = full consistency
- Define a versioned data message wrapper:

```
Versioned[T](hash: Long, version: VectorClock, data: T)
```

- Define a single system data broker actor on each node that uses a Consistent Hashing Router and that have instances on all other nodes in the node ring.
- For WRITE:
 1. Wrap data in a Versioned Message
 2. Send a Versioned Message with the data is sent to a number of nodes matching the W-value.
- For READ:
 1. Read in the Versioned Message with the data from as many replicas as you need for the consistency level required by the R-value.
 2. Do comparison on the versions (using Vector Clocks)

3. If the versions differ then do [Read Repair](#) to update the inconsistent nodes.
4. Return the latest versioned data.

[*] Not Implemented Yet

- Actor partitioning
- Actor handoff
- Actor rebalancing
- Stateful actor replication
- Node becoming `reachable` after it has been marked as `unreachable`

5.2 Cluster Usage

For introduction to the Akka Cluster concepts please see *Cluster Specification*.

5.2.1 Preparing Your Project for Clustering

The Akka cluster is a separate jar file. Make sure that you have the following dependency in your project:

```
<dependency>
  <groupId>com.typesafe.akka</groupId>
  <artifactId>akka-cluster_2.10</artifactId>
  <version>2.2.5</version>
</dependency>
```

5.2.2 A Simple Cluster Example

The following small program together with its configuration starts an `ActorSystem` with the Cluster enabled. It joins the cluster and logs some membership events.

Try it out:

1. Add the following `application.conf` in your project, place it in `src/main/resources`:

```
akka {
  actor {
    provider = "akka.cluster.ClusterActorRefProvider"
  }
  remote {
    log-remote-lifecycle-events = off
    netty.tcp {
      hostname = "127.0.0.1"
      port = 0
    }
  }

  cluster {
    seed-nodes = [
      "akka.tcp://ClusterSystem@127.0.0.1:2551",
      "akka.tcp://ClusterSystem@127.0.0.1:2552"
    ]

    auto-down = on
  }
}
```

To enable cluster capabilities in your Akka project you should, at a minimum, add the *Remoting* settings, but with `akka.cluster.ClusterActorRefProvider`. The `akka.cluster.seed-nodes` should normally also be added to your `application.conf` file.

The seed nodes are configured contact points for initial, automatic, join of the cluster.

Note that if you are going to start the nodes on different machines you need to specify the ip-addresses or host names of the machines in `application.conf` instead of `127.0.0.1`

2. Add the following main program to your project, place it in `src/main/java`:

```
package sample.cluster.simple.japi;

import akka.actor.ActorRef;
import akka.actor.ActorSystem;
import akka.actor.Props;
import akka.cluster.Cluster;
import akka.cluster.ClusterEvent.ClusterDomainEvent;

public class SimpleClusterApp {

    public static void main(String[] args) {
        // Override the configuration of the port
        // when specified as program argument
        if (args.length > 0)
            System.setProperty("akka.remote.netty.tcp.port", args[0]);

        // Create an Akka system
        ActorSystem system = ActorSystem.create("ClusterSystem");

        // Create an actor that handles cluster domain events
        ActorRef clusterListener = system.actorOf(Props.create(
            SimpleClusterListener.class), "clusterListener");

        // Add subscription of cluster events
        Cluster.get(system).subscribe(clusterListener,
            ClusterDomainEvent.class);
    }
}
```

3. Start the first seed node. Open a terminal window and run (one line):

```
mvn exec:java -Dexec.mainClass="sample.cluster.simple.japi.SimpleClusterApp" \
-Dexec.args="2551"
```

2551 corresponds to the port of the first seed-nodes element in the configuration. In the log output you see that the cluster node has been started and changed status to 'Up'.

4. Start the second seed node. Open another terminal window and run:

```
mvn exec:java -Dexec.mainClass="sample.cluster.simple.japi.SimpleClusterApp" \
-Dexec.args="2552"
```

2552 corresponds to the port of the second seed-nodes element in the configuration. In the log output you see that the cluster node has been started and joins the other seed node and becomes a member of the cluster. Its status changed to 'Up'.

Switch over to the first terminal window and see in the log output that the member joined.

5. Start another node. Open a maven session in yet another terminal window and run:

```
mvn exec:java -Dexec.mainClass="sample.cluster.simple.japi.SimpleClusterApp"
```

Now you don't need to specify the port number, and it will use a random available port. It joins one of the configured seed nodes. Look at the log output in the different terminal windows.

Start even more nodes in the same way, if you like.

6. Shut down one of the nodes by pressing ‘ctrl-c’ in one of the terminal windows. The other nodes will detect the failure after a while, which you can see in the log output in the other terminals.

Look at the source code of the program again. What it does is to create an actor and register it as subscriber of certain cluster events. It gets notified with an snapshot event, `CurrentClusterState` that holds full state information of the cluster. After that it receives events for changes that happen in the cluster.

5.2.3 Joining to Seed Nodes

You may decide if joining to the cluster should be done manually or automatically to configured initial contact points, so-called seed nodes. When a new node is started it sends a message to all seed nodes and then sends join command to the one that answers first. If no one of the seed nodes replied (might not be started yet) it retries this procedure until successful or shutdown.

You define the seed nodes in the *Configuration* file (application.conf):

```
akka.cluster.seed-nodes = [
  "akka.tcp://ClusterSystem@host1:2552",
  "akka.tcp://ClusterSystem@host2:2552"]
```

This can also be defined as Java system properties when starting the JVM using the following syntax:

```
-Dakka.cluster.seed-nodes.0=akka.tcp://ClusterSystem@host1:2552
-Dakka.cluster.seed-nodes.1=akka.tcp://ClusterSystem@host2:2552
```

The seed nodes can be started in any order and it is not necessary to have all seed nodes running, but the node configured as the first element in the `seed-nodes` configuration list must be started when initially starting a cluster, otherwise the other seed-nodes will not become initialized and no other node can join the cluster. It is quickest to start all configured seed nodes at the same time (order doesn’t matter), otherwise it can take up to the configured `seed-node-timeout` until the nodes can join.

Once more than two seed nodes have been started it is no problem to shut down the first seed node. If the first seed node is restarted it will first try join the other seed nodes in the existing cluster.

If you don’t configure the seed nodes you need to join manually, using *JMX* or *Command Line Management*. You can join to any node in the cluster. It doesn’t have to be configured as a seed node.

Joining can also be performed programatically with `Cluster.get(system).join(address)`.

Unsuccessful join attempts are automatically retried after the time period defined in configuration property `retry-unsuccessful-join-after`. When using `seed-nodes` this means that a new seed node is picked. When joining manually or programatically this means that the last join request is retried. Retries can be disabled by setting the property to `off`.

An actor system can only join a cluster once. Additional attempts will be ignored. When it has successfully joined it must be restarted to be able to join another cluster or to join the same cluster again. It can use the same host name and port after the restart, but it must have been removed from the cluster before the join request is accepted.

5.2.4 Automatic vs. Manual Downing

When a member is considered by the failure detector to be unreachable the leader is not allowed to perform its duties, such as changing status of new joining members to ‘Up’. The status of the unreachable member must be changed to ‘Down’. This can be performed automatically or manually. By default it must be done manually, using *JMX* or *Command Line Management*.

It can also be performed programatically with `Cluster.get(system).down(address)`.

You can enable automatic downing with configuration:

```
akka.cluster.auto-down = on
```

Be aware of that using auto-down implies that two separate clusters will automatically be formed in case of network partition. That might be desired by some applications but not by others.

5.2.5 Leaving

There are two ways to remove a member from the cluster.

You can just stop the actor system (or the JVM process). It will be detected as unreachable and removed after the automatic or manual downing as described above.

A more graceful exit can be performed if you tell the cluster that a node shall leave. This can be performed using *JMX* or *Command Line Management*. It can also be performed programatically with `Cluster.get(system).leave(address)`.

Note that this command can be issued to any member in the cluster, not necessarily the one that is leaving. The cluster extension, but not the actor system or JVM, of the leaving member will be shutdown after the leader has changed status of the member to *Exiting*. Thereafter the member will be removed from the cluster. Normally this is handled automatically, but in case of network failures during this process it might still be necessary to set the node's status to `Down` in order to complete the removal.

5.2.6 Subscribe to Cluster Events

You can subscribe to change notifications of the cluster membership by using `Cluster.get(system).subscribe(subscriber, to)`. A snapshot of the full state, `akka.cluster.ClusterEvent.CurrentClusterState`, is sent to the subscriber as the first event, followed by events for incremental updates.

Note that you may receive an empty `CurrentClusterState`, containing no members, if you start the subscription before the initial join procedure has completed. This is expected behavior. When the node has been accepted in the cluster you will receive `MemberUp` for that node, and other nodes.

The events to track the life-cycle of members are:

- `ClusterEvent.MemberUp` - A new member has joined the cluster and its status has been changed to `Up`.
- `ClusterEvent.MemberExited` - A member is leaving the cluster and its status has been changed to `Exiting`. Note that the node might already have been shutdown when this event is published on another node.
- `ClusterEvent.MemberRemoved` - Member completely removed from the cluster.
- `ClusterEvent.UnreachableMember` - A member is considered as unreachable by the failure detector.

There are more types of change events, consult the API documentation of classes that extends `akka.cluster.ClusterEvent.ClusterDomainEvent` for details about the events.

Worker Dial-in Example

Let's take a look at an example that illustrates how workers, here named *backend*, can detect and register to new master nodes, here named *frontend*.

The example application provides a service to transform text. When some text is sent to one of the frontend services, it will be delegated to one of the backend workers, which performs the transformation job, and sends the result back to the original client. New backend nodes, as well as new frontend nodes, can be added or removed to the cluster dynamically.

In this example the following imports are used:

```
import akka.actor.UntypedActor;
import akka.cluster.Cluster;
import akka.cluster.ClusterEvent.CurrentClusterState;
import akka.cluster.ClusterEvent.MemberUp;
import akka.cluster.Member;
import akka.cluster.MemberStatus;
```

Messages:

```

public interface TransformationMessages {

    public static class TransformationJob implements Serializable {
        private final String text;

        public TransformationJob(String text) {
            this.text = text;
        }

        public String getText() {
            return text;
        }
    }

    public static class TransformationResult implements Serializable {
        private final String text;

        public TransformationResult(String text) {
            this.text = text;
        }

        public String getText() {
            return text;
        }

        @Override
        public String toString() {
            return "TransformationResult(" + text + ")";
        }
    }

    public static class JobFailed implements Serializable {
        private final String reason;
        private final TransformationJob job;

        public JobFailed(String reason, TransformationJob job) {
            this.reason = reason;
            this.job = job;
        }

        public String getReason() {
            return reason;
        }

        public TransformationJob getJob() {
            return job;
        }

        @Override
        public String toString() {
            return "JobFailed(" + reason + ")";
        }
    }

    public static final String BACKEND_REGISTRATION = "BackendRegistration";
}

```

The backend worker that performs the transformation job:

```

public class TransformationBackend extends UntypedActor {

    Cluster cluster = Cluster.get(getContext().system());

    //subscribe to cluster changes, MemberUp
    @Override
    public void preStart() {
        cluster.subscribe(getSelf(), MemberUp.class);
    }

    //re-subscribe when restart
    @Override
    public void postStop() {
        cluster.unsubscribe(getSelf());
    }

    @Override
    public void onReceive(Object message) {
        if (message instanceof TransformationJob) {
            TransformationJob job = (TransformationJob) message;
            getSender()
                .tell(new TransformationResult(job.getText().toUpperCase()),
                    getSelf());
        } else if (message instanceof CurrentClusterState) {
            CurrentClusterState state = (CurrentClusterState) message;
            for (Member member : state.getMembers()) {
                if (member.status().equals(MemberStatus.up())) {
                    register(member);
                }
            }
        } else if (message instanceof MemberUp) {
            MemberUp mUp = (MemberUp) message;
            register(mUp.member());
        } else {
            unhandled(message);
        }
    }

    void register(Member member) {
        if (member.hasRole("frontend"))
            getContext().actorSelection(member.address() + "/user/frontend").tell(
                BACKEND_REGISTRATION, getSelf());
    }
}

```

Note that the `TransformationBackend` actor subscribes to cluster events to detect new, potential, frontend nodes, and send them a registration message so that they know that they can use the backend worker.

The frontend that receives user jobs and delegates to one of the registered backend workers:

```

public class TransformationFrontend extends UntypedActor {

    List<ActorRef> backends = new ArrayList<ActorRef>();
    int jobCounter = 0;

    @Override
    public void onReceive(Object message) {
        if ((message instanceof TransformationJob) && backends.isEmpty()) {
            TransformationJob job = (TransformationJob) message;
            getSender().tell(

```

```

        new JobFailed("Service unavailable, try again later", job),
        getSender());

    } else if (message instanceof TransformationJob) {
        TransformationJob job = (TransformationJob) message;
        jobCounter++;
        backends.get(jobCounter % backends.size())
            .forward(job, getContext());

    } else if (message.equals(BACKEND_REGISTRATION)) {
        getContext().watch(getSender());
        backends.add(getSender());

    } else if (message instanceof Terminated) {
        Terminated terminated = (Terminated) message;
        backends.remove(terminated.getActor());

    } else {
        unhandled(message);
    }
}
}

```

Note that the `TransformationFrontend` actor watch the registered backend to be able to remove it from its list of available backend workers. Death watch uses the cluster failure detector for nodes in the cluster, i.e. it detects network failures and JVM crashes, in addition to graceful termination of watched actor.

This example is included in `akka-samples/akka-sample-cluster` and you can try it by copying the [source](#) to your maven project, defined as in *A Simple Cluster Example*. Run it by starting nodes in different terminal windows. For example, starting 2 frontend nodes and 3 backend nodes:

```

mvn exec:java \
  -Dexec.mainClass="sample.cluster.transformation.japi.TransformationFrontendMain" \
  -Dexec.args="2551"

mvn exec:java \
  -Dexec.mainClass="sample.cluster.transformation.japi.TransformationBackendMain" \
  -Dexec.args="2552"

mvn exec:java \
  -Dexec.mainClass="sample.cluster.transformation.japi.TransformationBackendMain"

mvn exec:java \
  -Dexec.mainClass="sample.cluster.transformation.japi.TransformationBackendMain"

mvn exec:java \
  -Dexec.mainClass="sample.cluster.transformation.japi.TransformationFrontendMain"

```

5.2.7 Node Roles

Not all nodes of a cluster need to perform the same function: there might be one sub-set which runs the web front-end, one which runs the data access layer and one for the number-crunching. Deployment of actors—for example by cluster-aware routers—can take node roles into account to achieve this distribution of responsibilities.

The roles of a node is defined in the configuration property named `akka.cluster.roles` and it is typically defined in the start script as a system property or environment variable.

The roles of the nodes is part of the membership information in `MemberEvent` that you can subscribe to.

5.2.8 How To Startup when Cluster Size Reached

A common use case is to start actors after the cluster has been initialized, members have joined, and the cluster has reached a certain size.

With a configuration option you can define required number of members before the leader changes member status of 'Joining' members to 'Up'.

```
akka.cluster.min-nr-of-members = 3
```

In a similar way you can define required number of members of a certain role before the leader changes member status of 'Joining' members to 'Up'.

```
akka.cluster.role {
  frontend.min-nr-of-members = 1
  backend.min-nr-of-members = 2
}
```

You can start the actors in a `registerOnMemberUp` callback, which will be invoked when the current member status is changed to 'Up', i.e. the cluster has at least the defined number of members.

```
Cluster.get(system).registerOnMemberUp(new Runnable() {
  @Override
  public void run() {
    system.actorOf(Props.create(FactorialFrontend.class, upToN, true),
      "factorialFrontend");
  }
});
```

This callback can be used for other things than starting actors.

5.2.9 Cluster Singleton Pattern

For some use cases it is convenient and sometimes also mandatory to ensure that you have exactly one actor of a certain type running somewhere in the cluster.

This can be implemented by subscribing to member events, but there are several corner cases to consider. Therefore, this specific use case is made easily accessible by the *Cluster Singleton Pattern* in the `contrib` module. You can use it as is, or adjust to fit your specific needs.

5.2.10 Distributed Publish Subscribe Pattern

See *Distributed Publish Subscribe in Cluster* in the `contrib` module.

5.2.11 Cluster Client

See *Cluster Client* in the `contrib` module.

5.2.12 Failure Detector

The nodes in the cluster monitor each other by sending heartbeats to detect if a node is unreachable from the rest of the cluster. The heartbeat arrival times is interpreted by an implementation of [The Phi Accrual Failure Detector](#).

The suspicion level of failure is given by a value called *phi*. The basic idea of the phi failure detector is to express the value of *phi* on a scale that is dynamically adjusted to reflect current network conditions.

The value of *phi* is calculated as:


```
phi = -log10(1 - F(timeSinceLastHeartbeat))
```

where F is the cumulative distribution function of a normal distribution with mean and standard deviation estimated from historical heartbeat inter-arrival times.


In the *Configuration* you can adjust the `akka.cluster.failure-detector.threshold` to define when a ϕ value is considered to be a failure.

A low `threshold` is prone to generate many false positives but ensures a quick detection in the event of a real crash. Conversely, a high `threshold` generates fewer mistakes but needs more time to detect actual crashes. The default `threshold` is 8 and is appropriate for most situations. However in cloud environments, such as Amazon EC2, the value could be increased to 12 in order to account for network issues that sometimes occur on such platforms.


The following chart illustrates how ϕ increase with increasing time since the previous heartbeat.

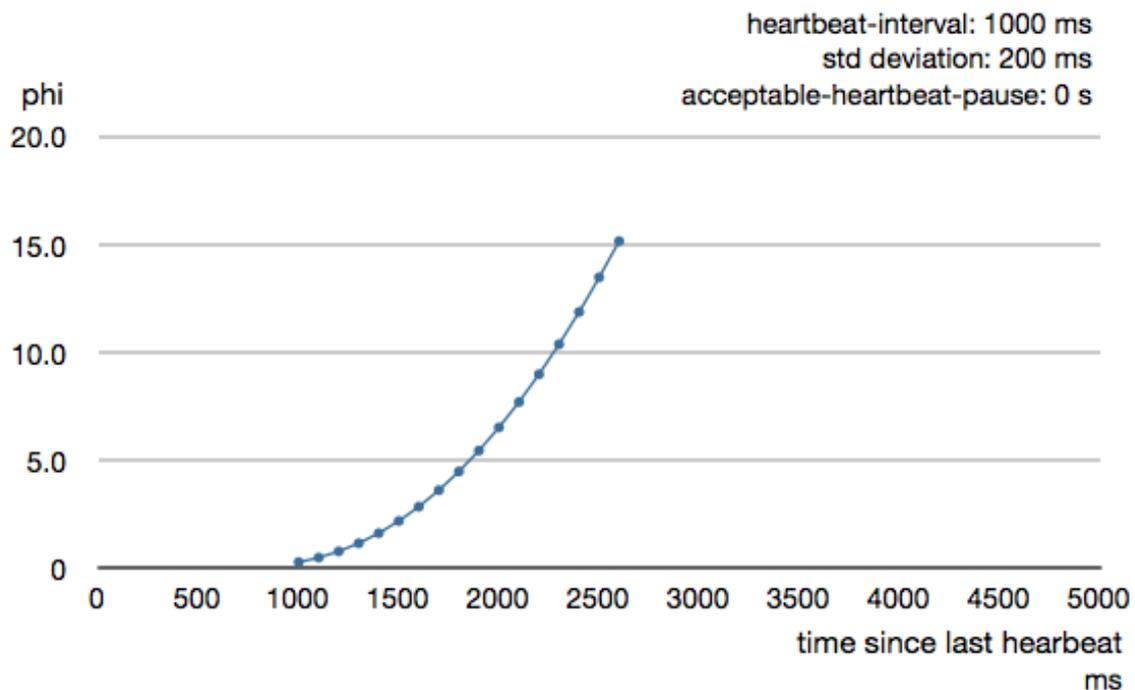

Phi is calculated from the mean and standard deviation of historical inter arrival times. The previous chart is an example for standard deviation of 200 ms. If the heartbeats arrive with less deviation the curve becomes steeper, i.e. it is possible to determine failure more quickly. The curve looks like this for a standard deviation of 100 ms.

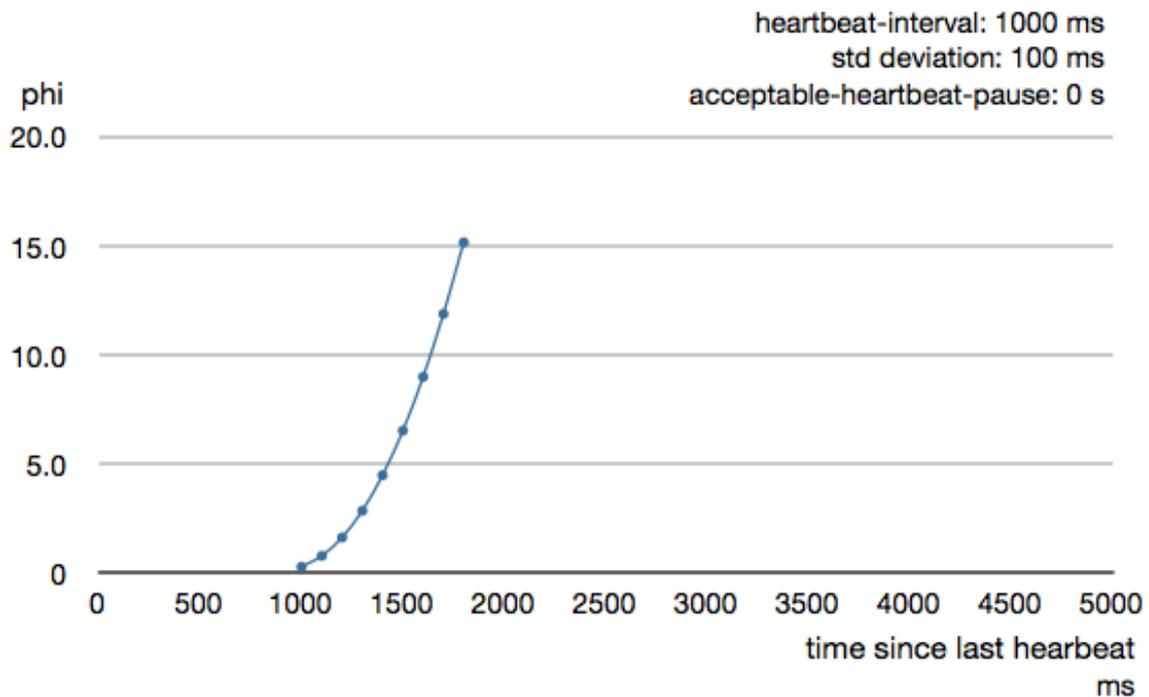

To be able to survive sudden abnormalities, such as garbage collection pauses and transient network failures the failure detector is configured with a margin, `akka.cluster.failure-detector.acceptable-heartbeat-pause`. You may want to adjust the *Configuration* of this depending on you environment. This is how the curve looks like for `acceptable-heartbeat-pause` configured to 3 seconds.

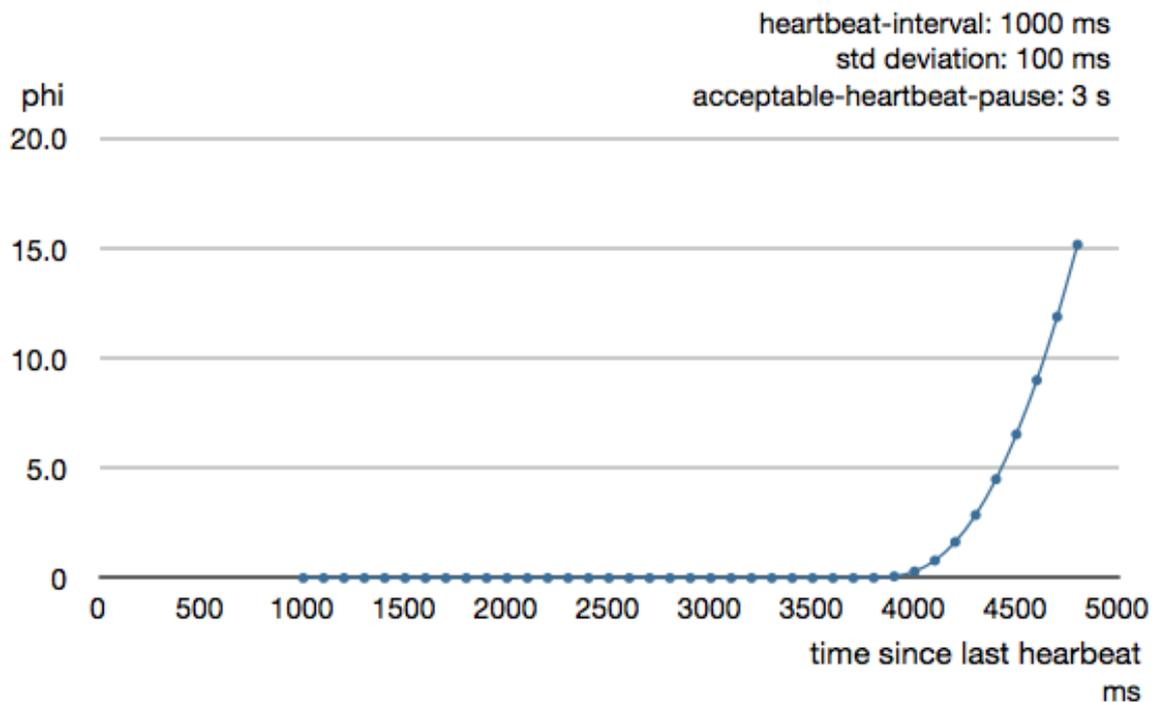

Death watch uses the cluster failure detector for nodes in the cluster, i.e. it generates `Terminated` message from network failures and JVM crashes, in addition to graceful termination of watched actor.

If you encounter suspicious false positives when the system is under load you should define a separate dispatcher

for the cluster actors as described in *Cluster Dispatcher*.

5.2.13 Cluster Aware Routers

All *routers* can be made aware of member nodes in the cluster, i.e. deploying new routees or looking up routees on nodes in the cluster. When a node becomes unavailable or leaves the cluster the routees of that node are automatically unregistered from the router. When new nodes join the cluster additional routees are added to the router, according to the configuration.

There are two distinct types of routers.

- **Router that lookup existing actors and use them as routees.** The routees can be shared between routers running on different nodes in the cluster. One example of a use case for this type of router is a service running on some backend nodes in the cluster and used by routers running on front-end nodes in the cluster.
- **Router that creates new routees as child actors and deploy them on remote nodes.** Each router will have its own routee instances. For example, if you start a router on 3 nodes in a 10 nodes cluster you will have 30 routee actors in total if the router is configured to use one instance per node. The routees created by the the different routers will not be shared between the routers. One example of a use case for this type of router is a single master that coordinate jobs and delegates the actual work to routees running on other nodes in the cluster.

Router with Lookup of Routees

When using a router with routees looked up on the cluster member nodes, i.e. the routees are already running, the configuration for a router looks like this:

```
akka.actor.deployment {
  /statsService/workerRouter {
    router = consistent-hashing
    nr-of-instances = 100
    cluster {
      enabled = on
      routees-path = "/user/statsWorker"
      allow-local-routees = on
      use-role = compute
    }
  }
}
```

Note: The routee actors should be started as early as possible when starting the actor system, because the router will try to use them as soon as the member status is changed to ‘Up’. If it is not available at that point it will be removed from the router and it will only re-try when the cluster members are changed.

It is the relative actor path defined in `routees-path` that identify what actor to lookup. It is possible to limit the lookup of routees to member nodes tagged with a certain role by specifying `use-role`.

`nr-of-instances` defines total number of routees in the cluster, but there will not be more than one per node. That routee actor could easily fan out to local children if more parallelism is needed. Setting `nr-of-instances` to a high value will result in new routees added to the router when nodes join the cluster.

The same type of router could also have been defined in code:

```
int totalInstances = 100;
String routeesPath = "/user/statsWorker";
boolean allowLocalRoutees = true;
String useRole = "compute";
ActorRef workerRouter = getContext().actorOf(
  Props.empty().withRouter(new ClusterRouterConfig(
    new ConsistentHashingRouter(0), new ClusterRouterSettings(
```

```
totalInstances, routeesPath, allowLocalRoutees, useRole))),
"workerRouter2");
```

See *Configuration* section for further descriptions of the settings.

Router Example with Lookup of Routees

Let's take a look at how to use a cluster aware router with lookup of routees.

The example application provides a service to calculate statistics for a text. When some text is sent to the service it splits it into words, and delegates the task to count number of characters in each word to a separate worker, a routee of a router. The character count for each word is sent back to an aggregator that calculates the average number of characters per word when all results have been collected.

In this example we use the following imports:

```
import akka.actor.ActorRef;
import akka.actor.Props;
import akka.actor.UntypedActor;
import akka.cluster.routing.ClusterRouterConfig;
import akka.cluster.routing.ClusterRouterSettings;
import akka.routing.ConsistentHashingRouter;
import akka.routing.ConsistentHashingRouter.ConsistentHashableEnvelope;
import akka.routing.FromConfig;
```

Messages:

```
public interface StatsMessages {

    public static class StatsJob implements Serializable {
        private final String text;

        public StatsJob(String text) {
            this.text = text;
        }

        public String getText() {
            return text;
        }
    }

    public static class StatsResult implements Serializable {
        private final double meanWordLength;

        public StatsResult(double meanWordLength) {
            this.meanWordLength = meanWordLength;
        }

        public double getMeanWordLength() {
            return meanWordLength;
        }

        @Override
        public String toString() {
            return "meanWordLength: " + meanWordLength;
        }
    }

    public static class JobFailed implements Serializable {
        private final String reason;

        public JobFailed(String reason) {
            this.reason = reason;
        }
    }
}
```

```

    }

    public String getReason() {
        return reason;
    }

    @Override
    public String toString() {
        return "JobFailed(" + reason + ")";
    }
}
}

```

The worker that counts number of characters in each word:

```

public class StatsWorker extends UntypedActor {

    Map<String, Integer> cache = new HashMap<String, Integer>();

    @Override
    public void onReceive(Object message) {
        if (message instanceof String) {
            String word = (String) message;
            Integer length = cache.get(word);
            if (length == null) {
                length = word.length();
                cache.put(word, length);
            }
            getSender().tell(length, getSelf());
        } else {
            unhandled(message);
        }
    }
}
}

```

The service that receives text from users and splits it up into words, delegates to workers and aggregates:

```

public class StatsService extends UntypedActor {

    // This router is used both with lookup and deploy of routees. If you
    // have a router with only lookup of routees you can use Props.empty()
    // instead of Props.create(StatsWorker.class).
    ActorRef workerRouter = getContext().actorOf(
        Props.create(StatsWorker.class).withRouter(FromConfig.getInstance()),
        "workerRouter");

    @Override
    public void onReceive(Object message) {
        if (message instanceof StatsJob) {
            StatsJob job = (StatsJob) message;
            if (job.getText().equals("")) {
                unhandled(message);
            } else {
                final String[] words = job.getText().split(" ");
                final ActorRef replyTo = getSender();

                // create actor that collects replies from workers
                ActorRef aggregator = getContext().actorOf(
                    Props.create(StatsAggregator.class, words.length, replyTo));
            }
        }
    }
}

```

```

    // send each word to a worker
    for (String word : words) {
        workerRouter.tell(new ConsistentHashableEnvelope(word, word),
            aggregator);
    }
} else {
    unhandled(message);
}
}
}

```

```

public class StatsAggregator extends UntypedActor {

    final int expectedResults;
    final ActorRef replyTo;
    final List<Integer> results = new ArrayList<Integer>();

    public StatsAggregator(int expectedResults, ActorRef replyTo) {
        this.expectedResults = expectedResults;
        this.replyTo = replyTo;
    }

    @Override
    public void preStart() {
        getContext().setReceiveTimeout(Duration.create(3, TimeUnit.SECONDS));
    }

    @Override
    public void onReceive(Object message) {
        if (message instanceof Integer) {
            Integer wordCount = (Integer) message;
            results.add(wordCount);
            if (results.size() == expectedResults) {
                int sum = 0;
                for (int c : results)
                    sum += c;
                double meanWordLength = ((double) sum) / results.size();
                replyTo.tell(new StatsResult(meanWordLength), getSelf());
                getContext().stop(getSelf());
            }
        } else if (message == ReceiveTimeout.getInstance()) {
            replyTo.tell(new JobFailed("Service unavailable, try again later"),
                getSelf());
            getContext().stop(getSelf());
        } else {
            unhandled(message);
        }
    }
}

```

Note, nothing cluster specific so far, just plain actors.

All nodes start `StatsService` and `StatsWorker` actors. Remember, routees are the workers in this case. The router is configured with `routees-path`:

```

akka.actor.deployment {
  /statsService/workerRouter {
    router = consistent-hashing
  }
}

```

```

nr-of-instances = 100
cluster {
  enabled = on
  routees-path = "/user/statsWorker"
  allow-local-routees = on
  use-role = compute
}
}
}

```

This means that user requests can be sent to StatsService on any node and it will use StatsWorker on all nodes. There can only be one worker per node, but that worker could easily fan out to local children if more parallelism is needed.

This example is included in akka-samples/akka-sample-cluster and you can try it by copying the [source](#) to your maven project, defined as in *A Simple Cluster Example*. Run it by starting nodes in different terminal windows. For example, starting 3 service nodes and 1 client:

```

mvn exec:java \
-Dexec.mainClass="sample.cluster.stats.japi.StatsSampleMain" \
-Dexec.args="2551"

mvn exec:java \
-Dexec.mainClass="sample.cluster.stats.japi.StatsSampleMain" \
-Dexec.args="2552"

mvn exec:java \
-Dexec.mainClass="sample.cluster.stats.japi.StatsSampleMain"

mvn exec:java \
-Dexec.mainClass="sample.cluster.stats.japi.StatsSampleMain"

```

Router with Remote Deployed Routees

When using a router with routees created and deployed on the cluster member nodes the configuration for a router looks like this:

```

akka.actor.deployment {
  /singleton/statsService/workerRouter {
    router = consistent-hashing
    nr-of-instances = 100
    cluster {
      enabled = on
      max-nr-of-instances-per-node = 3
      allow-local-routees = off
      use-role = compute
    }
  }
}

```

It is possible to limit the deployment of routees to member nodes tagged with a certain role by specifying `use-role`.

`nr-of-instances` defines total number of routees in the cluster, but the number of routees per node, `max-nr-of-instances-per-node`, will not be exceeded. Setting `nr-of-instances` to a high value will result in creating and deploying additional routees when new nodes join the cluster.

The same type of router could also have been defined in code:

```

int totalInstances = 100;
int maxInstancesPerNode = 3;
boolean allowLocalRoutees = false;
String useRole = "compute";

```

```
ActorRef workerRouter = getContext().actorOf(
    Props.create(StatsWorker.class).withRouter(new ClusterRouterConfig(
        new ConsistentHashingRouter(), new ClusterRouterSettings(
            totalInstances, maxInstancesPerNode, allowLocalRoutees, useRole)),
    "workerRouter3");
```

See *Configuration* section for further descriptions of the settings.

Router Example with Remote Deployed Routees

Let's take a look at how to use a cluster aware router on single master node that creates and deploys workers. To keep track of a single master we use the *Cluster Singleton Pattern* in the contrib module. The `ClusterSingletonManager` is started on each node.

```
system.actorOf(ClusterSingletonManager.defaultProps(
    "statsService", PoisonPill.getInstance(), "compute",
    new ClusterSingletonPropsFactory() {
        @Override
        public Props create(Object handOverData) {
            return Props.create(StatsService.class);
        }
    }, "singleton");
```

We also need an actor on each node that keeps track of where current single master exists and delegates jobs to the `StatsService`.

```
public class StatsFacade extends UntypedActor {

    final LoggingAdapter log = Logging.getLogger(getContext().system(), this);
    final Cluster cluster = Cluster.get(getContext().system());

    final Comparator<Member> ageComparator = new Comparator<Member>() {
        public int compare(Member a, Member b) {
            if (a.isOlderThan(b)) return -1;
            else if (b.isOlderThan(a)) return 1;
            else return 0;
        }
    };

    final SortedSet<Member> membersByAge = new TreeSet<Member>(ageComparator);

    //subscribe to cluster changes
    @Override
    public void preStart() {
        cluster.subscribe(getSelf(), MemberEvent.class);
    }

    //re-subscribe when restart
    @Override
    public void postStop() {
        cluster.unsubscribe(getSelf());
    }

    @Override
    public void onReceive(Object message) {
        if (message instanceof StatsJob && membersByAge.isEmpty()) {
            getSender().tell(new JobFailed("Service unavailable, try again later"),
                getSelf());
        } else if (message instanceof StatsJob) {
            currentMaster().tell(message, getSender());
        }
    }
}
```

```

} else if (message instanceof CurrentClusterState) {
    CurrentClusterState state = (CurrentClusterState) message;
    List<Member> members = new ArrayList<Member>();
    for (Member m : state.getMembers()) {
        if (m.hasRole("compute")) members.add(m);
    }
    membersByAge.clear();
    membersByAge.addAll(members);

} else if (message instanceof MemberUp) {
    Member m = ((MemberUp) message).member();
    if (m.hasRole("compute")) membersByAge.add(m);

} else if (message instanceof MemberRemoved) {
    Member m = ((MemberUp) message).member();
    if (m.hasRole("compute")) membersByAge.remove(m);

} else if (message instanceof MemberEvent) {
    // not interesting

} else {
    unhandled(message);
}
}

ActorSelection currentMaster() {
    return getContext().actorSelection(membersByAge.first().address() +
        "/user singleton/statsService");
}
}
}

```

The StatsFacade receives text from users and delegates to the current StatsService, the single master. It listens to cluster events to lookup the StatsService on the oldest node.

All nodes start StatsFacade and the ClusterSingletonManager. The router is now configured like this:

```

akka.actor.deployment {
  /singleton/statsService/workerRouter {
    router = consistent-hashing
    nr-of-instances = 100
    cluster {
      enabled = on
      max-nr-of-instances-per-node = 3
      allow-local-routees = off
      use-role = compute
    }
  }
}
}

```

This example is included in akka-samples/akka-sample-cluster and you can try it by copying the source to your maven project, defined as in *A Simple Cluster Example*. Also add the akka-contrib dependency to your pom.xml.

Run it by starting nodes in different terminal windows. For example, starting 3 service nodes and 1 client:

```

mvn exec:java \
-Dexec.mainClass="sample.cluster.stats.japi.StatsSampleOneMasterMain" \
-Dexec.args="2551"

mvn exec:java \
-Dexec.mainClass="sample.cluster.stats.japi.StatsSampleOneMasterMain" \
-Dexec.args="2552"

```

```
mvn exec:java \
  -Dexec.mainClass="sample.cluster.stats.japi.StatsSampleOneMasterClientMain"

mvn exec:java \
  -Dexec.mainClass="sample.cluster.stats.japi.StatsSampleOneMasterMain"
```

Note: The above example will be simplified when the cluster handles automatic actor partitioning.

5.2.14 Cluster Metrics

The member nodes of the cluster collect system health metrics and publish them to other nodes and to registered subscribers. This information is primarily used for load-balancing routers.

Hyperic Sigar

The built-in metrics are gathered from JMX MBeans, and optionally you can use [Hyperic Sigar](#) for a wider and more accurate range of metrics compared to what can be retrieved from ordinary MBeans. Sigar is using a native OS library. To enable usage of Sigar you need to add the directory of the native library to `-Djava.library.path=<path_of_sigar_libs>` add the following dependency:

```
<dependency>
  <groupId>org.fusesource</groupId>
  <artifactId>sigar</artifactId>
  <version>1.6.4</version>
</dependency>
```

Download the native Sigar libraries from [Maven Central](#)

Adaptive Load Balancing

The `AdaptiveLoadBalancingRouter` performs load balancing of messages to cluster nodes based on the cluster metrics data. It uses random selection of routees with probabilities derived from the remaining capacity of the corresponding node. It can be configured to use a specific `MetricsSelector` to produce the probabilities, a.k.a. weights:

- `heap / HeapMetricsSelector` - Used and max JVM heap memory. Weights based on remaining heap capacity; $(\text{max} - \text{used}) / \text{max}$
- `load / SystemLoadAverageMetricsSelector` - System load average for the past 1 minute, corresponding value can be found in `top` of Linux systems. The system is possibly nearing a bottleneck if the system load average is nearing number of cpus/cores. Weights based on remaining load capacity; $1 - (\text{load} / \text{processors})$
- `cpu / CpuMetricsSelector` - CPU utilization in percentage, sum of User + Sys + Nice + Wait. Weights based on remaining cpu capacity; $1 - \text{utilization}$
- `mix / MixMetricsSelector` - Combines heap, cpu and load. Weights based on mean of remaining capacity of the combined selectors.
- Any custom implementation of `akka.cluster.routing.MetricsSelector`

The collected metrics values are smoothed with [exponential weighted moving average](#). In the *Configuration* you can adjust how quickly past data is decayed compared to new data.

Let's take a look at this router in action.

In this example the following imports are used:

```
import java.math.BigInteger;
import java.util.concurrent.Callable;
import scala.concurrent.Future;
import akka.actor.UntypedActor;
import akka.dispatch.Mapper;
import static akka.dispatch.Futures.future;
import static akka.pattern.Patterns.pipe;
```

The backend worker that performs the factorial calculation:

```
public class FactorialBackend extends UntypedActor {

    @Override
    public void onReceive(Object message) {
        if (message instanceof Integer) {
            final Integer n = (Integer) message;
            Future<BigInteger> f = future(new Callable<BigInteger>() {
                public BigInteger call() {
                    return factorial(n);
                }
            }, getContext().dispatcher());

            Future<FactorialResult> result = f.map(
                new Mapper<BigInteger, FactorialResult>() {
                    public FactorialResult apply(BigInteger factorial) {
                        return new FactorialResult(n, factorial);
                    }
                }, getContext().dispatcher());

            pipe(result, getContext().dispatcher()).to(getSender());
        } else {
            unhandled(message);
        }
    }

    BigInteger factorial(int n) {
        BigInteger acc = BigInteger.ONE;
        for (int i = 1; i <= n; ++i) {
            acc = acc.multiply(BigInteger.valueOf(i));
        }
        return acc;
    }
}
```

The frontend that receives user jobs and delegates to the backends via the router:

```
public class FactorialFrontend extends UntypedActor {
    final int upToN;
    final boolean repeat;

    LoggingAdapter log = Logging.getLogger(getContext().system(), this);

    ActorRef backend = getContext().actorOf(
        Props.empty().withRouter(FromConfig.getInstance()),
        "factorialBackendRouter");

    public FactorialFrontend(int upToN, boolean repeat) {
        this.upToN = upToN;
        this.repeat = repeat;
    }

    @Override
```

```

public void preStart() {
    sendJobs();
}

@Override
public void onReceive(Object message) {
    if (message instanceof FactorialResult) {
        FactorialResult result = (FactorialResult) message;
        if (result.n == upToN) {
            log.debug("{}! = {}", result.n, result.factorial);
            if (repeat) sendJobs();
        }
    } else {
        unhandled(message);
    }
}

void sendJobs() {
    log.info("Starting batch of factorials up to [{}]", upToN);
    for (int n = 1; n <= upToN; n++) {
        backend.tell(n, getSelf());
    }
}
}

```

As you can see, the router is defined in the same way as other routers, and in this case it is configured as follows:

```

akka.actor.deployment {
  /factorialFrontend/factorialBackendRouter = {
    router = adaptive
    # metrics-selector = heap
    # metrics-selector = load
    # metrics-selector = cpu
    metrics-selector = mix
    nr-of-instances = 100
    cluster {
      enabled = on
      routees-path = "/user/factorialBackend"
      use-role = backend
      allow-local-routees = off
    }
  }
}

```

It is only router type `adaptive` and the `metrics-selector` that is specific to this router, other things work in the same way as other routers.

The same type of router could also have been defined in code:

```

int totalInstances = 100;
String routeesPath = "/user/factorialBackend";
boolean allowLocalRoutees = true;
String useRole = "backend";
ActorRef backend = getContext().actorOf(
  Props.empty().withRouter(new ClusterRouterConfig(
    new AdaptiveLoadBalancingRouter(HeapMetricsSelector.getInstance(), 0),
    new ClusterRouterSettings(
      totalInstances, routeesPath, allowLocalRoutees, useRole))),
  "factorialBackendRouter2");

```

```

int totalInstances = 100;
int maxInstancesPerNode = 3;
boolean allowLocalRoutees = false;
String useRole = "backend";
ActorRef backend = getContext().actorOf(
  Props.create(FactorialBackend.class).withRouter(new ClusterRouterConfig(
    new AdaptiveLoadBalancingRouter(
      SystemLoadAverageMetricsSelector.getInstance(), 0),
    new ClusterRouterSettings(
      totalInstances, maxInstancesPerNode, allowLocalRoutees, useRole))),
  "factorialBackendRouter3");

```

This example is included in akka-samples/akka-sample-cluster and you can try it by copying the source to your maven project, defined as in *A Simple Cluster Example*. Run it by starting nodes in different terminal windows. For example, starting 3 backend nodes and one frontend:

```

mvn exec:java \
  -Dexec.mainClass="sample.cluster.factorial.japi.FactorialBackendMain" \
  -Dexec.args="2551"

mvn exec:java \
  -Dexec.mainClass="sample.cluster.factorial.japi.FactorialBackendMain" \
  -Dexec.args="2552"

mvn exec:java \
  -Dexec.mainClass="sample.cluster.factorial.japi.FactorialBackendMain"

mvn exec:java \
  -Dexec.mainClass="sample.cluster.factorial.japi.FactorialFrontendMain"

```

Press ctrl-c in the terminal window of the frontend to stop the factorial calculations.

Subscribe to Metrics Events

It is possible to subscribe to the metrics events directly to implement other functionality.

```

import akka.actor.UntypedActor;
import akka.cluster.Cluster;
import akka.cluster.ClusterEvent.ClusterMetricsChanged;
import akka.cluster.ClusterEvent.CurrentClusterState;
import akka.cluster.NodeMetrics;
import akka.cluster.StandardMetrics;
import akka.cluster.StandardMetrics.HeapMemory;
import akka.cluster.StandardMetrics.Cpu;
import akka.event.Logging;
import akka.event.LoggingAdapter;

public class MetricsListener extends UntypedActor {
  LoggingAdapter log = Logging.getLogger(getContext().system(), this);

  Cluster cluster = Cluster.get(getContext().system());

  //subscribe to ClusterMetricsChanged
  @Override
  public void preStart() {
    cluster.subscribe(getSelf(), ClusterMetricsChanged.class);
  }

  //re-subscribe when restart
  @Override
  public void postStop() {
    cluster.unsubscribe(getSelf());
  }
}

```

```

}

@Override
public void onReceive(Object message) {
    if (message instanceof ClusterMetricsChanged) {
        ClusterMetricsChanged clusterMetrics = (ClusterMetricsChanged) message;
        for (NodeMetrics nodeMetrics : clusterMetrics.getNodeMetrics()) {
            if (nodeMetrics.address().equals(cluster.selfAddress())) {
                logHeap(nodeMetrics);
                logCpu(nodeMetrics);
            }
        }
    }

    } else if (message instanceof CurrentClusterState) {
        // ignore

    } else {
        unhandled(message);
    }
}

void logHeap(NodeMetrics nodeMetrics) {
    HeapMemory heap = StandardMetrics.extractHeapMemory(nodeMetrics);
    if (heap != null) {
        log.info("Used heap: {} MB", ((double) heap.used()) / 1024 / 1024);
    }
}

void logCpu(NodeMetrics nodeMetrics) {
    Cpu cpu = StandardMetrics.extractCpu(nodeMetrics);
    if (cpu != null && cpu.systemLoadAverage().isDefined()) {
        log.info("Load: {} ({} processors)", cpu.systemLoadAverage().get(),
            cpu.processors());
    }
}
}

```

Custom Metrics Collector

You can plug-in your own metrics collector instead of `akka.cluster.SigarMetricsCollector` or `akka.cluster.JmxMetricsCollector`. Look at those two implementations for inspiration. The implementation class can be defined in the *Configuration*.

5.2.15 JMX

Information and management of the cluster is available as JMX MBeans with the root name `akka.Cluster`. The JMX information can be displayed with an ordinary JMX console such as JConsole or JVisualVM.

From JMX you can:

- see what members that are part of the cluster
- see status of this node
- join this node to another node in cluster
- mark any node in the cluster as down
- tell any node in the cluster to leave

Member nodes are identified by their address, in format `akka.<protocol>://<actor-system-name>@<hostname>:<port>`.

5.2.16 Command Line Management

The cluster can be managed with the script `bin/akka-cluster` provided in the Akka distribution.

Run it without parameters to see instructions about how to use the script:

```
Usage: bin/akka-cluster <node-hostname> <jmx-port> <command> ...

Supported commands are:
  join <node-url> - Sends request a JOIN node with the specified URL
  leave <node-url> - Sends a request for node with URL to LEAVE the cluster
  down <node-url> - Sends a request for marking node with URL as DOWN
  member-status - Asks the member node for its current status
  members - Asks the cluster for addresses of current members
  unreachable - Asks the cluster for addresses of unreachable members
  cluster-status - Asks the cluster for its current status (member ring,
                  unavailable nodes, meta data etc.)
  leader - Asks the cluster who the current leader is
  is-singleton - Checks if the cluster is a singleton cluster (single
                node cluster)
  is-available - Checks if the member node is available

Where the <node-url> should be on the format of
  'akka.<protocol>://<actor-system-name>@<hostname>:<port>'

Examples: bin/akka-cluster localhost 9999 is-available
          bin/akka-cluster localhost 9999 join akka.tcp://MySystem@darkstar:2552
          bin/akka-cluster localhost 9999 cluster-status
```

To be able to use the script you must enable remote monitoring and management when starting the JVMs of the cluster nodes, as described in [Monitoring and Management Using JMX Technology](#)

Example of system properties to enable remote monitoring and management:

```
java -Dcom.sun.management.jmxremote.port=9999 \
-Dcom.sun.management.jmxremote.authenticate=false \
-Dcom.sun.management.jmxremote.ssl=false
```

5.2.17 Configuration

There are several configuration properties for the cluster. We refer to the following reference file for more information:

```
#####
# Akka Cluster Reference Config File #
#####

# This is the reference config file that contains all the default settings.
# Make your edits/overrides in your application.conf.

akka {

  cluster {
    # Initial contact points of the cluster.
    # The nodes to join automatically at startup.
    # Comma separated full URIs defined by a string on the form of
    # "akka://system@hostname:port"
    # Leave as empty if the node is supposed to be joined manually.
    seed-nodes = []
```

```

# how long to wait for one of the seed nodes to reply to initial join request
seed-node-timeout = 5s

# If a join request fails it will be retried after this period.
# Disable join retry by specifying "off".
retry-unsuccessful-join-after = 10s

# Should the 'leader' in the cluster be allowed to automatically mark
# unreachable nodes as DOWN?
# Using auto-down implies that two separate clusters will automatically be
# formed in case of network partition.
auto-down = off

# The roles of this member. List of strings, e.g. roles = ["A", "B"].
# The roles are part of the membership information and can be used by
# routers or other services to distribute work to certain member types,
# e.g. front-end and back-end nodes.
roles = []

role {
  # Minimum required number of members of a certain role before the leader
  # changes member status of 'Joining' members to 'Up'. Typically used together
  # with 'Cluster.registerOnMemberUp' to defer some action, such as starting
  # actors, until the cluster has reached a certain size.
  # E.g. to require 2 nodes with role 'frontend' and 3 nodes with role 'backend':
  #   frontend.min-nr-of-members = 2
  #   backend.min-nr-of-members = 3
  #<role-name>.min-nr-of-members = 1
}

# Minimum required number of members before the leader changes member status
# of 'Joining' members to 'Up'. Typically used together with
# 'Cluster.registerOnMemberUp' to defer some action, such as starting actors,
# until the cluster has reached a certain size.
min-nr-of-members = 1

# Enable/disable info level logging of cluster events
log-info = on

# Enable or disable JMX MBeans for management of the cluster
jmx.enabled = on

# how long should the node wait before starting the periodic tasks
# maintenance tasks?
periodic-tasks-initial-delay = 1s

# how often should the node send out gossip information?
gossip-interval = 1s

# how often should the leader perform maintenance tasks?
leader-actions-interval = 1s

# how often should the node move nodes, marked as unreachable by the failure
# detector, out of the membership ring?
unreachable-nodes-reaper-interval = 1s

# How often the current internal stats should be published.
# A value of 0s can be used to always publish the stats, when it happens.
# Disable with "off".
publish-stats-interval = off

# The id of the dispatcher to use for cluster actors. If not specified
# default dispatcher is used.

```

```

# If specified you need to define the settings of the actual dispatcher.
use-dispatcher = ""

# Gossip to random node with newer or older state information, if any with
# this probability. Otherwise Gossip to any random live node.
# Probability value is between 0.0 and 1.0. 0.0 means never, 1.0 means always.
gossip-different-view-probability = 0.8

# Settings for the Phi accrual failure detector (http://ddg.jaist.ac.jp/pub/HDY+04.pdf)
# [Hayashibara et al]) used by the cluster subsystem to detect unreachable
# members.
failure-detector {

  # FQCN of the failure detector implementation.
  # It must implement akka.remote.FailureDetector and have
  # a public constructor with a com.typesafe.config.Config and
  # akka.actor.EventStream parameter.
  implementation-class = "akka.remote.PhiAccrualFailureDetector"

  # How often keep-alive heartbeat messages should be sent to each connection.
  heartbeat-interval = 1 s

  # Defines the failure detector threshold.
  # A low threshold is prone to generate many wrong suspicions but ensures
  # a quick detection in the event of a real crash. Conversely, a high
  # threshold generates fewer mistakes but needs more time to detect
  # actual crashes.
  threshold = 8.0

  # Number of the samples of inter-heartbeat arrival times to adaptively
  # calculate the failure timeout for connections.
  max-sample-size = 1000

  # Minimum standard deviation to use for the normal distribution in
  # AccrualFailureDetector. Too low standard deviation might result in
  # too much sensitivity for sudden, but normal, deviations in heartbeat
  # inter arrival times.
  min-std-deviation = 100 ms

  # Number of potentially lost/delayed heartbeats that will be
  # accepted before considering it to be an anomaly.
  # This margin is important to be able to survive sudden, occasional,
  # pauses in heartbeat arrivals, due to for example garbage collect or
  # network drop.
  acceptable-heartbeat-pause = 3 s

  # Number of member nodes that each member will send heartbeat messages to,
  # i.e. each node will be monitored by this number of other nodes.
  monitored-by-nr-of-members = 5

  # When a node stops sending heartbeats to another node it will end that
  # with this number of EndHeartbeat messages, which will remove the
  # monitoring from the failure detector.
  nr-of-end-heartbeats = 8

  # When no expected heartbeat message has been received an explicit
  # heartbeat request is sent to the node that should emit heartbeats.
  heartbeat-request {
    # Grace period until an explicit heartbeat request is sent
    grace-period = 10 s

    # After the heartbeat request has been sent the first failure detection
    # will start after this period, even though no heartbeat message has

```

```

    # been received.
    expected-response-after = 3 s

    # Cleanup of obsolete heartbeat requests
    time-to-live = 60 s
  }
}

metrics {
  # Enable or disable metrics collector for load-balancing nodes.
  enabled = on

  # FQCN of the metrics collector implementation.
  # It must implement akka.cluster.MetricsCollector and
  # have public constructor with akka.actor.ActorSystem parameter.
  # The default SigarMetricsCollector uses JMX and Hyperic SIGAR, if SIGAR
  # is on the classpath, otherwise only JMX.
  collector-class = "akka.cluster.SigarMetricsCollector"

  # How often metrics are sampled on a node.
  # Shorter interval will collect the metrics more often.
  collect-interval = 3s

  # How often a node publishes metrics information.
  gossip-interval = 3s

  # How quickly the exponential weighting of past data is decayed compared to
  # new data. Set lower to increase the bias toward newer values.
  # The relevance of each data sample is halved for every passing half-life
  # duration, i.e. after 4 times the half-life, a data sample's relevance is
  # reduced to 6% of its original relevance. The initial relevance of a data
  # sample is given by  $1 - 0.5^{(\text{collect-interval} / \text{half-life})}$ .
  # See http://en.wikipedia.org/wiki/Moving\_average#Exponential\_moving\_average
  moving-average-half-life = 12s
}

# If the tick-duration of the default scheduler is longer than the
# tick-duration configured here a dedicated scheduler will be used for
# periodic tasks of the cluster, otherwise the default scheduler is used.
# See akka.scheduler settings for more details.
scheduler {
  tick-duration = 33ms
  ticks-per-wheel = 512
}

}

# Default configuration for routers
actor.deployment.default {
  # MetricsSelector to use
  # - available: "mix", "heap", "cpu", "load"
  # - or: Fully qualified class name of the MetricsSelector class.
  #       The class must extend akka.cluster.routing.MetricsSelector
  #       and have a public constructor with com.typesafe.config.Config
  #       parameter.
  # - default is "mix"
  metrics-selector = mix
}

actor.deployment.default.cluster {
  # enable cluster aware router that deploys to nodes in the cluster
  enabled = off

  # Maximum number of routees that will be deployed on each cluster

```

```

# member node.
# Note that nr-of-instances defines total number of routees, but
# number of routees per node will not be exceeded, i.e. if you
# define nr-of-instances = 50 and max-nr-of-instances-per-node = 2
# it will deploy 2 routees per new member in the cluster, up to
# 25 members.
max-nr-of-instances-per-node = 1

# Defines if routees are allowed to be located on the same node as
# the head router actor, or only on remote nodes.
# Useful for master-worker scenario where all routees are remote.
allow-local-routees = on

# Actor path of the routees to lookup with actorFor on the member
# nodes in the cluster. E.g. "/user/my-service". If this isn't defined
# the routees will be deployed instead of looked up.
# max-nr-of-instances-per-node should not be configured (default value is 1)
# when routees-path is defined.
routees-path = ""

# Use members with specified role, or all members if undefined or empty.
use-role = ""

}

# Protobuf serializer for cluster messages
actor {
  serializers {
    akka-cluster = "akka.cluster.protobuf.ClusterMessageSerializer"
  }

  serialization-bindings {
    "akka.cluster.ClusterMessage" = akka-cluster
  }
}
}

```

Cluster Info Logging

You can silence the logging of cluster events at info level with configuration property:

```
akka.cluster.log-info = off
```

Cluster Dispatcher

Under the hood the cluster extension is implemented with actors and it can be necessary to create a bulkhead for those actors to avoid disturbance from other actors. Especially the heartbeating actors that is used for failure detection can generate false positives if they are not given a chance to run at regular intervals. For this purpose you can define a separate dispatcher to be used for the cluster actors:

```

akka.cluster.use-dispatcher = cluster-dispatcher

cluster-dispatcher {
  type = "Dispatcher"
  executor = "fork-join-executor"
  fork-join-executor {
    parallelism-min = 2
    parallelism-max = 4
  }
}

```

```
}
}
```

5.3 Remoting

For an introduction of remoting capabilities of Akka please see *Location Transparency*.

5.3.1 Preparing your ActorSystem for Remoting

The Akka remoting is a separate jar file. Make sure that you have the following dependency in your project:

```
<dependency>
  <groupId>com.typesafe.akka</groupId>
  <artifactId>akka-remote_2.10</artifactId>
  <version>2.2.5</version>
</dependency>
```

To enable remote capabilities in your Akka project you should, at a minimum, add the following changes to your `application.conf` file:

```
akka {
  actor {
    provider = "akka.remote.RemoteActorRefProvider"
  }
  remote {
    enabled-transport = ["akka.remote.netty.tcp"]
    netty.tcp {
      hostname = "127.0.0.1"
      port = 2552
    }
  }
}
```

As you can see in the example above there are four things you need to add to get started:

- Change `provider` from `akka.actor.LocalActorRefProvider` to `akka.remote.RemoteActorRefProvider`
- Add host name - the machine you want to run the actor system on; this host name is exactly what is passed to remote systems in order to identify this system and consequently used for connecting back to this system if need be, hence set it to a reachable IP address or resolvable name in case you want to communicate across the network.
- Add port number - the port the actor system should listen on, set to 0 to have it chosen automatically

Note: The port number needs to be unique for each actor system on the same machine even if the actor systems have different names. This is because each actor system has its own network subsystem listening for connections and handling messages as not to interfere with other actor systems.

The example above only illustrates the bare minimum of properties you have to add to enable remoting. All settings are described in *Remote Configuration*.

5.3.2 Looking up Remote Actors

`actorSelection(path)` will obtain an `ActorSelection` to an Actor on a remote node:

```
ActorSelection selection =
  context.actorSelection("akka.tcp://app@10.0.0.1:2552/user/serviceA/worker");
```

As you can see from the example above the following pattern is used to find an actor on a remote node:

```
akka.<protocol>://<actorsystemname>@<hostname>:<port>/<actor path>
```

Once you obtained a selection to the actor you can interact with it the same way you would with a local actor, e.g.:

```
selection.tell("Pretty awesome feature", getSelf());
```

To acquire an `ActorRef` for an `ActorSelection` you need to send a message to the selection and use the `getSender` reference of the reply from the actor. There is a built-in `Identify` message that all Actors will understand and automatically reply to with a `ActorIdentity` message containing the `ActorRef`. This can also be done with the `resolveOne` method of the `ActorSelection`, which returns a `Future` of the matching `ActorRef`.

Note: For more details on how actor addresses and paths are formed and used, please refer to [Actor References, Paths and Addresses](#).

5.3.3 Creating Actors Remotely

If you want to use the creation functionality in Akka remoting you have to further amend the `application.conf` file in the following way (only showing deployment section):

```
akka {
  actor {
    deployment {
      /sampleActor {
        remote = "akka.tcp://sampleActorSystem@127.0.0.1:2553"
      }
    }
  }
}
```

The configuration above instructs Akka to react when an actor with path `/sampleActor` is created, i.e. using `system.actorOf(new Props(...), "sampleActor")`. This specific actor will not be directly instantiated, but instead the remote daemon of the remote system will be asked to create the actor, which in this sample corresponds to `sampleActorSystem@127.0.0.1:2553`.

Once you have configured the properties above you would do the following in code:

```
ActorRef actor = system.actorOf(Props.create(SampleActor.class), "sampleActor");
actor.tell("Pretty slick", ActorRef.noSender());
```

The actor class `SampleActor` has to be available to the runtimes using it, i.e. the classloader of the actor systems has to have a JAR containing the class.

Note: In order to ensure serializability of `Props` when passing constructor arguments to the actor being created, do not make the factory a non-static inner class: this will inherently capture a reference to its enclosing object, which in most cases is not serializable. It is best to make a static inner class which implements `Creator`.

Serializability of all `Props` can be tested by setting the configuration item `akka.actor.serialize-creators=on`. Only `Props` whose `deploy` has `LocalScope` are exempt from this check.

Note: You can use asterisks as wildcard matches for the actor path sections, so you could specify: `/*/sampleActor` and that would match all `sampleActor` on that level in the hierarchy. You can also use wildcard in the last position to match all actors at a certain level: `/someParent/*`. Non-wildcard matches always have higher priority to match than wildcards, so: `/foo/bar` is considered **more specific** than `/foo/*` and only the highest priority match is used. Please note that it **cannot** be used to partially match section, like this: `/foo*/bar`, `/f*/o/bar` etc.

Programmatic Remote Deployment

To allow dynamically deployed systems, it is also possible to include deployment configuration in the `Props` which are used to create an actor: this information is the equivalent of a deployment section from the configuration file, and if both are given, the external configuration takes precedence.

With these imports:

```
import akka.actor.ActorRef;
import akka.actor.Address;
import akka.actor.AddressFromURIStrng;
import akka.actor.Deploy;
import akka.actor.Props;
import akka.actor.ActorSystem;
import akka.remote.RemoteScope;
```

and a remote address like this:

```
Address addr = new Address("akka.tcp", "sys", "host", 1234);
addr = AddressFromURIStrng.parse("akka.tcp://sys@host:1234"); // the same
```

you can advise the system to create a child on that remote node like so:

```
ActorRef ref = system.actorOf(Props.create(SampleActor.class).withDeploy(
    new Deploy(new RemoteScope(addr))));
```

5.3.4 Watching Remote Actors

Watching a remote actor is not different than watching a local actor, as described in *Lifecycle Monitoring aka DeathWatch*.

Warning: *Caveat:* Watching an `ActorRef` acquired with `actorFor` does not trigger `Terminated` for lost connections. `actorFor` is deprecated in favor of `actorSelection`. Acquire the `ActorRef` to watch with `Identify` and `ActorIdentity` as described in *Identifying Actors via Actor Selection*.

Failure Detector

Under the hood remote death watch uses heartbeat messages and a failure detector to generate `Terminated` message from network failures and JVM crashes, in addition to graceful termination of watched actor.

The heartbeat arrival times is interpreted by an implementation of [The Phi Accrual Failure Detector](#).

The suspicion level of failure is given by a value called *phi*. The basic idea of the phi failure detector is to express the value of *phi* on a scale that is dynamically adjusted to reflect current network conditions.

The value of *phi* is calculated as:


```
phi = -log10(1 - F(timeSinceLastHeartbeat))
```

where *F* is the cumulative distribution function of a normal distribution with mean and standard deviation estimated from historical heartbeat inter-arrival times.


In the *Remote Configuration* you can adjust the `akka.remote.watch-failure-detector.threshold` to define when a *phi* value is considered to be a failure.

A low threshold is prone to generate many false positives but ensures a quick detection in the event of a real crash. Conversely, a high threshold generates fewer mistakes but needs more time to detect actual crashes. The default threshold is 10 and is appropriate for most situations. However in cloud environments, such as Amazon EC2, the value could be increased to 12 in order to account for network issues that sometimes occur on such platforms.


The following chart illustrates how *phi* increase with increasing time since the previous heartbeat.

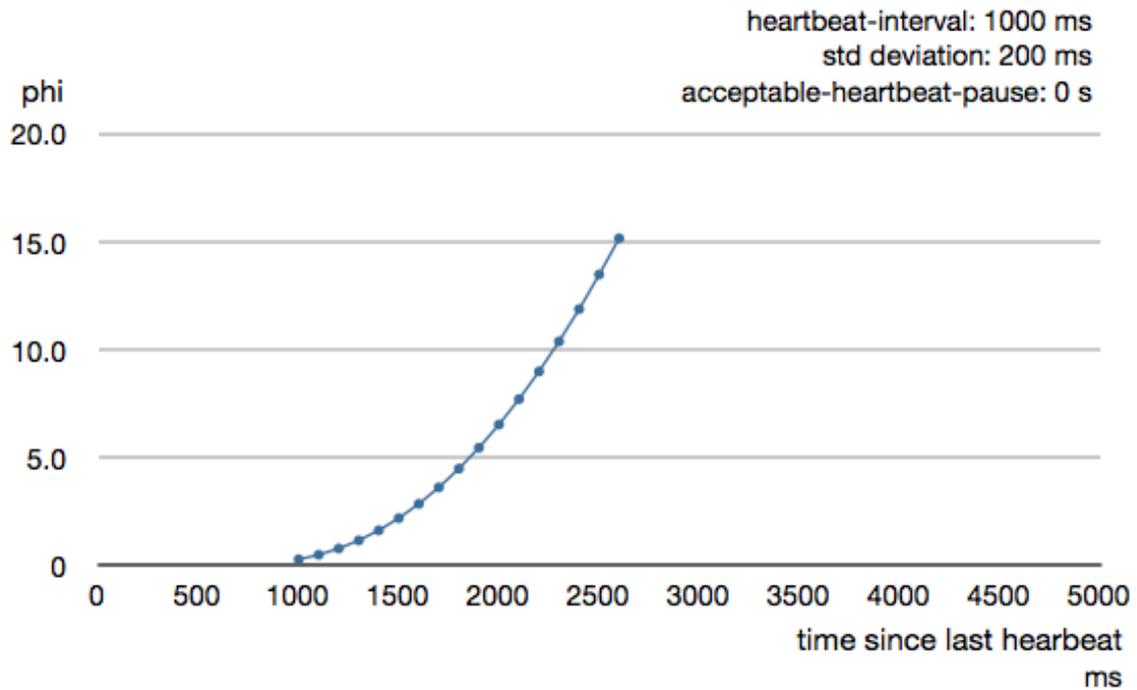

Phi is calculated from the mean and standard deviation of historical inter arrival times. The previous chart is an example for standard deviation of 200 ms. If the heartbeats arrive with less deviation the curve becomes steeper, i.e. it is possible to determine failure more quickly. The curve looks like this for a standard deviation of 100 ms.

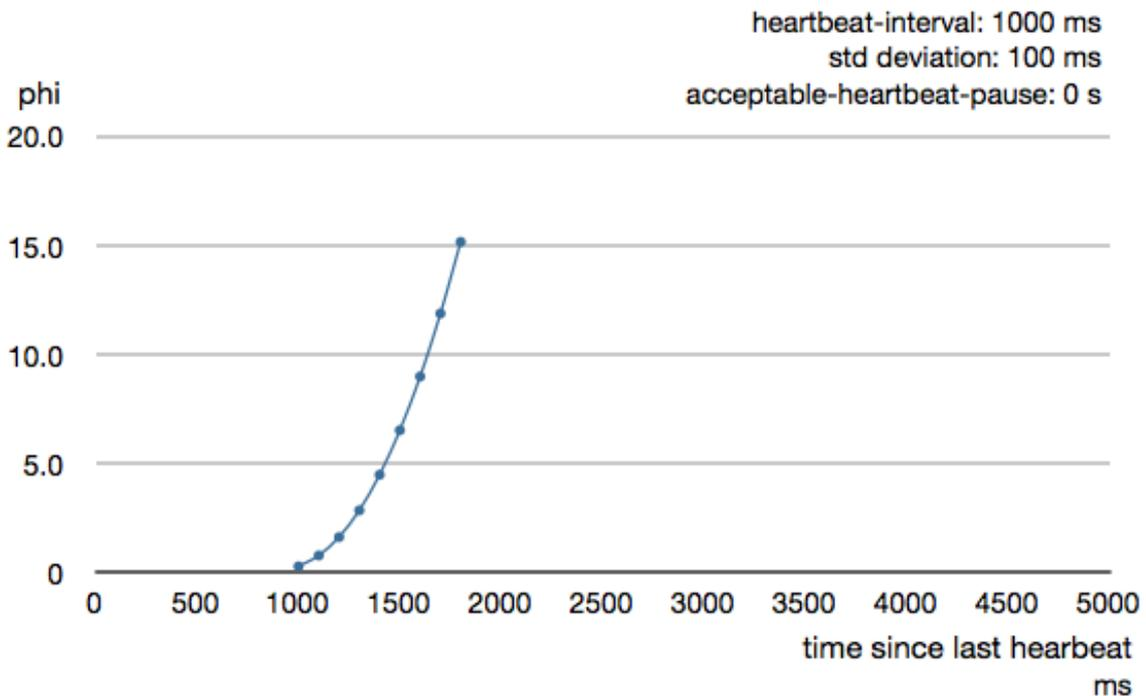

To be able to survive sudden abnormalities, such as garbage collection pauses and transient network failures the failure detector is configured with a margin, `akka.remote.watch-failure-detector.acceptable-heartbeat-pause`. You may want to adjust the *Remote Configuration* of this depending on you environment. This is how the curve looks like for `acceptable-heartbeat-pause` configured to 3 seconds.

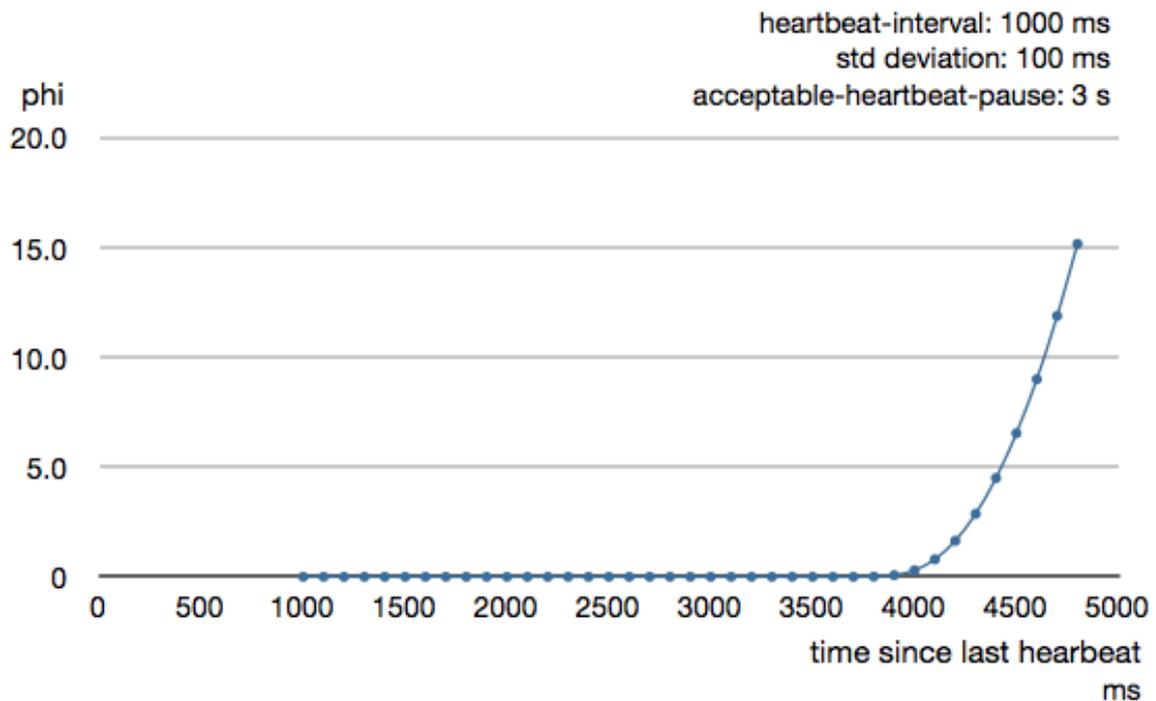

5.3.5 Serialization

When using remoting for actors you must ensure that the `props` and `messages` used for those actors are serializable. Failing to do so will cause the system to behave in an unintended way.

For more information please see *Serialization*

5.3.6 Routers with Remote Destinations

It is absolutely feasible to combine remoting with *Routing*. This is also done via configuration:

```
akka {
  actor {
    deployment {
      /serviceA/aggregation {
        router = "round-robin"
        nr-of-instances = 10
        target {
          nodes = ["akka.tcp://app@10.0.0.2:2552", "akka://app@10.0.0.3:2552"]
        }
      }
    }
  }
}
```

This configuration setting will clone the actor “aggregation” 10 times and deploy it evenly distributed across the two given target nodes.

5.3.7 Description of the Remoting Sample

There is a more extensive remote example that comes with the Akka distribution. Please have a look here for more information: [Remote Sample](#) This sample demonstrates both, remote deployment and look-up of remote actors. First, let us have a look at the common setup for both scenarios (this is `common.conf`):

```
akka {
  actor {
    provider = "akka.remote.RemoteActorRefProvider"
  }

  remote {
    netty.tcp {
      hostname = "127.0.0.1"
    }
  }

  # Uncomment the following four lines to employ the 'secure cookie handshake'
  # This requires the client to have the known secure-cookie and properly
  # transmit it to the server upon connection. Because both the client and server
  # programs use this common.conf file, they will both have the cookie
  #remote {
  #  secure-cookie = "0009090D040C030E03070D0509020F050B080400"
  #  require-cookie = on
  #}
}
```

This enables the remoting by installing the `RemoteActorRefProvider` and chooses the default remote transport. All other options will be set specifically for each show case.

Note: Be sure to replace the default IP `127.0.0.1` with the real address the system is reachable by if you deploy onto multiple machines!

Remote Lookup

In order to look up a remote actor, that one must be created first. For this purpose, we configure an actor system to listen on port 2552 (this is a snippet from `application.conf`):

```
calculator {
  include "common"

  akka {
    # LISTEN on tcp port 2552
    remote.netty.tcp.port = 2552
  }
}
```

Then the actor must be created. For all code which follows, assume these imports:

```
import akka.actor.ActorRef;
import akka.actor.ActorSystem;
import akka.actor.Props;
import akka.actor.UntypedActor;
import akka.kernel.Bootable;
import com.typesafe.config.ConfigFactory;
```

The actor doing the work will be this one:

```
public class JSimpleCalculatorActor extends UntypedActor {
  @Override
  public void onReceive(Object message) {

    if (message instanceof Op.Add) {
      Op.Add add = (Op.Add) message;
      System.out.println("Calculating " + add.getN1() + " + " + add.getN2());
      getSender().tell(new Op.AddResult (
```

```

        add.getN1(), add.getN2(), add.getN1() + add.getN2()),
        getSelf());

    } else if (message instanceof Op.Subtract) {
        Op.Subtract subtract = (Op.Subtract) message;
        System.out.println("Calculating " + subtract.getN1() + " - " +
            subtract.getN2());
        getSender().tell(new Op.SubtractResult(
            subtract.getN1(), subtract.getN2(), subtract.getN1() - subtract.getN2()),
            getSelf());
    } else {
        unhandled(message);
    }
}
// #actor

```

and we start it within an actor system using the above configuration

```

public class JCalculatorApplication implements Bootable {
    private ActorSystem system;

    public JCalculatorApplication() {
        system = ActorSystem.create("CalculatorApplication", ConfigFactory.load()
            .getConfig("calculator"));
        ActorRef actor = system.actorOf(Props.create(JSimpleCalculatorActor.class),
            "simpleCalculator");
    }

    @Override
    public void startup() {
    }

    @Override
    public void shutdown() {
        system.shutdown();
    }
}
// #setup

```

With the service actor up and running, we may look it up from another actor system, which will be configured to use port 2553 (this is a snippet from `application.conf`).

```

remotelookup {
    include "common"

    akka {
        remote.netty.tcp.port = 2553
    }
}

```

The actor which will query the calculator is a quite simple one for demonstration purposes

```

public class JLookupActor extends UntypedActor {

    private final String path;
    private ActorRef remoteActor = null;

    public JLookupActor(String path) {
        this.path = path;
        sendIdentifyRequest();
    }
}

```

```

private void sendIdentifyRequest() {
    getContext().actorSelection(path).tell(new Identify(path), getSelf());
}

@Override
public void onReceive(Object message) throws Exception {

    if (message instanceof ActorIdentity) {
        remoteActor = ((ActorIdentity) message).getRef();
    } else if (message.equals(ReceiveTimeout.getInstance())) {
        sendIdentifyRequest();
    } else if (remoteActor == null) {
        System.out.println("Not ready yet");
    } else if (message instanceof Op.MathOp) {
        // send message to server actor
        remoteActor.tell(message, getSelf());
    } else if (message instanceof Op.AddResult) {
        Op.AddResult result = (Op.AddResult) message;
        System.out.printf("Add result: %d + %d = %d\n", result.getN1(),
            result.getN2(), result.getResult());
    } else if (message instanceof Op.SubtractResult) {
        Op.SubtractResult result = (Op.SubtractResult) message;
        System.out.printf("Sub result: %d - %d = %d\n", result.getN1(),
            result.getN2(), result.getResult());
    } else {
        unhandled(message);
    }
}
}

```

and it is created from an actor system using the aforementioned client's config.

```

public class JLookupApplication implements Bootable {
    private ActorSystem system;
    private ActorRef actor;

    public JLookupApplication() {
        system = ActorSystem.create("LookupApplication", ConfigFactory.load().getConfig(
            "remotelookup"));
        final String path =
            "akka.tcp://CalculatorApplication@127.0.0.1:2552/user/simpleCalculator";
        actor = system.actorOf(Props.create(JLookupActor.class, path), "lookupActor");
    }

    public void doSomething(Op.MathOp mathOp) {
        actor.tell(mathOp, null);
    }

    @Override
    public void startup() {
    }

    @Override
    public void shutdown() {
        system.shutdown();
    }
}

```

```
// #setup
```

Requests which come in via `doSomething` will be sent to the client actor, which will use the actor reference that was identified earlier. Observe how the actor system name using in `actorSelection` matches the remote system's name, as do IP and port number. Top-level actors are always created below the `"/user"` guardian, which supervises them.

Remote Deployment

Creating remote actors instead of looking them up is not visible in the source code, only in the configuration file. This section is used in this scenario (this is a snippet from `application.conf`):

```
remotecreation {
  include "common"

  akka {
    actor {
      deployment {
        /advancedCalculator {
          remote = "akka.tcp://CalculatorApplication@127.0.0.1:2552"
        }
      }
    }
  }

  remote.netty.tcp.port = 2554
}
```

For all code which follows, assume these imports:

```
import akka.actor.ActorRef;
import akka.actor.ActorSystem;
import akka.actor.Props;
import akka.actor.UntypedActor;
import akka.kernel.Bootable;
import com.typesafe.config.ConfigFactory;
```

The server actor can multiply or divide numbers:

```
public class JAdvancedCalculatorActor extends UntypedActor {
  @Override
  public void onReceive(Object message) throws Exception {

    if (message instanceof Op.Multiply) {
      Op.Multiply multiply = (Op.Multiply) message;
      System.out.println("Calculating " + multiply.getN1() + " * "
        + multiply.getN2());
      getSender().tell(
        new Op.MultiplicationResult(multiply.getN1(), multiply.getN2(),
          multiply.getN1() * multiply.getN2()), getSelf());
    } else if (message instanceof Op.Divide) {
      Op.Divide divide = (Op.Divide) message;
      System.out.println("Calculating " + divide.getN1() + " / "
        + divide.getN2());
      getSender().tell(
        new Op.DivisionResult(divide.getN1(), divide.getN2(), divide.getN1()
          / divide.getN2()), getSelf());
    } else {
      unhandled(message);
    }
  }
}
```

```

    }
  }
  // #actor

```

The client actor looks like in the previous example

```

public class JCreationActor extends UntypedActor {

    private final ActorRef remoteActor;

    public JCreationActor(ActorRef remoteActor) {
        this.remoteActor = remoteActor;
    }

    @Override
    public void onReceive(Object message) throws Exception {

        if (message instanceof Op.MathOp) {
            // send message to server actor
            remoteActor.tell(message, getSelf());
        } else if (message instanceof Op.MultiplicationResult) {
            Op.MultiplicationResult result = (Op.MultiplicationResult) message;
            System.out.printf("Mul result: %d * %d = %d\n",
                result.getN1(), result.getN2(), result.getResult());
        } else if (message instanceof Op.DivisionResult) {
            Op.DivisionResult result = (Op.DivisionResult) message;
            System.out.printf("Div result: %.0f / %d = %.2f\n",
                result.getN1(), result.getN2(), result.getResult());
        } else {
            unhandled(message);
        }
    }
}

```

but the setup uses only actorOf:

```

public class JCreationApplication implements Bootable {
    private ActorSystem system;
    private ActorRef actor;

    public JCreationApplication() {
        system = ActorSystem.create("CreationApplication", ConfigFactory.load()
            .getConfig("remotecreation"));
        final ActorRef remoteActor = system.actorOf(Props.create(
            JAdvancedCalculatorActor.class), "advancedCalculator");
        actor = system.actorOf(Props.create(JCreationActor.class, remoteActor),
            "creationActor");
    }

    public void doSomething(Op.MathOp mathOp) {
        actor.tell(mathOp, null);
    }

    @Override
    public void startup() {
    }

    @Override
    public void shutdown() {
    }
}

```

```

    system.shutdown();
  }
}

```

Observe how the name of the server actor matches the deployment given in the configuration file, which will transparently delegate the actor creation to the remote node.

Pluggable transport support

Akka can be configured to use various transports to communicate with remote systems. The core component of this feature is the `akka.remote.Transport` SPI. Transport implementations must extend this trait. Transports can be loaded by setting the `akka.remote.enabled-transports` configuration key to point to one or more configuration sections containing driver descriptions.

An example of setting up the default Netty based SSL driver as default:

```

akka {
  remote {
    enabled-transports = [akka.remote.netty.ssl]

    netty.ssl.security {
      key-store = "mykeystore"
      trust-store = "mytruststore"
      key-store-password = "changeme"
      key-password = "changeme"
      trust-store-password = "changeme"
      protocol = "TLSv1"
      random-number-generator = "AES128CounterSecureRNG"
      enabled-algorithms = [TLS_RSA_WITH_AES_128_CBC_SHA]
    }
  }
}

```

An example of setting up a custom transport implementation:

```

akka {
  remote {
    applied-transports = ["akka.remote.mytransport"]

    mytransport {
      # The transport-class configuration entry is required, and
      # it must contain the fully qualified name of the transport
      # implementation
      transport-class = "my.package.MyTransport"

      # It is possible to decorate Transports with additional services.
      # Adapters should be registered in the "adapters" sections to
      # be able to apply them to transports
      applied-adapters = []

      # Driver specific configuration options has to be in the same
      # section:
      some-config = foo
      another-config = bar
    }
  }
}

```

Remote Events

It is possible to listen to events that occur in Akka Remote, and to subscribe/unsubscribe to these events you simply register as listener to the below described types in on the `ActorSystem.eventStream`.

Note: To subscribe to any remote event, subscribe to `RemotingLifecycleEvent`. To subscribe to events related only to the lifecycle of associations, subscribe to `akka.remote.AssociationEvent`.

Note: The use of term “Association” instead of “Connection” reflects that the remoting subsystem may use connectionless transports, but an association similar to transport layer connections is maintained between endpoints by the Akka protocol.

By default an event listener is registered which logs all of the events described below. This default was chosen to help setting up a system, but it is quite common to switch this logging off once that phase of the project is finished.

Note: In order to switch off the logging, set `akka.remote.log-remote-lifecycle-events = off` in your `application.conf`.

To be notified when an association is over (“disconnected”) listen to `DisassociatedEvent` which holds the direction of the association (inbound or outbound) and the addresses of the involved parties.

To be notified when an association is successfully established (“connected”) listen to `AssociatedEvent` which holds the direction of the association (inbound or outbound) and the addresses of the involved parties.

To intercept errors directly related to associations, listen to `AssociationErrorEvent` which holds the direction of the association (inbound or outbound), the addresses of the involved parties and the `Throwable` cause.

To be notified when the remoting subsystem is ready to accept associations, listen to `RemotingListenEvent` which contains the addresses the remoting listens on.

To be notified when the remoting subsystem has been shut down, listen to `RemotingShutdownEvent`.

To intercept generic remoting related errors, listen to `RemotingErrorEvent` which holds the `Throwable` cause.

5.3.8 Remote Security

Akka provides a couple of ways to enhance security between remote nodes (client/server):

- Untrusted Mode
- Security Cookie Handshake

Untrusted Mode

As soon as an actor system can connect to another remotely, it may in principle send any possible message to any actor contained within that remote system. One example may be sending a `PoisonPill` to the system guardian, shutting that system down. This is not always desired, and it can be disabled with the following setting:

```
akka.remote.untrusted-mode = on
```

This disallows sending of system messages (actor life-cycle commands, `DeathWatch`, etc.) and any message extending `PossiblyHarmful` to the system on which this flag is set. Should a client send them nonetheless they are dropped and logged (at `DEBUG` level in order to reduce the possibilities for a denial of service attack). `PossiblyHarmful` covers the predefined messages like `PoisonPill` and `Kill`, but it can also be added as a marker trait to user-defined messages.

In summary, the following operations are ignored by a system configured in untrusted mode when incoming via the remoting layer:

- remote deployment (which also means no remote supervision)
- remote `DeathWatch`
- `system.stop()`, `PoisonPill`, `Kill`

- sending any message which extends from the `PossiblyHarmful` marker interface, which includes `Terminated`

Note: Enabling the untrusted mode does not remove the capability of the client to freely choose the target of its message sends, which means that messages not prohibited by the above rules can be sent to any actor in the remote system. It is good practice for a client-facing system to only contain a well-defined set of entry point actors, which then forward requests (possibly after performing validation) to another actor system containing the actual worker actors. If messaging between these two server-side systems is done using local `ActorRef` (they can be exchanged safely between actor systems within the same JVM), you can restrict the messages on this interface by marking them `PossiblyHarmful` so that a client cannot forge them.

Secure Cookie Handshake

Akka remoting also allows you to specify a secure cookie that will be exchanged and ensured to be identical in the connection handshake between the client and the server. If they are not identical then the client will be refused to connect to the server.

The secure cookie can be any kind of string. But the recommended approach is to generate a cryptographically secure cookie using this script `$AKKA_HOME/scripts/generate_config_with_secure_cookie.sh` or from code using the `akka.util.Crypt.generateSecureCookie()` utility method.

You have to ensure that both the connecting client and the server have the same secure cookie as well as the `require-cookie` option turned on.

Here is an example config:

```
akka.remote {
  secure-cookie = "090A030E0F0A05010900000A0C0E0C0B03050D05"
  require-cookie = on
}
```

SSL

SSL can be used as the remote transport by adding `akka.remote.netty.ssl` to the `enabled-transport` configuration section. See a description of the settings in the [Remote Configuration](#) section.

The SSL support is implemented with Java Secure Socket Extension, please consult the official [Java Secure Socket Extension documentation](#) and related resources for troubleshooting.

Note: When using `SHA1PRNG` on Linux it's recommended specify `-Djava.security.egd=file:/dev/./urandom` as argument to the JVM to prevent blocking. It is NOT as secure because it reuses the seed. Use `'/dev/urandom'`, not `'/dev/urandom'` as that doesn't work according to [Bug ID: 6202721](#).

5.3.9 Remote Configuration

There are lots of configuration properties that are related to remoting in Akka. We refer to the following reference file for more information:

```
#####
# Akka Remote Reference Config File #
#####

# This is the reference config file that contains all the default settings.
# Make your edits/overrides in your application.conf.

# comments about akka.actor settings left out where they are already in akka-
# actor.jar, because otherwise they would be repeated in config rendering.
```

```

akka {

  actor {

    serializers {
      akka-containers = "akka.remote.serialization.MessageContainerSerializer"
      proto = "akka.remote.serialization.ProtobufSerializer"
      daemon-create = "akka.remote.serialization.DaemonMsgCreateSerializer"
    }

    serialization-bindings {
      # Since com.google.protobuf.Message does not extend Serializable but
      # GeneratedMessage does, need to use the more specific one here in order
      # to avoid ambiguity
      "akka.actor.SelectionPath" = akka-containers
      "com.google.protobuf.GeneratedMessage" = proto
      "akka.remote.DaemonMsgCreate" = daemon-create
    }

    deployment {

      default {

        # if this is set to a valid remote address, the named actor will be
        # deployed at that node e.g. "akka://sys@host:port"
        remote = ""

        target {

          # A list of hostnames and ports for instantiating the children of a
          # router
          # The format should be on "akka://sys@host:port", where:
          # - sys is the remote actor system name
          # - hostname can be either hostname or IP address the remote actor
          # should connect to
          # - port should be the port for the remote server on the other node
          # The number of actor instances to be spawned is still taken from the
          # nr-of-instances setting as for local routers; the instances will be
          # distributed round-robin among the given nodes.
          nodes = []

        }
      }
    }
  }

  remote {

    ### General settings

    # Timeout after which the startup of the remoting subsystem is considered
    # to be failed. Increase this value if your transport drivers (see the
    # enabled-transport section) need longer time to be loaded.
    startup-timeout = 10 s

    # Timeout after which the graceful shutdown of the remoting subsystem is
    # considered to be failed. After the timeout the remoting system is
    # forcefully shut down. Increase this value if your transport drivers
    # (see the enabled-transport section) need longer time to stop properly.
    shutdown-timeout = 10 s
  }
}

```

```

# Before shutting down the drivers, the remoting subsystem attempts to flush
# all pending writes. This setting controls the maximum time the remoting is
# willing to wait before moving on to shut down the drivers.
flush-wait-on-shutdown = 2 s

# Reuse inbound connections for outbound messages
use-passive-connections = on

# Controls the backoff interval after a refused write is reattempted.
# (Transports may refuse writes if their internal buffer is full)
backoff-interval = 0.01 s

# Acknowledgment timeout of management commands sent to the transport stack.
command-ack-timeout = 30 s

# If set to a nonempty string remoting will use the given dispatcher for
# its internal actors otherwise the default dispatcher is used. Please note
# that since remoting can load arbitrary 3rd party drivers (see
# "enabled-transport" and "adapters" entries) it is not guaranteed that
# every module will respect this setting.
use-dispatcher = ""

### Security settings

# Enable untrusted mode for full security of server managed actors, prevents
# system messages to be send by clients, e.g. messages like 'Create',
# 'Suspend', 'Resume', 'Terminate', 'Supervise', 'Link' etc.
untrusted-mode = off

# Should the remote server require that its peers share the same
# secure-cookie (defined in the 'remote' section)? Secure cookies are passed
# between during the initial handshake. Connections are refused if the initial
# message contains a mismatching cookie or the cookie is missing.
require-cookie = off

# Generate your own with the script availbale in
# '$AKKA_HOME/scripts/generate_config_with_secure_cookie.sh' or using
# 'akka.util.Crypt.generateSecureCookie'
secure-cookie = ""

### Logging

# If this is "on", Akka will log all inbound messages at DEBUG level,
# if off then they are not logged
log-received-messages = off

# If this is "on", Akka will log all outbound messages at DEBUG level,
# if off then they are not logged
log-sent-messages = off

# Sets the log granularity level at which Akka logs remoting events. This setting
# can take the values OFF, ERROR, WARNING, INFO, DEBUG, or ON. For compatibility
# reasons the setting "on" will default to "debug" level. Please note that the effective
# logging level is still determined by the global logging level of the actor system:
# for example debug level remoting events will be only logged if the system
# is running with debug level logging.
# Failures to deserialize received messages also fall under this flag.
log-remote-lifecycle-events = on

# Logging of message types with payload size in bytes larger than
# this value. Maximum detected size per message type is logged once,
# with an increase threshold of 10%.
# By default this feature is turned off. Activate it by setting the property to

```

```

# a value in bytes, such as 1000b. Note that for all messages larger than this
# limit there will be extra performance and scalability cost.
log-frame-size-exceeding = off

### Failure detection and recovery

# Settings for the Phi accrual failure detector (http://ddg.jaist.ac.jp/pub/HDY+04.pdf
# [Hayashibara et al]) used by the remoting subsystem to detect failed
# connections.
transport-failure-detector {

    # FQCN of the failure detector implementation.
    # It must implement akka.remote.FailureDetector and have
    # a public constructor with a com.typesafe.config.Config and
    # akka.actor.EventStream parameter.
    implementation-class = "akka.remote.PhiAccrualFailureDetector"

    # How often keep-alive heartbeat messages should be sent to each connection.
    heartbeat-interval = 1 s

    # Defines the failure detector threshold.
    # A low threshold is prone to generate many wrong suspicions but ensures
    # a quick detection in the event of a real crash. Conversely, a high
    # threshold generates fewer mistakes but needs more time to detect
    # actual crashes.
    threshold = 7.0

    # Number of the samples of inter-heartbeat arrival times to adaptively
    # calculate the failure timeout for connections.
    max-sample-size = 100

    # Minimum standard deviation to use for the normal distribution in
    # AccrualFailureDetector. Too low standard deviation might result in
    # too much sensitivity for sudden, but normal, deviations in heartbeat
    # inter arrival times.
    min-std-deviation = 100 ms

    # Number of potentially lost/delayed heartbeats that will be
    # accepted before considering it to be an anomaly.
    # This margin is important to be able to survive sudden, occasional,
    # pauses in heartbeat arrivals, due to for example garbage collect or
    # network drop.
    acceptable-heartbeat-pause = 3 s
}

# Settings for the Phi accrual failure detector (http://ddg.jaist.ac.jp/pub/HDY+04.pdf
# [Hayashibara et al]) used for remote death watch.
watch-failure-detector {

    # FQCN of the failure detector implementation.
    # It must implement akka.remote.FailureDetector and have
    # a public constructor with a com.typesafe.config.Config and
    # akka.actor.EventStream parameter.
    implementation-class = "akka.remote.PhiAccrualFailureDetector"

    # How often keep-alive heartbeat messages should be sent to each connection.
    heartbeat-interval = 1 s

    # Defines the failure detector threshold.
    # A low threshold is prone to generate many wrong suspicions but ensures
    # a quick detection in the event of a real crash. Conversely, a high
    # threshold generates fewer mistakes but needs more time to detect
    # actual crashes.

```

```

threshold = 10.0

# Number of the samples of inter-heartbeat arrival times to adaptively
# calculate the failure timeout for connections.
max-sample-size = 200

# Minimum standard deviation to use for the normal distribution in
# AccrualFailureDetector. Too low standard deviation might result in
# too much sensitivity for sudden, but normal, deviations in heartbeat
# inter arrival times.
min-std-deviation = 100 ms

# Number of potentially lost/delayed heartbeats that will be
# accepted before considering it to be an anomaly.
# This margin is important to be able to survive sudden, occasional,
# pauses in heartbeat arrivals, due to for example garbage collect or
# network drop.
acceptable-heartbeat-pause = 4 s

# How often to check for nodes marked as unreachable by the failure
# detector
unreachable-nodes-reaper-interval = 1s

# After the heartbeat request has been sent the first failure detection
# will start after this period, even though no heartbeat message has
# been received.
expected-response-after = 3 s

}

# After failed to establish an outbound connection, the remoting will mark the
# address as failed. This configuration option controls how much time should
# be elapsed before reattempting a new connection. While the address is
# gated, all messages sent to the address are delivered to dead-letters.
# If this setting is 0, the remoting will always immediately reattempt
# to establish a failed outbound connection and will buffer writes until
# it succeeds.
retry-gate-closed-for = 0 s

# If the retry gate function is disabled (see retry-gate-closed-for) the
# remoting subsystem will always attempt to reestablish failed outbound
# connections. The settings below together control the maximum number of
# reattempts in a given time window. The number of reattempts during
# a window of "retry-window" will be maximum "maximum-retries-in-window".
retry-window = 60 s
maximum-retries-in-window = 3

# The length of time to gate an address whose name lookup has failed
# or has explicitly signalled that it will not accept connections
# (remote system is shutting down or the requesting system is quarantined).
# No connection attempts will be made to an address while it remains
# gated. Any messages sent to a gated address will be directed to dead
# letters instead. Name lookups are costly, and the time to recovery
# is typically large, therefore this setting should be a value in the
# order of seconds or minutes.
gate-invalid-addresses-for = 60 s

# This settings controls how long a system will be quarantined after
# catastrophic communication failures that result in the loss of system
# messages. Quarantining prevents communication with the remote system
# of a given UID. This function can be disabled by setting the value
# to "off".

```

```

quarantine-systems-for = 60s

# This setting defines the maximum number of unacknowledged system messages
# allowed for a remote system. If this limit is reached the remote system is
# declared to be dead and its UID marked as tainted.
system-message-buffer-size = 1000

# This setting defines the maximum idle time after an individual
# acknowledgement for system messages is sent. System message delivery
# is guaranteed by explicit acknowledgement messages. These acks are
# piggybacked on ordinary traffic messages. If no traffic is detected
# during the time period configured here, the remoting will send out
# an individual ack.
system-message-ack-piggyback-timeout = 1 s

# This setting defines the time after messages that have not been
# explicitly acknowledged or negatively acknowledged are resent.
# Messages that were negatively acknowledged are always immediately
# resent.
resend-interval = 1 s

### Transports and adapters

# List of the transport drivers that will be loaded by the remoting.
# A list of fully qualified config paths must be provided where
# the given configuration path contains a transport-class key
# pointing to an implementation class of the Transport interface.
# If multiple transports are provided, the address of the first
# one will be used as a default address.
enabled-transports = ["akka.remote.netty.tcp"]

# Transport drivers can be augmented with adapters by adding their
# name to the applied-adapters setting in the configuration of a
# transport. The available adapters should be configured in this
# section by providing a name, and the fully qualified name of
# their corresponding implementation. The class given here
# must implement akka.akka.remote.transport.TransportAdapterProvider
# and have public constructor without parameters.
adapters {
  gremlin = "akka.remote.transport.FailureInjectorProvider"
  trttl = "akka.remote.transport.ThrottlerProvider"
}

### Default configuration for the Netty based transport drivers

netty.tcp {
  # The class given here must implement the akka.remote.transport.Transport
  # interface and offer a public constructor which takes two arguments:
  # 1) akka.actor.ExtendedActorSystem
  # 2) com.typesafe.config.Config
  transport-class = "akka.remote.transport.netty.NettyTransport"

  # Transport drivers can be augmented with adapters by adding their
  # name to the applied-adapters list. The last adapter in the
  # list is the adapter immediately above the driver, while
  # the first one is the top of the stack below the standard
  # Akka protocol
  applied-adapters = []

  transport-protocol = tcp

  # The default remote server port clients should connect to.
  # Default is 2552 (AKKA), use 0 if you want a random available port

```

```

# This port needs to be unique for each actor system on the same machine.
port = 2552

# The hostname or ip to bind the remoting to,
# InetAddress.getLocalHost.getHostAddress is used if empty
hostname = ""

# Enables SSL support on this transport
enable-ssl = false

# Sets the connectTimeoutMillis of all outbound connections,
# i.e. how long a connect may take until it is timed out
connection-timeout = 15 s

# If set to "<id.of.dispatcher>" then the specified dispatcher
# will be used to accept inbound connections, and perform IO. If "" then
# dedicated threads will be used.
# Please note that the Netty driver only uses this configuration and does
# not read the "akka.remote.use-dispatcher" entry. Instead it has to be
# configured manually to point to the same dispatcher if needed.
use-dispatcher-for-io = ""

# Sets the high water mark for the in and outbound sockets,
# set to 0b for platform default
write-buffer-high-water-mark = 0b

# Sets the low water mark for the in and outbound sockets,
# set to 0b for platform default
write-buffer-low-water-mark = 0b

# Sets the send buffer size of the Sockets,
# set to 0b for platform default
send-buffer-size = 256000b

# Sets the receive buffer size of the Sockets,
# set to 0b for platform default
receive-buffer-size = 256000b

# Maximum message size the transport will accept, but at least
# 32000 bytes.
# Please note that UDP does not support arbitrary large datagrams,
# so this setting has to be chosen carefully when using UDP.
# Both send-buffer-size and receive-buffer-size settings has to
# be adjusted to be able to buffer messages of maximum size.
maximum-frame-size = 128000b

# Sets the size of the connection backlog
backlog = 4096

# Enables the TCP_NODELAY flag, i.e. disables Nagle's algorithm
tcp-nodelay = on

# Enables TCP Keepalive, subject to the O/S kernel's configuration
tcp-keepalive = on

# Enables SO_REUSEADDR, which determines when an ActorSystem can open
# the specified listen port (the meaning differs between *nix and Windows)
# Valid values are "on", "off" and "off-for-windows"
# due to the following Windows bug: http://bugs.sun.com/bugdatabase/view\_bug.do?bug\_id=4476
# "off-for-windows" of course means that it's "on" for all other platforms
tcp-reuse-addr = off-for-windows

# Used to configure the number of I/O worker threads on server sockets

```

```

server-socket-worker-pool {
  # Min number of threads to cap factor-based number to
  pool-size-min = 2

  # The pool size factor is used to determine thread pool size
  # using the following formula: ceil(available processors * factor).
  # Resulting size is then bounded by the pool-size-min and
  # pool-size-max values.
  pool-size-factor = 1.0

  # Max number of threads to cap factor-based number to
  pool-size-max = 2
}

# Used to configure the number of I/O worker threads on client sockets
client-socket-worker-pool {
  # Min number of threads to cap factor-based number to
  pool-size-min = 2

  # The pool size factor is used to determine thread pool size
  # using the following formula: ceil(available processors * factor).
  # Resulting size is then bounded by the pool-size-min and
  # pool-size-max values.
  pool-size-factor = 1.0

  # Max number of threads to cap factor-based number to
  pool-size-max = 2
}

}

netty.udp = ${akka.remote.netty.tcp}
netty.udp {
  transport-protocol = udp
}

netty.ssl = ${akka.remote.netty.tcp}
netty.ssl = {
  # Enable SSL/TLS encryption.
  # This must be enabled on both the client and server to work.
  enable-ssl = true

  security {
    # This is the Java Key Store used by the server connection
    key-store = "keystore"

    # This password is used for decrypting the key store
    key-store-password = "changeme"

    # This password is used for decrypting the key
    key-password = "changeme"

    # This is the Java Key Store used by the client connection
    trust-store = "truststore"

    # This password is used for decrypting the trust store
    trust-store-password = "changeme"

    # Protocol to use for SSL encryption, choose from:
    # Java 6 & 7:
    #   'SSLv3', 'TLSv1'
    # Java 7:

```

```

# 'TLSv1.1', 'TLSv1.2'
protocol = "TLSv1"

# Example: ["TLS_RSA_WITH_AES_128_CBC_SHA", "TLS_RSA_WITH_AES_256_CBC_SHA"]
# You need to install the JCE Unlimited Strength Jurisdiction Policy
# Files to use AES 256.
# More info here:
# http://docs.oracle.com/javase/7/docs/technotes/guides/security/SunProviders.html#SunJCE
enabled-algorithms = ["TLS_RSA_WITH_AES_128_CBC_SHA"]

# There are three options, in increasing order of security:
# "" or SecureRandom => (default)
# "SHA1PRNG" => Can be slow because of blocking issues on Linux
# "AES128CounterSecureRNG" => fastest startup and based on AES encryption
# algorithm
# "AES256CounterSecureRNG"
# The following use one of 3 possible seed sources, depending on
# availability: /dev/random, random.org and SecureRandom (provided by Java)
# "AES128CounterInetRNG"
# "AES256CounterInetRNG" (Install JCE Unlimited Strength Jurisdiction
# Policy Files first)
# Setting a value here may require you to supply the appropriate cipher
# suite (see enabled-algorithms section above)
random-number-generator = ""
}
}

### Default configuration for the failure injector transport adapter

gremlin {
  # Enable debug logging of the failure injector transport adapter
  debug = off
}

}
}

```

Note: Setting properties like the listening IP and port number programmatically is best done by using something like the following:

```

ConfigFactory.parseString("akka.remote.netty.tcp.hostname=\"1.2.3.4\"")
  .withFallback(ConfigFactory.load());

```

5.4 Serialization

Akka has a built-in Extension for serialization, and it is both possible to use the built-in serializers and to write your own.

The serialization mechanism is both used by Akka internally to serialize messages, and available for ad-hoc serialization of whatever you might need it for.

5.4.1 Usage

Configuration

For Akka to know which Serializer to use for what, you need edit your *Configuration*, in the “akka.actor.serializers”-section you bind names to implementations of the

`akka.serialization.Serializer` you wish to use, like this:

```
val config = ConfigFactory.parseString("""
akka {
  actor {
    serializers {
      java = "akka.serialization.JavaSerializer"
      proto = "akka.remote.serialization.ProtobufSerializer"
      myown = "docs.serialization.MyOwnSerializer"
    }
  }
}
""")
```

After you've bound names to different implementations of `Serializer` you need to wire which classes should be serialized using which `Serializer`, this is done in the “`akka.actor.serialization-bindings`”-section:

```
val config = ConfigFactory.parseString("""
akka {
  actor {
    serializers {
      java = "akka.serialization.JavaSerializer"
      proto = "akka.remote.serialization.ProtobufSerializer"
      myown = "docs.serialization.MyOwnSerializer"
    }

    serialization-bindings {
      "java.lang.String" = java
      "docs.serialization.Customer" = java
      "com.google.protobuf.Message" = proto
      "docs.serialization.MyOwnSerializable" = myown
      "java.lang.Boolean" = myown
    }
  }
}
""")
```

You only need to specify the name of an interface or abstract base class of the messages. In case of ambiguity, i.e. the message implements several of the configured classes, the most specific configured class will be used, i.e. the one of which all other candidates are superclasses. If this condition cannot be met, because e.g. `java.io.Serializable` and `MyOwnSerializable` both apply and neither is a subtype of the other, a warning will be issued.

Akka provides serializers for `java.io.Serializable` and `protobuf com.google.protobuf.GeneratedMessage` by default (the latter only if depending on the `akka-remote` module), so normally you don't need to add configuration for that; since `com.google.protobuf.GeneratedMessage` implements `java.io.Serializable`, `protobuf` messages will always be serialized using the `protobuf` protocol unless specifically overridden. In order to disable a default serializer, map its marker type to “none”:

```
akka.actor.serialization-bindings {
  "java.io.Serializable" = none
}
```

Verification

If you want to verify that your messages are serializable you can enable the following config option:

```
val config = ConfigFactory.parseString("""
akka {
  actor {
    serialize-messages = on
  }
}
```

```

    }
  }
  """)

```

Warning: We only recommend using the config option turned on when you're running tests. It is completely pointless to have it turned on in other scenarios.

If you want to verify that your Props are serializable you can enable the following config option:

```

val config = ConfigFactory.parseString("""
akka {
  actor {
    serialize-creators = on
  }
}
""")

```

Warning: We only recommend using the config option turned on when you're running tests. It is completely pointless to have it turned on in other scenarios.

Programmatic

If you want to programmatically serialize/deserialize using Akka Serialization, here's some examples:

```

import akka.actor.*;
import akka.serialization.*;

```

```

ActorSystem system = ActorSystem.create("example");

// Get the Serialization Extension
Serialization serialization = SerializationExtension.get(system);

// Have something to serialize
String original = "woohoo";

// Find the Serializer for it
Serializer serializer = serialization.findSerializerFor(original);

// Turn it into bytes
byte[] bytes = serializer.toBinary(original);

// Turn it back into an object,
// the nulls are for the class manifest and for the classloader
String back = (String) serializer.fromBinary(bytes);

// Voilà!
assertEquals(original, back);

```

For more information, have a look at the [ScalaDoc](#) for `akka.serialization._`

5.4.2 Customization

So, lets say that you want to create your own Serializer, you saw the `docs.serialization.MyOwnSerializer` in the config example above?

Creating new Serializers

First you need to create a class definition of your `Serializer`, which is done by extending `akka.serialization.JSerializer`, like this:

```
import akka.actor.*;
import akka.serialization.*;

public class MyOwnSerializer extends JSerializer {

    // This is whether "fromBinary" requires a "clazz" or not
    @Override public boolean includeManifest() {
        return false;
    }

    // Pick a unique identifier for your Serializer,
    // you've got a couple of billions to choose from,
    // 0 - 16 is reserved by Akka itself
    @Override public int identifier() {
        return 1234567;
    }

    // "toBinary" serializes the given object to an Array of Bytes
    @Override public byte[] toBinary(Object obj) {
        // Put the code that serializes the object here
        // ... ..
    }

    // "fromBinary" deserializes the given array,
    // using the type hint (if any, see "includeManifest" above)
    @Override public Object fromBinaryJava(byte[] bytes,
                                           Class<?> clazz) {
        // Put your code that deserializes here
        // ... ..
    }
}
```

Then you only need to fill in the blanks, bind it to a name in your *Configuration* and then list which classes that should be serialized using it.

Serializing ActorRefs

All `ActorRefs` are serializable using `JavaSerializer`, but in case you are writing your own serializer, you might want to know how to serialize and deserialize them properly. In the general case, the local address to be used depends on the type of remote address which shall be the recipient of the serialized information. Use `Serialization.serializedActorPath(actorRef)` like this:

```
import akka.actor.*;
import akka.serialization.*;

// Serialize
// (beneath toBinary)
String identifier = Serialization.serializedActorPath(theActorRef);

// Then just serialize the identifier however you like

// Deserialize
// (beneath fromBinary)
final ActorRef deserializedActorRef = extendedSystem.provider().resolveActorRef(
    identifier);
// Then just use the ActorRef
```

This assumes that serialization happens in the context of sending a message through the remote transport. There are other uses of serialization, though, e.g. storing actor references outside of an actor application (database, durable mailbox, etc.). In this case, it is important to keep in mind that the address part of an actor's path determines how that actor is communicated with. Storing a local actor path might be the right choice if the retrieval happens in the same logical context, but it is not enough when deserializing it on a different network host: for that it would need to include the system's remote transport address. An actor system is not limited to having just one remote transport per se, which makes this question a bit more interesting. To find out the appropriate address to use when sending to `remoteAddr` you can use `ActorRefProvider.getExternalAddressFor(remoteAddr)` like this:

```
public class ExternalAddressExt implements Extension {
    private final ExtendedActorSystem system;

    public ExternalAddressExt(ExtendedActorSystem system) {
        this.system = system;
    }

    public Address getAddressFor(Address remoteAddress) {
        final scala.Option<Address> optAddr = system.provider()
            .getExternalAddressFor(remoteAddress);
        if (optAddr.isDefined()) {
            return optAddr.get();
        } else {
            throw new UnsupportedOperationException(
                "cannot send to remote address " + remoteAddress);
        }
    }
}

public class ExternalAddress extends
    AbstractExtensionId<ExternalAddressExt> implements ExtensionIdProvider {
    public static final ExternalAddress ID = new ExternalAddress();

    public ExternalAddress lookup() {
        return ID;
    }

    public ExternalAddressExt createExtension(ExtendedActorSystem system) {
        return new ExternalAddressExt(system);
    }
}

public class ExternalAddressExample {
    public String serializeTo(ActorRef ref, Address remote) {
        return ref.path().toSerializationFormatWithAddress(
            ExternalAddress.ID.get(system).getAddressFor(remote));
    }
}
```

Note: `ActorPath.toSerializationFormatWithAddress` differs from `toString` if the address does not already have host and port components, i.e. it only inserts address information for local addresses.

`toSerializationFormatWithAddress` also adds the unique id of the actor, which will change when the actor is stopped and then created again with the same name. Sending messages to a reference pointing the old actor will not be delivered to the new actor. If you do not want this behavior, e.g. in case of long term storage of the reference, you can use `toStringWithAddress`, which does not include the unique id.

This requires that you know at least which type of address will be supported by the system which will deserialize the resulting actor reference; if you have no concrete address handy you can create a dummy one for the right protocol using `new Address(protocol, "", "", 0)` (assuming that the actual transport used is as lenient as Akka's `RemoteActorRefProvider`).

There is also a default remote address which is the one used by cluster support (and typical systems have just this

one); you can get it like this:

```
public class DefaultAddressExt implements Extension {
    private final ExtendedActorSystem system;

    public DefaultAddressExt(ExtendedActorSystem system) {
        this.system = system;
    }

    public Address getAddress() {
        return system.provider().getDefaultAddress();
    }
}

public class DefaultAddress extends
    AbstractExtensionId<DefaultAddressExt> implements ExtensionIdProvider {
    public static final DefaultAddress ID = new DefaultAddress();

    public DefaultAddress lookup() {
        return ID;
    }

    public DefaultAddressExt createExtension(ExtendedActorSystem system) {
        return new DefaultAddressExt(system);
    }
}
```

Deep serialization of Actors

The current recommended approach to do deep serialization of internal actor state is to use Event Sourcing, for more reading on the topic, see these examples:

[Martin Krasser on EventSourcing Part1](#)

[Martin Krasser on EventSourcing Part2](#)

Note: Built-in API support for persisting Actors will come in a later release, see the roadmap for more info:
[Akka 2.0 roadmap](#)

5.4.3 A Word About Java Serialization

When using Java serialization without employing the `JavaSerializer` for the task, you must make sure to supply a valid `ExtendedActorSystem` in the dynamic variable `JavaSerializer.currentSystem`. This is used when reading in the representation of an `ActorRef` for turning the string representation into a real reference. `DynamicVariable` is a thread-local variable, so be sure to have it set while deserializing anything which might contain actor references.

5.4.4 External Akka Serializers

[Akka-protostuff](#) by Roman Levenstein

[Akka-quickser](#) by Roman Levenstein

[Akka-kryo](#) by Roman Levenstein

5.5 I/O

5.5.1 Introduction

The `akka.io` package has been developed in collaboration between the Akka and [spray.io](#) teams. Its design combines experiences from the `spray-io` module with improvements that were jointly developed for more general consumption as an actor-based service.

Warning: The IO implementation is marked as “**experimental**” as of its introduction in Akka 2.2.0. We will continue to improve this API based on our users’ feedback, which implies that while we try to keep incompatible changes to a minimum the binary compatibility guarantee for maintenance releases does not apply to the contents of the `akka.io` package.

The guiding design goal for this I/O implementation was to reach extreme scalability, make no compromises in providing an API correctly matching the underlying transport mechanism and to be fully event-driven, non-blocking and asynchronous. The API is meant to be a solid foundation for the implementation of network protocols and building higher abstractions; it is not meant to be a full-service high-level NIO wrapper for end users.

5.5.2 Terminology, Concepts

The I/O API is completely actor based, meaning that all operations are implemented with message passing instead of direct method calls. Every I/O driver (TCP, UDP) has a special actor, called a *manager* that serves as an entry point for the API. I/O is broken into several drivers. The manager for a particular driver is accessible by querying an `ActorSystem`. For example the following code looks up the TCP manager and returns its `ActorRef`:

```
final ActorRef tcpManager = Tcp.get(getContext().system()).manager();
```

The manager receives I/O command messages and instantiates worker actors in response. The worker actors present themselves to the API user in the reply to the command that was sent. For example after a `Connect` command sent to the TCP manager the manager creates an actor representing the TCP connection. All operations related to the given TCP connections can be invoked by sending messages to the connection actor which announces itself by sending a `Connected` message.

DeathWatch and Resource Management

I/O worker actors receive commands and also send out events. They usually need a user-side counterpart actor listening for these events (such events could be inbound connections, incoming bytes or acknowledgements for writes). These worker actors *watch* their listener counterparts. If the listener stops then the worker will automatically release any resources that it holds. This design makes the API more robust against resource leaks.

Thanks to the completely actor based approach of the I/O API the opposite direction works as well: a user actor responsible for handling a connection can watch the connection actor to be notified if it unexpectedly terminates.

Write models (Ack, Nack)

I/O devices have a maximum throughput which limits the frequency and size of writes. When an application tries to push more data than a device can handle, the driver has to buffer bytes until the device is able to write them. With buffering it is possible to handle short bursts of intensive writes — but no buffer is infinite. “Flow control” is needed to avoid overwhelming device buffers.

Akka supports two types of flow control:

- *Ack-based*, where the driver notifies the writer when writes have succeeded.
- *Nack-based*, where the driver notifies the writer when writes have failed.

Each of these models is available in both the TCP and the UDP implementations of Akka I/O.

Individual writes can be acknowledged by providing an ack object in the write message (`Write` in the case of TCP and `Send` for UDP). When the write is complete the worker will send the ack object to the writing actor. This can be used to implement *ack-based* flow control; sending new data only when old data has been acknowledged.

If a write (or any other command) fails, the driver notifies the actor that sent the command with a special message (`CommandFailed` in the case of UDP and TCP). This message will also notify the writer of a failed write, serving as a nack for that write. Please note, that in a nack-based flow-control setting the writer has to be prepared for the fact that the failed write might not be the most recent write it sent. For example, the failure notification for a write `W1` might arrive after additional write commands `W2` and `W3` have been sent. If the writer wants to resend any nacked messages it may need to keep a buffer of pending messages.

Warning: An acknowledged write does not mean acknowledged delivery or storage; receiving an ack for a write simply signals that the I/O driver has successfully processed the write. The Ack/Nack protocol described here is a means of flow control not error handling. In other words, data may still be lost, even if every write is acknowledged.

ByteString

To maintain isolation, actors should communicate with immutable objects only. `ByteString` is an immutable container for bytes. It is used by Akka's I/O system as an efficient, immutable alternative the traditional byte containers used for I/O on the JVM, such as `byte[]` and `ByteBuffer`.

`ByteString` is a *rope-like* data structure that is immutable and provides fast concatenation and slicing operations (perfect for I/O). When two `ByteStrings` are concatenated together they are both stored within the resulting `ByteString` instead of copying both to a new array. Operations such as `drop` and `take` return `ByteStrings` that still reference the original array, but just change the offset and length that is visible. Great care has also been taken to make sure that the internal array cannot be modified. Whenever a potentially unsafe array is used to create a new `ByteString` a defensive copy is created. If you require a `ByteString` that only blocks a much memory as necessary for its content, use the `compact` method to get a `CompactByteString` instance. If the `ByteString` represented only a slice of the original array, this will result in copying all bytes in that slice.

`ByteString` inherits all methods from `IndexedSeq`, and it also has some new ones. For more information, look up the `akka.util.ByteString` class and its companion object in the `ScalaDoc`.

`ByteString` also comes with its own optimized builder and iterator classes `ByteStringBuilder` and `ByteIterator` which provide extra features in addition to those of normal builders and iterators.

Compatibility with java.io

A `ByteStringBuilder` can be wrapped in a `java.io.OutputStream` via the `asOutputStream` method. Likewise, `ByteIterator` can be wrapped in a `java.io.InputStream` via `asInputStream`. Using these, `akka.io` applications can integrate legacy code based on `java.io` streams.

5.5.3 Architecture in-depth

For further details on the design and internal architecture see *I/O Layer Design*.

5.6 Encoding and decoding binary data

Warning: The IO implementation is marked as “**experimental**” as of its introduction in Akka 2.2.0. We will continue to improve this API based on our users’ feedback, which implies that while we try to keep incompatible changes to a minimum the binary compatibility guarantee for maintenance releases does not apply to the contents of the *akka.io* package.

Akka adopted and adapted the implementation of data processing pipelines found in the `spray-io` module. The idea is that encoding and decoding often go hand in hand and keeping the code pertaining to one protocol layer together is deemed more important than writing down the complete read side—say—in the iteratee style in one go; pipelines encourage packaging the stages in a form which lends itself better to reuse in a protocol stack. Another reason for choosing this abstraction is that it is at times necessary to change the behavior of encoding and decoding within a stage based on a message stream’s state, and pipeline stages allow communication between the read and write halves quite naturally.

The actual byte-fiddling can be done within pipeline stages, for example using the rich API of `ByteIterator` and `ByteStringBuilder` as shown below. All these activities are synchronous transformations which benefit greatly from CPU affinity to make good use of those data caches. Therefore the design of the pipeline infrastructure is completely synchronous, every stage’s handler code can only directly return the events and/or commands resulting from an input, there are no callbacks. Exceptions thrown within a pipeline stage will abort processing of the whole pipeline under the assumption that recoverable error conditions will be signaled in-band to the next stage instead of raising an exception.

An overall “logical” pipeline can span multiple execution contexts, for example starting with the low-level protocol layers directly within an actor handling the reads and writes to a TCP connection and then being passed to a number of higher-level actors which do the costly application level processing. This is supported by feeding the generated events into a sink which sends them to another actor, and that other actor will then upon reception feed them into its own pipeline.

5.6.1 Introducing the Sample Protocol

In the following the process of implementing a protocol stack using pipelines is demonstrated on the following simple example:

```

frameLen: Int
persons: Int
persons times {
  first: String
  last: String
}
points: Int
points times Double

```

mapping to the following data type:

```

public class Message {

  static public class Person {
    private final String first;
    private final String last;

    public Person(String first, String last) {
      this.first = first;
      this.last = last;
    }

    public String getFirst() {
      return first;
    }
  }
}

```

```

    public String getLast() {
        return last;
    }

}

private final Person[] persons;
private final double[] happinessCurve;

public Message(Person[] persons, double[] happinessCurve) {
    this.persons = persons;
    this.happinessCurve = happinessCurve;
}

public Person[] getPersons() {
    return persons;
}

public double[] getHappinessCurve() {
    return happinessCurve;
}
}

```

We will split the handling of this protocol into two parts: the frame-length encoding handles the buffering necessary on the read side and the actual encoding of the frame contents is done in a separate stage.

5.6.2 Building a Pipeline Stage

As a common example, which is also included in the `akka-actor` package, let us look at a framing protocol which works by prepending a length field to each message (the following is a simplified version for demonstration purposes, the real implementation is more configurable and implemented in Scala).

```

import java.nio.ByteOrder;
import java.util.ArrayList;

import scala.util.Either;
import akka.io.AbstractSymmetricPipePair;
import akka.io.PipePairFactory;
import akka.io.PipelineContext;
import akka.io.SymmetricPipePair;
import akka.io.SymmetricPipelineStage;
import akka.util.ByteString;
import akka.util.ByteStringBuilder;

public class LengthFieldFrame extends
    SymmetricPipelineStage<PipelineContext, ByteString, ByteString> {

    final int maxSize;

    public LengthFieldFrame(int maxSize) {
        this.maxSize = maxSize;
    }

    @Override
    public SymmetricPipePair<ByteString, ByteString> apply(final PipelineContext ctx) {
        return PipePairFactory
            .create(ctx, new AbstractSymmetricPipePair<ByteString, ByteString>() {

                final ByteOrder byteOrder = ByteOrder.BIG_ENDIAN;
                ByteString buffer = null;
            }
        );
    }
}

```

```

@Override
public Iterable<Either<ByteString, ByteString>> onCommand(
    ByteString cmd) {
    final int length = cmd.length() + 4;
    if (length > maxSize) {
        return new ArrayList<Either<ByteString, ByteString>>(0);
    }
    final ByteStringBuilder bb = new ByteStringBuilder();
    bb.putInt(length, byteOrder);
    bb.append(cmd);
    return singleCommand(bb.result());
}

@Override
public Iterable<Either<ByteString, ByteString>> onEvent(
    ByteString event) {
    final ArrayList<Either<ByteString, ByteString>> res =
        new ArrayList<Either<ByteString, ByteString>>();
    ByteString current = buffer == null ? event : buffer.concat(event);
    while (true) {
        if (current.length() == 0) {
            buffer = null;
            return res;
        } else if (current.length() < 4) {
            buffer = current;
            return res;
        } else {
            final int length = current.iterator().getInt(byteOrder);
            if (length > maxSize)
                throw new IllegalArgumentException(
                    "received too large frame of size " + length + " (max = "
                        + maxSize + ")");
            if (current.length() < length) {
                buffer = current;
                return res;
            } else {
                res.add(makeEvent(current.slice(4, length)));
                current = current.drop(length);
            }
        }
    }
}

});
}
}

```

In the end a pipeline stage is nothing more than a set of three methods: one transforming commands arriving from above, one transforming events arriving from below and the third transforming incoming management commands (not shown here, see below for more information). The result of the transformation can in either case be a sequence of commands flowing downwards or events flowing upwards (or a combination thereof).

In the case above the data type for commands and events are equal as both functions operate only on `ByteString`, and the transformation does not change that type because it only adds or removes four octets at the front.

The pair of command and event transformation functions is represented by an object of type `AbstractPipePair`, or in this case a `AbstractSymmetricPipePair`. This object could benefit from knowledge about the context it is running in, for example an `Actor`, and this context is introduced by making a `PipelineStage` be a factory for producing a `PipePair`. The factory method is called `apply` (a Scala tradition) and receives the context object as its argument. The implementation of this factory method could now make use of the context in whatever way it sees fit, you will see an example further down.

5.6.3 Manipulating ByteStrings

The second stage of our sample protocol stack illustrates in more depth what showed only a little in the pipeline stage built above: constructing and deconstructing byte strings. Let us first take a look at the encoder:

```
public class MessageStage extends
    SymmetricPipelineStage<HasByteOrder, Message, ByteString> {

    @Override
    public SymmetricPipePair<Message, ByteString> apply(final HasByteOrder context) {

        return PipePairFactory
            .create(context, new AbstractSymmetricPipePair<Message, ByteString>() {

                final ByteOrder byteOrder = context.byteOrder();

                private void putString(ByteStringBuilder builder, String str) {
                    final byte[] bytes = ByteString.fromString(str, "UTF-8").toArray();
                    builder.putInt(bytes.length, byteOrder);
                    builder.putBytes(bytes);
                }

                @Override
                public Iterable<Either<Message, ByteString>> onCommand(Message cmd) {
                    final ByteStringBuilder builder = new ByteStringBuilder();

                    builder.putInt(cmd.getPersons().length, byteOrder);
                    for (Message.Person p : cmd.getPersons()) {
                        putString(builder, p.getFirst());
                        putString(builder, p.getLast());
                    }

                    builder.putInt(cmd.getHappinessCurve().length, byteOrder);
                    builder.putDoubles(cmd.getHappinessCurve(), byteOrder);

                    return singleCommand(builder.result());
                }

                // decoding omitted ...

            });
    }
}
```

Note how the byte order to be used by this stage is fixed in exactly one place, making it impossible get wrong between commands and events; the way how the byte order is passed into the stage demonstrates one possible use for the stage's context parameter.

The basic tool for constructing a `ByteString` is a `ByteStringBuilder`. This builder is specialized for concatenating byte representations of the primitive data types like `Int` and `Double` or arrays thereof. Encoding a `String` requires a bit more work because not only the sequence of bytes needs to be encoded but also the length, otherwise the decoding stage would not know where the `String` terminates. When all values making up the `Message` have been appended to the builder, we simply pass the resulting `ByteString` on to the next stage as a command using the optimized `singleCommand` facility.

Warning: The `singleCommand` and `singleEvent` methods provide a way to generate responses which transfer exactly one result from one pipeline stage to the next without suffering the overhead of object allocations. This means that the returned collection object will not work for anything else (you will get `ClassCastExceptions`!) and this facility can only be used *EXACTLY ONCE* during the processing of one input (command or event).

Now let us look at the decoder side:

```
private String getString(ByteIterator iter) {
    final int length = iter.getInt(byteOrder);
    final byte[] bytes = new byte[length];
    iter.getBytes(bytes);
    return ByteString.fromArray(bytes).utf8String();
}

@Override
public Iterable<Either<Message, ByteString>> onEvent(ByteString evt) {
    final ByteIterator iter = evt.iterator();

    final int personLength = iter.getInt(byteOrder);
    final Message.Person[] persons = new Message.Person[personLength];
    for (int i = 0; i < personLength; ++i) {
        persons[i] = new Message.Person(getString(iter), getString(iter));
    }

    final int curveLength = iter.getInt(byteOrder);
    final double[] curve = new double[curveLength];
    iter.getDoubles(curve, byteOrder);

    // verify that this was all; could be left out to allow future
    // extensions
    assert iter.isEmpty();

    return singleEvent(new Message(persons, curve));
}
```

The decoding side does the same things that the encoder does in the same order, it just uses a `ByteIterator` to retrieve primitive data types or arrays of those from the underlying `ByteString`. And in the end it hands the assembled `Message` as an event to the next stage using the optimized `singleEvent` facility (see warning above).

5.6.4 Building a Pipeline

Given the two pipeline stages introduced in the sections above we can now put them to some use. First we define some message to be encoded:

```
final Message msg = new Message(
    new Message.Person[] {
        new Message.Person("Alice", "Gibbons"),
        new Message.Person("Bob", "Sparseley")
    },
    new double[] { 1.0, 3.0, 5.0 });
```

Then we need to create a pipeline context which satisfies our declared needs:

```
class Context extends AbstractPipelineContext implements HasByteOrder {

    @Override
    public ByteOrder byteOrder() {
        return java.nio.ByteOrder.BIG_ENDIAN;
    }

}

final Context ctx = new Context();
```

Building the pipeline and encoding this message then is quite simple:

```
final PipelineStage<Context, Message, ByteString, Message, ByteString> stages =
    PipelineStage.sequence(
```

```

        new MessageStage(),
        new LengthFieldFrame(10000)
    );

    final PipelineSink<ByteString, Message> sink =
        new PipelineSink<ByteString, Message>() {

        @Override
        public void onCommand(ByteString cmd) throws Throwable {
            commandHandler.tell(cmd, ActorRef.noSender());
        }

        @Override
        public void onEvent(Message evt) throws Throwable {
            eventHandler.tell(evt, ActorRef.noSender());
        }
    };

    final PipelineInjector<Message, ByteString> injector =
        PipelineFactory.buildWithSink(ctx, stages, sink);

    injector.injectCommand(msg);

```

First we *sequence* the two stages, i.e. attach them such that the output of one becomes the input of the other. Then we create a `PipelineSink` which is essentially a callback interface for what shall happen with the encoded commands or decoded events, respectively. Then we build the pipeline using the `PipelineFactory`, which returns an interface for feeding commands and events into this pipeline instance. As a demonstration of how to use this, we simply encode the message shown above and the resulting `ByteString` will then be sent to the `commandHandler` actor. Decoding works in the same way, only using `injectEvent`.

Injecting into a pipeline using a `PipelineInjector` will catch exceptions resulting from processing the input, in which case the exception (there can only be one per injection) is passed into the respective sink. The default implementation of `onCommandFailure` and `onEventFailure` will re-throw the exception (whence originates the `throws` declaration of the `inject*` method).

5.6.5 Using the Pipeline's Context

Up to this point there was always a parameter `ctx` which was used when constructing a pipeline, but it was not explained in full. The context is a piece of information which is made available to all stages of a pipeline. The context may also carry behavior, provide infrastructure or helper methods etc. It should be noted that the context is bound to the pipeline and as such must not be accessed concurrently from different threads unless care is taken to properly synchronize such access. Since the context will in many cases be provided by an actor it is not recommended to share this context with code executing outside of the actor's message handling.

Warning: A `PipelineContext` instance *MUST NOT* be used by two different pipelines since it contains mutable fields which are used during message processing.

5.6.6 Using Management Commands

Since pipeline stages do not have any reference to the pipeline or even to their neighbors they cannot directly effect the injection of commands or events outside of their normal processing. But sometimes things need to happen driven by a timer, for example. In this case the timer would need to cause sending tick messages to the whole pipeline, and those stages which wanted to receive them would act upon those. In order to keep the type signatures for events and commands useful, such external triggers are sent out-of-band, via a different channel—the management port. One example which makes use of this facility is the `TickGenerator` which comes included with `akka-actor` (this is a transcription of the Scala version which is actually included in the `akka-actor` JAR):

```

public interface HasActorContext extends PipelineContext {

    public ActorContext getContext();

}

public class TickGenerator<Cmd, Evt> extends
    PipelineStage<HasActorContext, Cmd, Cmd, Evt, Evt> {

    public static interface Trigger {};

    public static class Tick implements Trigger {
        final FiniteDuration timestamp;

        public Tick(FiniteDuration timestamp) {
            super();
            this.timestamp = timestamp;
        }

        public FiniteDuration getTimestamp() {
            return timestamp;
        }
    }

    private final FiniteDuration interval;

    public TickGenerator(FiniteDuration interval) {
        this.interval = interval;
    }

    @Override
    public PipePair<Cmd, Cmd, Evt, Evt> apply(final HasActorContext ctx) {
        return PipePairFactory.create(ctx,
            new AbstractPipePair<Cmd, Cmd, Evt, Evt>() {

                private final Trigger trigger = new Trigger() {
                    public String toString() {
                        return "Tick[" + ctx.getContext().self().path() + "];"
                    }
                };

                private void schedule() {
                    final ActorSystem system = ctx.getContext().system();
                    system.scheduler().scheduleOnce(interval,
                        ctx.getContext().self(), trigger, system.dispatcher(), null);
                }

                {
                    schedule();
                }

                @Override
                public Iterable<Either<Evt, Cmd>> onCommand(Cmd cmd) {
                    return singleCommand(cmd);
                }

                @Override
                public Iterable<Either<Evt, Cmd>> onEvent(Evt evt) {
                    return singleEvent(evt);
                }

                @Override
                public Iterable<Either<Evt, Cmd>> onManagementCommand(Object cmd) {

```

```

        if (cmd == trigger) {
            ctx.getContext().self().tell(new Tick(Deadline.now().time()),
                ActorRef.noSender());
            schedule();
        }
        return Collections.emptyList();
    }

    });
}
}

```

This pipeline stage is to be used within an actor, and it will make use of this context in order to schedule the delivery of Tick messages; the actor is then supposed to feed these messages into the management port of the pipeline. An example could look like this:

```

public class Processor extends UntypedActor {

    private class Context extends AbstractPipelineContext
        implements HasByteOrder, HasActorContext {

        @Override
        public ActorContext getContext() {
            return Processor.this.getContext();
        }

        @Override
        public ByteOrder byteOrder() {
            return java.nio.ByteOrder.BIG_ENDIAN;
        }

    }

    final Context ctx = new Context();

    final FiniteDuration interval = Duration.apply(1, TimeUnit.SECONDS);

    final PipelineStage<Context, Message, ByteString, Message, ByteString> stages =
        PipelineStage.sequence(
            // Java 7 can infer these types, Java 6 cannot
            PipelineStage.<Context, Message, Message, ByteString, Message, Message,
            ByteString> sequence( //
                new TickGenerator<Message, Message>(interval), //
                new MessageStage(), //
                new LengthFieldFrame(10000));

    private final ActorRef evts;
    private final ActorRef cmds;

    final PipelineInjector<Message, ByteString> injector = PipelineFactory
        .buildWithSink(ctx, stages, new PipelineSink<ByteString, Message>() {

            @Override
            public void onCommand(ByteString cmd) {
                cmds.tell(cmd, getSelf());
            }

            @Override
            public void onEvent(Message evt) {
                evts.tell(evt, getSelf());
            }

        });
}

```

```

public Processor(ActorRef cmds, ActorRef evts) throws Exception {
    this.cmds = cmds;
    this.evts = evts;
}

// omitted ...

@Override
public void onReceive(Object obj) throws Exception {
    if (obj instanceof Message) {
        injector.injectCommand((Message) obj);
    } else if (obj instanceof ByteString) {
        injector.injectEvent((ByteString) obj);
    } else if (obj instanceof TickGenerator.Trigger) {
        injector.managementCommand(obj);
    }
}
}

```

This actor extends our well-known pipeline with the tick generator and attaches the outputs to functions which send commands and events to actors for further processing. The pipeline stages will then all receive on `Tick` per second which can be used like so:

```

private FiniteDuration lastTick = Duration.Zero();

@Override
public Iterable<Either<Message, ByteString>> onManagementCommand(Object cmd) {
    // omitted ...
    if (cmd instanceof TickGenerator.Tick) {
        final FiniteDuration timestamp = ((TickGenerator.Tick) cmd)
            .getTimestamp();
        System.out.println("time since last tick: "
            + timestamp.minus(lastTick));
        lastTick = timestamp;
    }
    return Collections.emptyList();
}

```

Note: Management commands are delivered to all stages of a pipeline “effectively parallel”, like on a broadcast medium. No code will actually run concurrently since a pipeline is strictly single-threaded, but the order in which these commands are processed is not specified.

The intended purpose of management commands is for each stage to define its special command types and then listen only to those (where the aforementioned `Tick` message is a useful counter-example), exactly like sending packets on a wifi network where every station receives all traffic but reacts only to those messages which are destined for it.

If you need all stages to react upon something in their defined order, then this must be modeled either as a command or event, i.e. it will be part of the “business” type of the pipeline.

5.7 Using TCP

Warning: The IO implementation is marked as “**experimental**” as of its introduction in Akka 2.2.0. We will continue to improve this API based on our users’ feedback, which implies that while we try to keep incompatible changes to a minimum the binary compatibility guarantee for maintenance releases does not apply to the contents of the *akka.io* package.

The code snippets through-out this section assume the following imports:

```
import java.net.InetSocketAddress;
import akka.actor.ActorRef;
import akka.actor.ActorSystem;
import akka.actor.Props;
import akka.actor.UntypedActor;
import akka.io.Tcp;
import akka.io.Tcp.Bound;
import akka.io.Tcp.CommandFailed;
import akka.io.Tcp.Connected;
import akka.io.Tcp.ConnectionClosed;
import akka.io.Tcp.Received;
import akka.io.TcpMessage;
import akka.japi.Procedure;
import akka.util.ByteString;
```

All of the Akka I/O APIs are accessed through manager objects. When using an I/O API, the first step is to acquire a reference to the appropriate manager. The code below shows how to acquire a reference to the `Tcp` manager.

```
final ActorRef tcpManager = Tcp.get(getContext().system()).manager();
```

The manager is an actor that handles the underlying low level I/O resources (selectors, channels) and instantiates workers for specific tasks, such as listening to incoming connections.

5.7.1 Connecting

```
public class Client extends UntypedActor {

    final InetSocketAddress remote;
    final ActorRef listener;

    public Client(InetSocketAddress remote, ActorRef listener) {
        this.remote = remote;
        this.listener = listener;

        final ActorRef tcp = Tcp.get(getContext().system()).manager();
        tcp.tell(TcpMessage.connect(remote), getSelf());
    }

    @Override
    public void onReceive(Object msg) throws Exception {
        if (msg instanceof CommandFailed) {
            listener.tell("failed", getSelf());
            getContext().stop(getSelf());
        } else if (msg instanceof Connected) {
            listener.tell(msg, getSelf());
            getSender().tell(TcpMessage.register(getSelf()), getSelf());
            getContext().become(connected(getSender()));
        }
    }

    private Procedure<Object> connected(final ActorRef connection) {
        return new Procedure<Object>() {
            @Override
            public void apply(Object msg) throws Exception {

                if (msg instanceof ByteString) {
                    connection.tell(TcpMessage.write((ByteString) msg), getSelf());
                } else if (msg instanceof CommandFailed) {
                    // OS kernel socket buffer was full
                }
            }
        };
    }
}
```

```

    } else if (msg instanceof Received) {
        listener.tell(((Received) msg).data(), getSelf());

    } else if (msg.equals("close")) {
        connection.tell(TcpMessage.close(), getSelf());

    } else if (msg instanceof ConnectionClosed) {
        getContext().stop(getSelf());
    }
}
};
}
}
}

```

The first step of connecting to a remote address is sending a `Connect` message to the TCP manager; in addition to the simplest form shown above there is also the possibility to specify a local `InetSocketAddress` to bind to and a list of socket options to apply.

Note: The `SO_NODELAY` (`TCP_NODELAY` on Windows) socket option defaults to true in Akka, independently of the OS default settings. This setting disables Nagle's algorithm, considerably improving latency for most applications. This setting could be overridden by passing `SO.TcpNoDelay(false)` in the list of socket options of the `Connect` message.

The TCP manager will then reply either with a `CommandFailed` or it will spawn an internal actor representing the new connection. This new actor will then send a `Connected` message to the original sender of the `Connect` message.

In order to activate the new connection a `Register` message must be sent to the connection actor, informing that one about who shall receive data from the socket. Before this step is done the connection cannot be used, and there is an internal timeout after which the connection actor will shut itself down if no `Register` message is received.

The connection actor watches the registered handler and closes the connection when that one terminates, thereby cleaning up all internal resources associated with that connection.

The actor in the example above uses `become` to switch from unconnected to connected operation, demonstrating the commands and events which are observed in that state. For a discussion on `CommandFailed` see [Throttling Reads and Writes](#) below. `ConnectionClosed` is a trait, which marks the different connection close events. The last line handles all connection close events in the same way. It is possible to listen for more fine-grained connection close events, see [Closing Connections](#) below.

5.7.2 Accepting connections

```

public class Server extends UntypedActor {

    final ActorRef manager;

    public Server(ActorRef manager) {
        this.manager = manager;
    }

    @Override
    public void preStart() throws Exception {
        final ActorRef tcp = Tcp.get(getContext().system()).manager();
        tcp.tell(TcpMessage.bind(getSelf(),
            new InetSocketAddress("localhost", 0), 100), getSelf());
    }

    @Override
    public void onReceive(Object msg) throws Exception {

```

```

if (msg instanceof Bound) {
    manager.tell(msg, getSelf());
} else if (msg instanceof CommandFailed) {
    getContext().stop(getSelf());
} else if (msg instanceof Connected) {
    final Connected conn = (Connected) msg;
    manager.tell(conn, getSelf());
    final ActorRef handler = getContext().actorOf(
        Props.create(SimplisticHandler.class));
    getSender().tell(TcpMessage.register(handler), getSelf());
}
}
}

```

To create a TCP server and listen for inbound connections, a `Bind` command has to be sent to the TCP manager. This will instruct the TCP manager to listen for TCP connections on a particular `InetSocketAddress`; the port may be specified as 0 in order to bind to a random port.

The actor sending the `Bind` message will receive a `Bound` message signalling that the server is ready to accept incoming connections; this message also contains the `InetSocketAddress` to which the socket was actually bound (i.e. resolved IP address and correct port number).

From this point forward the process of handling connections is the same as for outgoing connections. The example demonstrates that handling the reads from a certain connection can be delegated to another actor by naming it as the handler when sending the `Register` message. Writes can be sent from any actor in the system to the connection actor (i.e. the actor which sent the `Connected` message). The simplistic handler is defined as:

```

public class SimplisticHandler extends UntypedActor {
    @Override
    public void onReceive(Object msg) throws Exception {
        if (msg instanceof Received) {
            final ByteString data = ((Received) msg).data();
            System.out.println(data);
            getSender().tell(TcpMessage.write(data), getSelf());
        } else if (msg instanceof ConnectionClosed) {
            getContext().stop(getSelf());
        }
    }
}

```

For a more complete sample which also takes into account the possibility of failures when sending please see [Throttling Reads and Writes](#) below.

The only difference to outgoing connections is that the internal actor managing the listen port—the sender of the `Bound` message—watches the actor which was named as the recipient for `Connected` messages in the `Bind` message. When that actor terminates the listen port will be closed and all resources associated with it will be released; existing connections will not be terminated at this point.

5.7.3 Closing connections

A connection can be closed by sending one of the commands `Close`, `ConfirmedClose` or `Abort` to the connection actor.

`Close` will close the connection by sending a FIN message, but without waiting for confirmation from the remote endpoint. Pending writes will be flushed. If the close is successful, the listener will be notified with `Closed`.

`ConfirmedClose` will close the sending direction of the connection by sending a FIN message, but data will continue to be received until the remote endpoint closes the connection, too. Pending writes will be flushed. If the close is successful, the listener will be notified with `ConfirmedClosed`.

`Abort` will immediately terminate the connection by sending a RST message to the remote endpoint. Pending writes will be not flushed. If the close is successful, the listener will be notified with `Aborted`.

`PeerClosed` will be sent to the listener if the connection has been closed by the remote endpoint. Per default, the connection will then automatically be closed from this endpoint as well. To support half-closed connections set the `keepOpenOnPeerClosed` member of the `Register` message to `true` in which case the connection stays open until it receives one of the above close commands.

`ErrorClosed` will be sent to the listener whenever an error happened that forced the connection to be closed.

All close notifications are sub-types of `ConnectionClosed` so listeners who do not need fine-grained close events may handle all close events in the same way.

5.7.4 Writing to a connection

Once a connection has been established data can be sent to it from any actor in the form of a `Tcp.WriteCommand`. `Tcp.WriteCommand` is an abstract class with three concrete implementations:

Tcp.Write The simplest `WriteCommand` implementation which wraps a `ByteString` instance and an “ack” event. A `ByteString` (as explained in [this section](#)) models one or more chunks of immutable in-memory data with a maximum (total) size of 2 GB (2^{31} bytes).

Tcp.WriteFile If you want to send “raw” data from a file you can do so efficiently with the `Tcp.WriteFile` command. This allows you do designate a (contiguous) chunk of on-disk bytes for sending across the connection without the need to first load them into the JVM memory. As such `Tcp.WriteFile` can “hold” more than 2GB of data and an “ack” event if required.

Tcp.CompoundWrite Sometimes you might want to group (or interleave) several `Tcp.Write` and/or `Tcp.WriteFile` commands into one atomic write command which gets written to the connection in one go. The `Tcp.CompoundWrite` allows you to do just that and offers three benefits:

1. As explained in the following section the TCP connection actor can only handle one single write command at a time. By combining several writes into one `CompoundWrite` you can have them be sent across the connection with minimum overhead and without the need to spoon feed them to the connection actor via an *ACK-based* message protocol.
2. Because a `WriteCommand` is atomic you can be sure that no other actor can “inject” other writes into your series of writes if you combine them into one single `CompoundWrite`. In scenarios where several actors write to the same connection this can be an important feature which can be somewhat hard to achieve otherwise.
3. The “sub writes” of a `CompoundWrite` are regular `Write` or `WriteFile` commands that themselves can request “ack” events. These ACKs are sent out as soon as the respective “sub write” has been completed. This allows you to attach more than one ACK to a `Write` or `WriteFile` (by combining it with an empty write that itself requests an ACK) or to have the connection actor acknowledge the progress of transmitting the `CompoundWrite` by sending out intermediate ACKs at arbitrary points.

5.7.5 Throttling Reads and Writes

The basic model of the TCP connection actor is that it has no internal buffering (i.e. it can only process one write at a time, meaning it can buffer one write until it has been passed on to the O/S kernel in full). Congestion needs to be handled at the user level, for which there are three modes of operation:

- *ACK-based*: every `Write` command carries an arbitrary object, and if this object is not `Tcp.NoAck` then it will be returned to the sender of the `Write` upon successfully writing all contained data to the socket. If no other write is initiated before having received this acknowledgement then no failures can happen due to buffer overrun.
- *NACK-based*: every write which arrives while a previous write is not yet completed will be replied to with a `CommandFailed` message containing the failed write. Just relying on this mechanism requires the implemented protocol to tolerate skipping writes (e.g. if each write is a valid message on its own and it

is not required that all are delivered). This mode is enabled by setting the `useResumeWriting` flag to `false` within the `Register` message during connection activation.

- *NACK-based with write suspending*: this mode is very similar to the NACK-based one, but once a single write has failed no further writes will succeed until a `ResumeWriting` message is received. This message will be answered with a `WritingResumed` message once the last accepted write has completed. If the actor driving the connection implements buffering and resends the NACK'ed messages after having awaited the `WritingResumed` signal then every message is delivered exactly once to the network socket.

These models (with the exception of the second which is rather specialised) are demonstrated in complete examples below. The full and contiguous source is available [on github](#).

Note: It should be obvious that all these flow control schemes only work between one writer and one connection actor; as soon as multiple actors send write commands to a single connection no consistent result can be achieved.

5.7.6 ACK-Based Back-Pressure

For proper function of the following example it is important to configure the connection to remain half-open when the remote side closed its writing end: this allows the example `EchoHandler` to write all outstanding data back to the client before fully closing the connection. This is enabled using a flag upon connection activation (observe the `Register` message):

```
connection.tell(TcpMessage.register(handler,
    true, // <-- keepOpenOnPeerClosed flag
    true), getSelf());
```

With this preparation let us dive into the handler itself:

```
public class SimpleEchoHandler extends UntypedActor {

    final LoggingAdapter log = Logging
        .getLogger(getContext().system(), getSelf());

    final ActorRef connection;
    final InetSocketAddress remote;

    public static final long maxStored = 100000000;
    public static final long highWatermark = maxStored * 5 / 10;
    public static final long lowWatermark = maxStored * 2 / 10;

    public SimpleEchoHandler(ActorRef connection, InetSocketAddress remote) {
        this.connection = connection;
        this.remote = remote;

        // sign death pact: this actor stops when the connection is closed
        getContext().watch(connection);
    }

    @Override
    public void onReceive(Object msg) throws Exception {
        if (msg instanceof Received) {
            final ByteString data = ((Received) msg).data();
            buffer(data);
            connection.tell(TcpMessage.write(data, ACK), getSelf());
            // now switch behavior to "waiting for acknowledgement"
            getContext().become(buffering, false);
        } else if (msg instanceof ConnectionClosed) {
            getContext().stop(getSelf());
        }
    }
}
```

```

private final Procedure<Object> buffering = new Procedure<Object>() {
    @Override
    public void apply(Object msg) throws Exception {
        if (msg instanceof Received) {
            buffer(((Received) msg).data());

        } else if (msg == ACK) {
            acknowledge();

        } else if (msg instanceof ConnectionClosed) {
            if (((ConnectionClosed) msg).isPeerClosed()) {
                closing = true;
            } else {
                // could also be ErrorClosed, in which case we just give up
                getContext().stop(getSelf());
            }
        }
    }
};

// storage omitted ...
}

```

The principle is simple: when having written a chunk always wait for the Ack to come back before sending the next chunk. While waiting we switch behavior such that new incoming data are buffered. The helper functions used are a bit lengthy but not complicated:

```

protected void buffer(ByteString data) {
    storage.add(data);
    stored += data.size();

    if (stored > maxStored) {
        log.warning("drop connection to [{}] (buffer overrun)", remote);
        getContext().stop(getSelf());
    } else if (stored > highWatermark) {
        log.debug("suspending reading");
        connection.tell(TcpMessage.suspendReading(), getSelf());
        suspended = true;
    }
}

protected void acknowledge() {
    final ByteString acked = storage.remove();
    stored -= acked.size();
    transferred += acked.size();

    if (suspended && stored < lowWatermark) {
        log.debug("resuming reading");
        connection.tell(TcpMessage.resumeReading(), getSelf());
        suspended = false;
    }

    if (storage.isEmpty()) {
        if (closing) {
            getContext().stop(getSelf());
        } else {
            getContext().unbecome();
        }
    } else {
        connection.tell(TcpMessage.write(storage.peek(), ACK), getSelf());
    }
}

```

```
}

```

The most interesting part is probably the last: an `Ack` removes the oldest data chunk from the buffer, and if that was the last chunk then we either close the connection (if the peer closed its half already) or return to the idle behavior; otherwise we just send the next buffered chunk and stay waiting for the next `Ack`.

Back-pressure can be propagated also across the reading side back to the writer on the other end of the connection by sending the `SuspendReading` command to the connection actor. This will lead to no data being read from the socket anymore (although this does happen after a delay because it takes some time until the connection actor processes this command, hence appropriate head-room in the buffer should be present), which in turn will lead to the O/S kernel buffer filling up on our end, then the TCP window mechanism will stop the remote side from writing, filling up its write buffer, until finally the writer on the other side cannot push any data into the socket anymore. This is how end-to-end back-pressure is realized across a TCP connection.

5.7.7 NACK-Based Back-Pressure with Write Suspending

```
public class EchoHandler extends UntypedActor {

    final LoggingAdapter log = Logging
        .getLogger(getContext().system(), getSelf());

    final ActorRef connection;
    final InetSocketAddress remote;

    public static final long MAX_STORED = 100000000;
    public static final long HIGH_WATERMARK = MAX_STORED * 5 / 10;
    public static final long LOW_WATERMARK = MAX_STORED * 2 / 10;

    private static class Ack implements Event {
        public final int ack;
        public Ack(int ack) {
            this.ack = ack;
        }
    }

    public EchoHandler(ActorRef connection, InetSocketAddress remote) {
        this.connection = connection;
        this.remote = remote;

        // sign death pact: this actor stops when the connection is closed
        getContext().watch(connection);

        // start out in optimistic write-through mode
        getContext().become(writing);
    }

    private final Procedure<Object> writing = new Procedure<Object>() {
        @Override
        public void apply(Object msg) throws Exception {
            if (msg instanceof Received) {
                final ByteString data = ((Received) msg).data();
                connection.tell(TcpMessage.write(data, new Ack(currentOffset())), getSelf());
                buffer(data);
            } else if (msg instanceof Integer) {
                acknowledge((Integer) msg);
            } else if (msg instanceof CommandFailed) {
                final Write w = (Write) ((CommandFailed) msg).cmd();
                connection.tell(TcpMessage.resumeWriting(), getSelf());
                getContext().become(buffering((Ack) w.ack()));
            }
        }
    };
}
```

```

    } else if (msg instanceof ConnectionClosed) {
      final ConnectionClosed cl = (ConnectionClosed) msg;
      if (cl.isPeerClosed()) {
        if (storage.isEmpty()) {
          getContext().stop(getSelf());
        } else {
          getContext().become(closing);
        }
      }
    }
  }
};

// buffering ...

// closing ...

// storage omitted ...
}

```

The principle here is to keep writing until a `CommandFailed` is received, using acknowledgements only to prune the resend buffer. When a such a failure was received, transition into a different state for handling and handle resending of all queued data:

```

protected Procedure<Object> buffering(final Ack nack) {
  return new Procedure<Object>() {

    private int toAck = 10;
    private boolean peerClosed = false;

    @Override
    public void apply(Object msg) throws Exception {
      if (msg instanceof Received) {
        buffer(((Received) msg).data());
      } else if (msg instanceof WritingResumed) {
        writeFirst();
      } else if (msg instanceof ConnectionClosed) {
        if (((ConnectionClosed) msg).isPeerClosed())
          peerClosed = true;
        else
          getContext().stop(getSelf());
      } else if (msg instanceof Integer) {
        final int ack = (Integer) msg;
        acknowledge(ack);

        if (ack >= nack.ack) {
          // otherwise it was the ack of the last successful write

          if (storage.isEmpty()) {
            if (peerClosed)
              getContext().stop(getSelf());
            else
              getContext().become(writing);
          } else {
            if (toAck > 0) {
              // stay in ACK-based mode for a short while
              writeFirst();
              --toAck;
            }
          }
        }
      }
    }
  }
}

```



```

} else if (stored > HIGH_WATERMARK) {
    log.debug("suspending reading at {}", currentOffset());
    connection.tell(TcpMessage.suspendReading(), getSelf());
    suspended = true;
}
}

protected void acknowledge(int ack) {
    assert ack == storageOffset;
    assert !storage.isEmpty();

    final ByteString acked = storage.remove();
    stored -= acked.size();
    transferred += acked.size();
    storageOffset += 1;

    if (suspended && stored < LOW_WATERMARK) {
        log.debug("resuming reading");
        connection.tell(TcpMessage.resumeReading(), getSelf());
        suspended = false;
    }
}
}

```

5.7.8 Usage Example: TcpPipelineHandler and SSL

This example shows the different parts described above working together. Let us first look at the SSL server:

```

public class SslServer extends UntypedActor {
    final SSLContext sslContext;
    final ActorRef listener;

    final LoggingAdapter log = Logging
        .getLogger(getContext().system(), getSelf());

    public SslServer(SSLContext sslContext, ActorRef listener) {
        this.sslContext = sslContext;
        this.listener = listener;

        // bind to a socket, registering ourselves as incoming connection handler
        Tcp.get(getContext().system()).getManager().tell(
            TcpMessage.bind(getSelf(), new InetSocketAddress("localhost", 0), 100),
            getSelf());
    }

    // this will hold the pipeline handler's context
    Init<WithinActorContext, String, String> init = null;

    @Override
    public void onReceive(Object msg) {
        if (msg instanceof CommandFailed) {
            getContext().stop(getSelf());
        } else if (msg instanceof Bound) {
            listener.tell(msg, getSelf());
        } else if (msg instanceof Connected) {
            // create a javax.net.ssl.SSLEngine for our peer in server mode
            final InetSocketAddress remote = ((Connected) msg).remoteAddress();
            final SSLEngine engine = sslContext.createSSLEngine(
                remote.getHostName(), remote.getPort());
            engine.setUseClientMode(false);

```

```

// build pipeline and set up context for communicating with TcpPipelineHandler
init = TcpPipelineHandler.withLogger(log, sequence(sequence(sequence(sequence(
  new StringByteStringAdapter("utf-8"),
  new DelimiterFraming(1024, ByteString.fromString("\n"), true)),
  new TcpReadWriteAdapter()),
  new SslTlsSupport(engine)),
  new BackpressureBuffer(1000, 10000, 1000000)));

// create handler for pipeline, setting ourselves as payload recipient
final ActorRef handler = getContext().actorOf(
  TcpPipelineHandler.props(init, getSender(), getSelf()));

// register the SSL handler with the connection
getSender().tell(TcpMessage.register(handler), getSelf());

} else if (msg instanceof Init.Event) {
  // unwrap TcpPipelineHandler's event to get a Tcp.Event
  final String recv = init.event(msg);
  // inform someone of the received message
  listener.tell(recv, getSelf());
  // and reply (sender is the SSL handler created above)
  getSender().tell(init.command("world\n"), getSelf());
}
}
}

```

Please refer to [the source code](#) to see all imports.

The actor above binds to a local port and registers itself as the handler for new connections. When a new connection comes in it will create a `javax.net.ssl.SSLEngine` (details not shown here since they vary widely for different setups, please refer to the [JDK documentation](#)) and wrap that in an `SslTlsSupport` pipeline stage (which is included in `akka-actor`).

This sample demonstrates a few more things: below the SSL pipeline stage we have inserted a backpressure buffer which will generate a `HighWatermarkReached` event to tell the upper stages to suspend writing (generated at 10000 buffered bytes) and a `LowWatermarkReached` when they can resume writing (when buffer empties below 1000 bytes); the buffer has a maximum capacity of 1MB. The implementation is very similar to the NACK-based backpressure approach presented above, please refer to the [API documentation](#) for details about its usage. Above the SSL stage comes an adapter which extracts only the payload data from the TCP commands and events, i.e. it speaks `ByteString` above. The resulting byte streams are broken into frames by a `DelimiterFraming` stage which chops them up on newline characters. The top-most stage then converts between `String` and UTF-8 encoded `ByteString`.

As a result the pipeline will accept simple `String` commands, encode them using UTF-8, delimit them with newlines (which are expected to be already present in the sending direction), transform them into TCP commands and events, encrypt them and send them off to the connection actor while buffering writes.

This pipeline is driven by a `TcpPipelineHandler` actor which is also included in `akka-actor`. In order to capture the generic command and event types consumed and emitted by that actor we need to create a wrapper—the nested `Init` class—which also provides the the pipeline context needed by the supplied pipeline; in this case we use the `withLogger` convenience method which supplies a context that implements `HasLogger` and `HasActorContext` and should be sufficient for typical pipelines. With those things bundled up all that remains is creating a `TcpPipelineHandler` and registering that one as the recipient of inbound traffic from the TCP connection.

Since we instructed that handler actor to send any events which are emitted by the SSL pipeline to ourselves, we can then just wait for the reception of the decrypted payload messages, compute a response—just `"world\n"` in this case—and reply by sending back an `Init.Command`. It should be noted that communication with the handler wraps commands and events in the inner types of the `init` object in order to keep things well separated. To ease handling of such path-dependent types there exist two helper methods, namely `Init.command` for creating a command and `Init.event` for unwrapping an event.

Looking at the client side we see that not much needs to be changed:

```
public class SslClient extends UntypedActor {
    final InetSocketAddress remote;
    final SSLContext sslContext;
    final ActorRef listener;

    final LoggingAdapter log = Logging
        .getLogger(getContext().system(), getSelf());

    public SslClient(InetSocketAddress remote, SSLContext sslContext,
        ActorRef listener) {
        this.remote = remote;
        this.sslContext = sslContext;
        this.listener = listener;

        // open a connection to the remote TCP port
        Tcp.get(getContext().system()).getManager()
            .tell(TcpMessage.connect(remote), getSelf());
    }

    // this will hold the pipeline handler's context
    Init<WithinActorContext, String, String> init = null;

    @Override
    public void onReceive(Object msg) {
        if (msg instanceof CommandFailed) {
            getContext().stop(getSelf());
        } else if (msg instanceof Connected) {
            // create a javax.net.ssl.SSLEngine for our peer in client mode
            final SSLEngine engine = sslContext.createSSLEngine(
                remote.getHostName(), remote.getPort());
            engine.setUseClientMode(true);

            // build pipeline and set up context for communicating with TcpPipelineHandler
            init = TcpPipelineHandler.withLogger(log, sequence(sequence(sequence(sequence(
                new StringByteStringAdapter("utf-8"),
                new DelimiterFraming(1024, ByteString.fromString("\n"), true)),
                new TcpReadWriteAdapter(),
                new SslTlsSupport(engine)),
                new BackpressureBuffer(1000, 10000, 1000000)));

            // create handler for pipeline, setting ourselves as payload recipient
            final ActorRef handler = getContext().actorOf(
                TcpPipelineHandler.props(init, getSender(), getSelf()));

            // register the SSL handler with the connection
            getSender().tell(TcpMessage.register(handler), getSelf());

            // and send a message across the SSL channel
            handler.tell(init.command("hello\n"), getSelf());
        } else if (msg instanceof Init.Event) {
            // unwrap TcpPipelineHandler's event into a Tcp.Event
            final String recv = init.event(msg);
            // and inform someone of the received payload
            listener.tell(recv, getSelf());
        }
    }
}
```

Once the connection is established we again create a `TcpPipelineHandler` wrapping an `SslTlsSupport` (in client mode) and register that as the recipient of inbound traffic and ourselves as recipient for the decrypted

payload data. Then we send a greeting to the server and forward any replies to some `listener` actor.

Warning: The `SslTlsSupport` currently does not support using a `Tcp.WriteCommand` other than `Tcp.Write`, like for example `Tcp.WriteFile`. It also doesn't support messages that are larger than the size of the send buffer on the socket. Trying to send such a message will result in a `CommandFailed`. If you need to send large messages over SSL, then they have to be sent in chunks.

5.8 Using UDP

Warning: The IO implementation is marked as “**experimental**” as of its introduction in Akka 2.2.0. We will continue to improve this API based on our users' feedback, which implies that while we try to keep incompatible changes to a minimum the binary compatibility guarantee for maintenance releases does not apply to the contents of the *akka.io* package.

UDP is a connectionless datagram protocol which offers two different ways of communication on the JDK level:

- sockets which are free to send datagrams to any destination and receive datagrams from any origin
- sockets which are restricted to communication with one specific remote socket address

In the low-level API the distinction is made—confusingly—by whether or not `connect` has been called on the socket (even when `connect` has been called the protocol is still connectionless). These two forms of UDP usage are offered using distinct IO extensions described below.

5.8.1 Unconnected UDP

Simple Send

```
public static class SimpleSender extends UntypedActor {
    final InetSocketAddress remote;

    public SimpleSender(InetSocketAddress remote) {
        this.remote = remote;

        // request creation of a SimpleSender
        final ActorRef mgr = Udp.get(getContext().system()).getManager();
        mgr.tell(UdpMessage.simpleSender(), getSelf());
    }

    @Override
    public void onReceive(Object msg) {
        if (msg instanceof Udp.SimpleSenderReady) {
            getContext().become(ready(getSender()));
        } else unhandled(msg);
    }

    private Procedure<Object> ready(final ActorRef send) {
        return new Procedure<Object>() {
            @Override
            public void apply(Object msg) throws Exception {
                if (msg instanceof String) {
                    final String str = (String) msg;
                    send.tell(UdpMessage.send(ByteString.fromString(str), remote), getSelf());
                } else unhandled(msg);
            }
        };
    }
};
```

```
}
}
```

The simplest form of UDP usage is to just send datagrams without the need of getting a reply. To this end a “simple sender” facility is provided as demonstrated above. The UDP extension is queried using the `simpleSender` message, which is answered by a `SimpleSenderReady` notification. The sender of this message is the newly created sender actor which from this point onward can be used to send datagrams to arbitrary destinations; in this example it will just send any UTF-8 encoded `String` it receives to a predefined remote address.

Note: The simple sender will not shut itself down because it cannot know when you are done with it. You will need to send it a `PoisonPill` when you want to close the ephemeral port the sender is bound to.

Bind (and Send)

```
public static class Listener extends UntypedActor {
    final ActorRef nextActor;

    public Listener(ActorRef nextActor) {
        this.nextActor = nextActor;

        // request creation of a bound listen socket
        final ActorRef mgr = Udp.get(getContext().system()).getManager();
        mgr.tell(
            UdpMessage.bind(getSelf(), new InetSocketAddress("localhost", 0)),
            getSelf());
    }

    @Override
    public void onReceive(Object msg) {
        if (msg instanceof Udp.Bound) {
            final Udp.Bound b = (Udp.Bound) msg;
            getContext().become(ready(getSender()));
        } else unhandled(msg);
    }

    private Procedure<Object> ready(final ActorRef socket) {
        return new Procedure<Object>() {
            @Override
            public void apply(Object msg) throws Exception {
                if (msg instanceof Udp.Received) {
                    final Udp.Received r = (Udp.Received) msg;
                    // echo server example: send back the data
                    socket.tell(UdpMessage.send(r.data(), r.sender()), getSelf());
                    // or do some processing and forward it on
                    final Object processed = // parse data etc., e.g. using PipelineStage
                    nextActor.tell(processed, getSelf());

                } else if (msg.equals(UdpMessage.unbind())) {
                    socket.tell(msg, getSelf());

                } else if (msg instanceof Udp.Unbound) {
                    getContext().stop(getSelf());

                } else unhandled(msg);
            }
        };
    }
}
```

If you want to implement a UDP server which listens on a socket for incoming datagrams then you need to use the `bind` command as shown above. The local address specified may have a zero port in which case the operating

system will automatically choose a free port and assign it to the new socket. Which port was actually bound can be found out by inspecting the `Bound` message.

The sender of the `Bound` message is the actor which manages the new socket. Sending datagrams is achieved by using the `send` message type and the socket can be closed by sending a `unbind` command, in which case the socket actor will reply with a `Unbound` notification.

Received datagrams are sent to the actor designated in the `bind` message, whereas the `Bound` message will be sent to the sender of the `bind`.

5.8.2 Connected UDP

The service provided by the connection based UDP API is similar to the `bind-and-send` service we saw earlier, but the main difference is that a connection is only able to send to the `remoteAddress` it was connected to, and will receive datagrams only from that address.

```
public static class Connected extends UntypedActor {
    final InetSocketAddress remote;

    public Connected(InetSocketAddress remote) {
        this.remote = remote;

        // create a restricted a.k.a. "connected" socket
        final ActorRef mgr = UdpConnected.get(getContext().system()).getManager();
        mgr.tell(UdpConnectedMessage.connect(getSelf(), remote), getSelf());
    }

    @Override
    public void onReceive(Object msg) {
        if (msg instanceof UdpConnected.Connected) {
            getContext().become(ready(getSender()));
        } else unhandled(msg);
    }

    private Procedure<Object> ready(final ActorRef connection) {
        return new Procedure<Object>() {
            @Override
            public void apply(Object msg) throws Exception {
                if (msg instanceof UdpConnected.Received) {
                    final UdpConnected.Received r = (UdpConnected.Received) msg;
                    // process data, send it on, etc.
                    // #connected
                    if (r.data().utf8String().equals("hello")) {
                        connection.tell(
                            UdpConnectedMessage.send(ByteString.fromString("world"),
                                getSelf());
                        )
                    }
                    // #connected
                } else if (msg instanceof String) {
                    final String str = (String) msg;
                    connection
                        .tell(UdpConnectedMessage.send(ByteString.fromString(str)),
                            getSelf());
                } else if (msg.equals(UdpConnectedMessage.disconnect())) {
                    connection.tell(msg, getSelf());
                } else if (msg instanceof UdpConnected.Disconnected) {
                    getContext().stop(getSelf());
                } else unhandled(msg);
            }
        };
    }
}
```

```

    }
  };
}
}

```

Consequently the example shown here looks quite similar to the previous one, the biggest difference is the absence of remote address information in `send` and `Received` messages.

Note: There is a small performance benefit in using connection based UDP API over the connectionless one. If there is a `SecurityManager` enabled on the system, every connectionless message send has to go through a security check, while in the case of connection-based UDP the security check is cached after connect, thus writes do not suffer an additional performance penalty.

5.9 ZeroMQ

Akka provides a ZeroMQ module which abstracts a ZeroMQ connection and therefore allows interaction between Akka actors to take place over ZeroMQ connections. The messages can be of a proprietary format or they can be defined using Protobuf. The socket actor is fault-tolerant by default and when you use the `newSocket` method to create new sockets it will properly reinitialize the socket.

ZeroMQ is very opinionated when it comes to multi-threading so configuration option `akka.zeromq.socket-dispatcher` always needs to be configured to a `PinnedDispatcher`, because the actual ZeroMQ socket can only be accessed by the thread that created it.

The ZeroMQ module for Akka is written against an API introduced in JZMQ, which uses JNI to interact with the native ZeroMQ library. Instead of using JZMQ, the module uses ZeroMQ binding for Scala that uses the native ZeroMQ library through JNA. In other words, the only native library that this module requires is the native ZeroMQ library. The benefit of the scala library is that you don't need to compile and manage native dependencies at the cost of some runtime performance. The scala-bindings are compatible with the JNI bindings so they are a drop-in replacement, in case you really need to get that extra bit of performance out.

Note: The currently used version of `zeromq-scala-bindings` is only compatible with `zeromq 2`; `zeromq 3` is not supported.

5.9.1 Connection

ZeroMQ supports multiple connectivity patterns, each aimed to meet a different set of requirements. Currently, this module supports publisher-subscriber connections and connections based on dealers and routers. For connecting or accepting connections, a socket must be created. Sockets are always created using the `akka.zeromq.ZeroMQExtension`, for example:

```
import akka.zeromq.Bind;
import akka.zeromq.ZeroMQExtension;
```

```
ActorRef pubSocket = ZeroMQExtension.get(system).newPubSocket(
    new Bind("tcp://127.0.0.1:1233"));
```

Above examples will create a ZeroMQ Publisher socket that is Bound to the port 21231 on localhost.

Similarly you can create a subscription socket, with a listener, that subscribes to all messages from the publisher using:

```
import akka.zeromq.Connect;
import akka.zeromq.Listener;
import akka.zeromq.Subscribe;
```

```
ActorRef listener = system.actorOf(Props.create(ListenerActor.class));
ActorRef subSocket = ZeroMQExtension.get(system).newSubSocket(
    new Connect("tcp://127.0.0.1:1233"),
    new Listener(listener), Subscribe.all());
```

```
public class ListenerActor extends UntypedActor {
    public void onReceive(Object message) throws Exception {
        //...
    }
}
```

The following sub-sections describe the supported connection patterns and how they can be used in an Akka environment. However, for a comprehensive discussion of connection patterns, please refer to [ZeroMQ – The Guide](#).

Publisher-Subscriber Connection

In a publisher-subscriber (pub-sub) connection, the publisher accepts one or more subscribers. Each subscriber shall subscribe to one or more topics, whereas the publisher publishes messages to a set of topics. Also, a subscriber can subscribe to all available topics. In an Akka environment, pub-sub connections shall be used when an actor sends messages to one or more actors that do not interact with the actor that sent the message.

When you're using zeromq pub/sub you should be aware that it needs multicast - check your cloud - to work properly and that the filtering of events for topics happens client side, so all events are always broadcasted to every subscriber.

An actor is subscribed to a topic as follows:

```
ActorRef subTopicSocket = ZeroMQExtension.get(system).newSubSocket(
    new Connect("tcp://127.0.0.1:1233"),
    new Listener(listener), new Subscribe("foo.bar"));
```

It is a prefix match so it is subscribed to all topics starting with `foo.bar`. Note that if the given string is empty or `Subscribe.all()` is used, the actor is subscribed to all topics.

To unsubscribe from a topic you do the following:

```
import akka.zeromq.Unsubscribe;

subTopicSocket.tell(new Unsubscribe("foo.bar"), ActorRef.noSender());
```

To publish messages to a topic you must use two Frames with the topic in the first frame.

```
import akka.util.ByteString;
import akka.zeromq.ZMQMessage;

pubSocket.tell(ZMQMessage.withFrames(ByteString.fromString("foo.bar"),
    ByteString.fromArray(payload)), ActorRef.noSender());
```

Pub-Sub in Action

The following example illustrates one publisher with two subscribers.

The publisher monitors current heap usage and system load and periodically publishes Heap events on the "health.heap" topic and Load events on the "health.load" topic.

```
import akka.actor.ActorRef;
import akka.actor.UntypedActor;
import akka.actor.Props;
import akka.event.Logging;
import akka.event.LoggingAdapter;
import org.junit.*;
```

```

import scala.concurrent.duration.Duration;
import akka.serialization.SerializationExtension;
import akka.serialization.Serialization;
import java.io.Serializable;
import java.lang.management.ManagementFactory;

public final Object TICK = "TICK";

public class Heap implements Serializable {
    private static final long serialVersionUID = 1L;
    public final long timestamp;
    public final long used;
    public final long max;

    public Heap(long timestamp, long used, long max) {
        this.timestamp = timestamp;
        this.used = used;
        this.max = max;
    }
}

public class Load implements Serializable {
    private static final long serialVersionUID = 1L;
    public final long timestamp;
    public final double loadAverage;

    public Load(long timestamp, double loadAverage) {
        this.timestamp = timestamp;
        this.loadAverage = loadAverage;
    }
}

public class HealthProbe extends UntypedActor {

    ActorRef pubSocket = ZeroMQExtension.get(getContext().system()).newPubSocket(
        new Bind("tcp://127.0.0.1:1237"));
    MemoryMXBean memory = ManagementFactory.getMemoryMXBean();
    OperatingSystemMXBean os = ManagementFactory.getOperatingSystemMXBean();
    Serialization ser = SerializationExtension.get(getContext().system());

    @Override
    public void preStart() {
        getContext().system().scheduler()
            .schedule(Duration.create(1, "second"), Duration.create(1, "second"),
                getSelf(), TICK, getContext().dispatcher(), ActorRef.noSender());
    }

    @Override
    public void postRestart(Throwable reason) {
        // don't call preStart, only schedule once
    }

    @Override
    public void onReceive(Object message) {
        if (message.equals(TICK)) {
            MemoryUsage currentHeap = memory.getHeapMemoryUsage();
            long timestamp = System.currentTimeMillis();

            // use akka SerializationExtension to convert to bytes
            ByteString heapTopic = ByteString.fromString("health.heap", "UTF-8");
            ByteString heapPayload = ByteString.fromArray(
                ser.serialize(
                    new Heap(timestamp,

```

```

        currentHeap.getUsed(),
        currentHeap.getMax()
    ).get());
    // the first frame is the topic, second is the message
    pubSocket.tell(ZMQMessage.withFrames(heapTopic, heapPayload), getSelf());

    // use akka SerializationExtension to convert to bytes
    ByteString loadTopic = ByteString.fromString("health.load", "UTF-8");
    ByteString loadPayload = ByteString.fromArray(
        ser.serialize(new Load(timestamp, os.getSystemLoadAverage())).get()
    );
    // the first frame is the topic, second is the message
    pubSocket.tell(ZMQMessage.withFrames(loadTopic, loadPayload), getSelf());
} else {
    unhandled(message);
}
}
}
}

```

```
system.actorOf(Props.create(HealthProbe.class), "health");
```

Let's add one subscriber that logs the information. It subscribes to all topics starting with "health", i.e. both Heap and Load events.

```

public class Logger extends UntypedActor {

    ActorRef subSocket = ZeroMQExtension.get(getContext().system()).newSubSocket(
        new Connect("tcp://127.0.0.1:1237"),
        new Listener(getSelf(), new Subscribe("health")));
    Serialization ser = SerializationExtension.get(getContext().system());
    SimpleDateFormat timestampFormat = new SimpleDateFormat("HH:mm:ss.SSS");
    LoggingAdapter log = Logging.getLogger(getContext().system(), this);

    @Override
    public void onReceive(Object message) {
        if (message instanceof ZMQMessage) {
            ZMQMessage m = (ZMQMessage) message;
            String topic = m.frame(0).utf8String();
            // the first frame is the topic, second is the message
            if ("health.heap".equals(topic)) {
                Heap heap = ser.deserialize(m.frame(1).toArray(), Heap.class).get();
                log.info("Used heap {} bytes, at {}", heap.used,
                    timestampFormat.format(new Date(heap.timestamp)));
            } else if ("health.load".equals(topic)) {
                Load load = ser.deserialize(m.frame(1).toArray(), Load.class).get();
                log.info("Load average {}, at {}", load.loadAverage,
                    timestampFormat.format(new Date(load.timestamp)));
            }
        } else {
            unhandled(message);
        }
    }
}
}

```

```
system.actorOf(Props.create(Logger.class), "logger");
```

Another subscriber keep track of used heap and warns if too much heap is used. It only subscribes to Heap events.

```

public class HeapAlerter extends UntypedActor {

    ActorRef subSocket = ZeroMQExtension.get(getContext().system()).newSubSocket (

```

```

    new Connect("tcp://127.0.0.1:1237"),
    new Listener(getSelf()), new Subscribe("health.heap"));
Serialization ser = SerializationExtension.get(getContext().system());
LoggingAdapter log = Logging.getLogger(getContext().system(), this);
int count = 0;

@Override
public void onReceive(Object message) {
    if (message instanceof ZMQMessage) {
        ZMQMessage m = (ZMQMessage) message;
        String topic = m.frame(0).utf8String();
        // the first frame is the topic, second is the message
        if ("health.heap".equals(topic)) {
            Heap heap = ser.<Heap>deserialize(m.frame(1).toArray(), Heap.class).get();
            if (((double) heap.used / heap.max) > 0.9) {
                count += 1;
            } else {
                count = 0;
            }
            if (count > 10) {
                log.warning("Need more memory, using {} %",
                    (100.0 * heap.used / heap.max));
            }
        }
    } else {
        unhandled(message);
    }
}
}

system.actorOf(Props.create(HeapAlerter.class), "alerter");

```

Router-Dealer Connection

While Pub/Sub is nice the real advantage of zeromq is that it is a “lego-box” for reliable messaging. And because there are so many integrations the multi-language support is fantastic. When you’re using ZeroMQ to integrate many systems you’ll probably need to build your own ZeroMQ devices. This is where the router and dealer socket types come in handy. With those socket types you can build your own reliable pub sub broker that uses TCP/IP and does publisher side filtering of events.

To create a Router socket that has a high watermark configured, you would do:

```

ActorRef highWatermarkSocket = ZeroMQExtension.get(system).newRouterSocket(
    new SocketOption[] { new Listener(listener),
        new Bind("tcp://127.0.0.1:1233"), new HighWatermark(50000) });

```

The akka-zeromq module accepts most if not all the available configuration options for a zeromq socket.

Push-Pull Connection

Akka ZeroMQ module supports Push-Pull connections.

You can create a Push connection through the:

```

ActorRef newPushSocket(SocketOption[] socketParameters);

```

You can create a Pull connection through the:

```

ActorRef newPullSocket(SocketOption[] socketParameters);

```

More documentation and examples will follow soon.

Rep-Req Connection

Akka ZeroMQ module supports Rep-Req connections.

You can create a Rep connection through the:

```
ActorRef newRepSocket(SocketOption[] socketParameters);
```

You can create a Req connection through the:

```
ActorRef newReqSocket(SocketOption[] socketParameters);
```

More documentation and examples will follow soon.

5.10 Camel

5.10.1 Introduction

The akka-camel module allows Untyped Actors to receive and send messages over a great variety of protocols and APIs. In addition to the native Scala and Java actor API, actors can now exchange messages with other systems over large number of protocols and APIs such as HTTP, SOAP, TCP, FTP, SMTP or JMS, to mention a few. At the moment, approximately 80 protocols and APIs are supported.

Apache Camel

The akka-camel module is based on [Apache Camel](#), a powerful and light-weight integration framework for the JVM. For an introduction to Apache Camel you may want to read this [Apache Camel article](#). Camel comes with a large number of [components](#) that provide bindings to different protocols and APIs. The `camel-extra` project provides further components.

Consumer

Here's an example of using Camel's integration components in Akka.

```
import akka.camel.CamelMessage;
import akka.camel.javaapi.UntypedConsumerActor;

public class MyEndpoint extends UntypedConsumerActor{
    private String uri;

    public String getEndpointUri() {
        return uri;
    }

    public void onReceive(Object message) throws Exception {
        if (message instanceof CamelMessage) {
            /* ... */
        } else
            unhandled(message);
    }

    // Extra constructor to change the default uri,
    // for instance to "jetty:http://localhost:8877/example"
    public MyEndpoint(String uri) {
        this.uri = uri;
    }

    public MyEndpoint() {
        this.uri = "mina2:tcp://localhost:6200?textline=true";
    }
}
```

```
}
}
```

The above example exposes an actor over a TCP endpoint via Apache Camel's [Mina component](#). The actor implements the `getEndpointUri` method to define an endpoint from which it can receive messages. After starting the actor, TCP clients can immediately send messages to and receive responses from that actor. If the message exchange should go over HTTP (via Camel's [Jetty component](#)), the actor's `getEndpointUri` method should return a different URI, for instance "jetty:http://localhost:8877/example". In the above case an extra constructor is added that can set the endpoint URI, which would result in the `getEndpointUri` returning the URI that was set using this constructor.

Producer

Actors can also trigger message exchanges with external systems i.e. produce to Camel endpoints.

```
import akka.camel.javaapi.UntypedProducerActor;

public class Orders extends UntypedProducerActor {
    public String getEndpointUri() {
        return "jms:queue:Orders";
    }
}
```

In the above example, any message sent to this actor will be sent to the JMS queue `Orders`. Producer actors may choose from the same set of Camel components as Consumer actors do. Below an example of how to send a message to the `Orders` producer.

```
ActorSystem system = ActorSystem.create("some-system");
Props props = Props.create(Orders.class);
ActorRef producer = system.actorOf(props, "jmsproducer");
producer.tell("<order amount=\"100\" currency=\"PLN\" itemId=\"12345\"/>",
    ActorRef.noSender());
```

CamelMessage

The number of Camel components is constantly increasing. The akka-camel module can support these in a plug-and-play manner. Just add them to your application's classpath, define a component-specific endpoint URI and use it to exchange messages over the component-specific protocols or APIs. This is possible because Camel components bind protocol-specific message formats to a Camel-specific [normalized message format](#). The normalized message format hides protocol-specific details from Akka and makes it therefore very easy to support a large number of protocols through a uniform Camel component interface. The akka-camel module further converts mutable Camel messages into immutable representations which are used by Consumer and Producer actors for pattern matching, transformation, serialization or storage. In the above example of the `Orders` Producer, the XML message is put in the body of a newly created Camel Message with an empty set of headers. You can also create a `CamelMessage` yourself with the appropriate body and headers as you see fit.

CamelExtension

The akka-camel module is implemented as an Akka Extension, the `CamelExtension` object. Extensions will only be loaded once per `ActorSystem`, which will be managed by Akka. The `CamelExtension` object provides access to the `Camel` interface. The `Camel` interface in turn provides access to two important Apache Camel objects, the `CamelContext` and the `ProducerTemplate`. Below you can see how you can get access to these Apache Camel objects.

```
ActorSystem system = ActorSystem.create("some-system");
Camel camel = CamelExtension.get(system);
CamelContext camelContext = camel.context();
ProducerTemplate producerTemplate = camel.template();
```

One `CamelExtension` is only loaded once for every one `ActorSystem`, which makes it safe to call the `CamelExtension` at any point in your code to get to the Apache Camel objects associated with it. There is one `CamelContext` and one `ProducerTemplate` for every one `ActorSystem` that uses a `CamelExtension`. Below an example on how to add the ActiveMQ component to the `CamelContext`, which is required when you would like to use the ActiveMQ component.

```
ActorSystem system = ActorSystem.create("some-system");
Camel camel = CamelExtension.get(system);
CamelContext camelContext = camel.context();
// camelContext.addComponent("activemq", ActiveMQComponent.activeMQComponent(
//     "vm://localhost?broker.persistent=false"));
```

The `CamelContext` joins the lifecycle of the `ActorSystem` and `CamelExtension` it is associated with; the `CamelContext` is started when the `CamelExtension` is created, and it is shut down when the associated `ActorSystem` is shut down. The same is true for the `ProducerTemplate`.

The `CamelExtension` is used by both *Producer* and *Consumer* actors to interact with Apache Camel internally. You can access the `CamelExtension` inside a *Producer* or a *Consumer* using the `camel` method, or get straight at the `CamelContext` using the `getCamelContext` method or to the `ProducerTemplate` using the `getProducerTemplate` method. Actors are created and started asynchronously. When a *Consumer* actor is created, the *Consumer* is published at its Camel endpoint (more precisely, the route is added to the `CamelContext` from the `Endpoint` to the actor). When a *Producer* actor is created, a `SendProcessor` and `Endpoint` are created so that the *Producer* can send messages to it. Publication is done asynchronously; setting up an endpoint may still be in progress after you have requested the actor to be created. Some Camel components can take a while to startup, and in some cases you might want to know when the endpoints are activated and ready to be used. The `Camel` interface allows you to find out when the endpoint is activated or deactivated.

```
import akka.actor.ActorRef;
import akka.actor.ActorSystem;
import akka.actor.Props;
import akka.camel.Camel;
import akka.camel.CamelExtension;
import akka.camel.javaapi.UntypedConsumerActor;
import akka.testkit.JavaTestKit;
import akka.testkit.TestKit;
import akka.util.Timeout;
import scala.concurrent.Future;
import scala.concurrent.duration.Duration;
import static java.util.concurrent.TimeUnit.SECONDS;

// ..
ActorSystem system = ActorSystem.create("some-system");
Props props = Props.create(MyConsumer.class);
ActorRef producer = system.actorOf(props, "myproducer");
Camel camel = CamelExtension.get(system);
// get a future reference to the activation of the endpoint of the Consumer Actor
Timeout timeout = new Timeout(Duration.create(10, SECONDS));
Future<ActorRef> activationFuture = camel.activationFutureFor(producer,
    timeout, system.dispatcher());
```

The above code shows that you can get a `Future` to the activation of the route from the endpoint to the actor, or you can wait in a blocking fashion on the activation of the route. An `ActivationTimeoutException` is thrown if the endpoint could not be activated within the specified timeout. Deactivation works in a similar fashion:

```
// ..
system.stop(producer);
// get a future reference to the deactivation of the endpoint of the Consumer Actor
Future<ActorRef> deactivationFuture = camel.deactivationFutureFor(producer,
    timeout, system.dispatcher());
```

Deactivation of a *Consumer* or a *Producer* actor happens when the actor is terminated. For a *Consumer*, the route to the actor is stopped. For a *Producer*, the `SendProcessor` is stopped. A `DeActivationTimeoutException` is thrown if the associated camel objects could not be deactivated within the specified timeout.

5.10.2 Consumer Actors

For objects to receive messages, they must inherit from the `UntypedConsumerActor` class. For example, the following actor class (`Consumer1`) implements the `getEndpointUri` method, which is declared in the `UntypedConsumerActor` class, in order to receive messages from the `file:data/input/actor` Camel endpoint.

```
import akka.camel.CamelMessage;
import akka.camel.javaapi.UntypedConsumerActor;
import akka.event.Logging;
import akka.event.LoggingAdapter;

public class Consumer1 extends UntypedConsumerActor {
    LoggingAdapter log = Logging.getLogger(getContext().system(), this);

    public String getEndpointUri() {
        return "file:data/input/actor";
    }

    public void onReceive(Object message) {
        if (message instanceof CamelMessage) {
            CamelMessage camelMessage = (CamelMessage) message;
            String body = camelMessage.getBodyAs(String.class, getCamelContext());
            log.info("Received message: {}", body);
        } else
            unhandled(message);
    }
}
```

Whenever a file is put into the `data/input/actor` directory, its content is picked up by the Camel `file` component and sent as message to the actor. Messages consumed by actors from Camel endpoints are of type `CamelMessage`. These are immutable representations of Camel messages.

Here's another example that sets the `endpointUri` to `jetty:http://localhost:8877/camel/default`. It causes Camel's `Jetty` component to start an embedded `Jetty` server, accepting HTTP connections from localhost on port 8877.

```
import akka.camel.CamelMessage;
import akka.camel.javaapi.UntypedConsumerActor;

public class Consumer2 extends UntypedConsumerActor {
    public String getEndpointUri() {
        return "jetty:http://localhost:8877/camel/default";
    }

    public void onReceive(Object message) {
        if (message instanceof CamelMessage) {
            CamelMessage camelMessage = (CamelMessage) message;
            String body = camelMessage.getBodyAs(String.class, getCamelContext());
            getSender().tell(String.format("Received message: %s", body), getSelf());
        } else
            unhandled(message);
    }
}
```

After starting the actor, clients can send messages to that actor by POSTing to `http://localhost:8877/camel/default`. The actor sends a response by using the `getSender().tell` method. For returning a message body and headers to the HTTP client the response type should be `CamelMessage`. For any other response type, a new `CamelMessage` object is created by akka-camel with the actor response as message body.

Delivery acknowledgements

With in-out message exchanges, clients usually know that a message exchange is done when they receive a reply from a consumer actor. The reply message can be a `CamelMessage` (or any object which is then internally converted to a `CamelMessage`) on success, and a `Failure` message on failure.

With in-only message exchanges, by default, an exchange is done when a message is added to the consumer actor's mailbox. Any failure or exception that occurs during processing of that message by the consumer actor cannot be reported back to the endpoint in this case. To allow consumer actors to positively or negatively acknowledge the receipt of a message from an in-only message exchange, they need to override the `autoAck` method to return `false`. In this case, consumer actors must reply either with a special `akka.camel.Ack` message (positive acknowledgement) or a `akka.actor.Status.Failure` (negative acknowledgement).

```
import akka.actor.Status;
import akka.camel.Ack;
import akka.camel.CamelMessage;
import akka.camel.javaapi.UntypedConsumerActor;

public class Consumer3 extends UntypedConsumerActor{

    @Override
    public boolean autoAck() {
        return false;
    }

    public String getEndpointUri() {
        return "jms:queue:test";
    }

    public void onReceive(Object message) {
        if (message instanceof CamelMessage) {
            getSender().tell(Ack.getInstance(), getSelf());
            // on success
            // ..
            Exception someException = new Exception("e1");
            // on failure
            getSender().tell(new Status.Failure(someException), getSelf());
        } else
            unhandled(message);
    }
}
```

Consumer timeout

Camel Exchanges (and their corresponding endpoints) that support two-way communications need to wait for a response from an actor before returning it to the initiating client. For some endpoint types, timeout values can be defined in an endpoint-specific way which is described in the documentation of the individual [Camel components](#). Another option is to configure timeouts on the level of consumer actors.

Two-way communications between a Camel endpoint and an actor are initiated by sending the request message to the actor with the `ask` pattern and the actor replies to the endpoint when the response is ready. The `ask` request to the actor can timeout, which will result in the `Exchange` failing with a `TimeoutException` set on the failure of the `Exchange`. The timeout on the consumer actor can be overridden with the `replyTimeout`, as shown below.

```
import akka.camel.CamelMessage;
import akka.camel.javaapi.UntypedConsumerActor;
import scala.concurrent.duration.Duration;
import scala.concurrent.duration.FiniteDuration;

import java.util.concurrent.TimeUnit;

public class Consumer4 extends UntypedConsumerActor {
```

```

private final static FiniteDuration timeout =
    Duration.create(500, TimeUnit.MILLISECONDS);

@Override
public FiniteDuration replyTimeout() {
    return timeout;
}

public String getEndpointUri() {
    return "jetty:http://localhost:8877/camel/default";
}

public void onReceive(Object message) {
    if (message instanceof CamelMessage) {
        CamelMessage camelMessage = (CamelMessage) message;
        String body = camelMessage.getBodyAs(String.class, getCamelContext());
        getSender().tell(String.format("Hello %s", body), getSelf());
    } else
        unhandled(message);
}
}

```

5.10.3 Producer Actors

For sending messages to Camel endpoints, actors need to inherit from the `UntypedProducerActor` class and implement the `getEndpointUri` method.

```

import akka.camel.javaapi.UntypedProducerActor;

public class Producer1 extends UntypedProducerActor {
    public String getEndpointUri() {
        return "http://localhost:8080/news";
    }
}

```

`Producer1` inherits a default implementation of the `onReceive` method from the `UntypedProducerActor` class. To customize a producer actor's default behavior you must override the `UntypedProducerActor.onTransformResponse` and `UntypedProducerActor.onTransformOutgoingMessage` methods. This is explained later in more detail. Producer Actors cannot override the `UntypedProducerActor.onReceive` method.

Any message sent to a Producer actor will be sent to the associated Camel endpoint, in the above example to `http://localhost:8080/news`. The `UntypedProducerActor` always sends messages asynchronously. Response messages (if supported by the configured endpoint) will, by default, be returned to the original sender. The following example uses the `ask` pattern to send a message to a Producer actor and waits for a response.

```

ActorSystem system = ActorSystem.create("some-system");
Props props = Props.create(FirstProducer.class);
ActorRef producer = system.actorOf(props, "myproducer");
Future<Object> future = Patterns.ask(producer, "some request", 1000);

```

The future contains the response `CamelMessage`, or an `AkkaCamelException` when an error occurred, which contains the headers of the response.

Custom Processing

Instead of replying to the initial sender, producer actors can implement custom response processing by overriding the `onRouteResponse` method. In the following example, the response message is forwarded to a target actor instead of being replied to the original sender.

```
import akka.actor.UntypedActor;
import akka.camel.CamelMessage;

public class ResponseReceiver extends UntypedActor{
    public void onReceive(Object message) {
        if(message instanceof CamelMessage) {
            // do something with the forwarded response
        }
    }
}
```

```
import akka.actor.ActorRef;
import akka.camel.javaapi.UntypedProducerActor;

public class Forwarder extends UntypedProducerActor {
    private String uri;
    private ActorRef target;

    public Forwarder(String uri, ActorRef target) {
        this.uri = uri;
        this.target = target;
    }

    public String getEndpointUri() {
        return uri;
    }

    @Override
    public void onRouteResponse(Object message) {
        target.forward(message, getContext());
    }
}
```

```
ActorSystem system = ActorSystem.create("some-system");
Props receiverProps = Props.create(ResponseReceiver.class);
final ActorRef receiver = system.actorOf(receiverProps, "responseReceiver");
ActorRef forwardResponse = system.actorOf(Props.create(
    Forwarder.class, "http://localhost:8080/news/akka", receiver));
// the Forwarder sends out a request to the web page and forwards the response to
// the ResponseReceiver
forwardResponse.tell("some request", ActorRef.noSender());
```

Before producing messages to endpoints, producer actors can pre-process them by overriding the `UntypedProducerActor.onTransformOutgoingMessage` method.

```
import akka.camel.CamelMessage;
import akka.camel.javaapi.UntypedProducerActor;
import akka.dispatch.Mapper;
import akka.japi.Function;

public class Transformer extends UntypedProducerActor{
    private String uri;

    public Transformer(String uri) {
        this.uri = uri;
    }

    public String getEndpointUri() {
        return uri;
    }

    private CamelMessage upperCase(CamelMessage msg) {
        return msg.mapBody(new Mapper<String, String>() {
```

```

    @Override
    public String apply(String body) {
        return body.toUpperCase();
    }
});
}

@Override
public Object onTransformOutgoingMessage(Object message) {
    if(message instanceof CamelMessage) {
        CamelMessage camelMessage = (CamelMessage) message;
        return upperCase(camelMessage);
    } else {
        return message;
    }
}
}
}

```

Producer configuration options

The interaction of producer actors with Camel endpoints can be configured to be one-way or two-way (by initiating in-only or in-out message exchanges, respectively). By default, the producer initiates an in-out message exchange with the endpoint. For initiating an in-only exchange, producer actors have to override the `isOneway` method to return `true`.

```

import akka.camel.javaapi.UntypedProducerActor;

public class OnewaySender extends UntypedProducerActor{
    private String uri;

    public OnewaySender(String uri) {
        this.uri = uri;
    }
    public String getEndpointUri() {
        return uri;
    }

    @Override
    public boolean isOneway() {
        return true;
    }
}

```

Message correlation

To correlate request with response messages, applications can set the `Message.MessageExchangeId` message header.

```

ActorSystem system = ActorSystem.create("some-system");
Props props = Props.create(Orders.class);
ActorRef producer = system.actorOf(props, "jmsproducer");
Map<String, Object> headers = new HashMap<String, Object>();
headers.put(CamelMessage.MessageExchangeId(), "123");
producer.tell(new CamelMessage("<order amount=\"100\" currency=\"PLN\" \" +
    "itemId=\"12345\"/>", headers), ActorRef.noSender());

```

ProducerTemplate

The `UntypedProducerActor` class is a very convenient way for actors to produce messages to Camel endpoints. Actors may also use a Camel `ProducerTemplate` for producing messages to endpoints.

```
import akka.actor.UntypedActor;
import akka.camel.Camel;
import akka.camel.CamelExtension;
import org.apache.camel.ProducerTemplate;

public class MyActor extends UntypedActor {
    public void onReceive(Object message) {
        Camel camel = CamelExtension.get(getContext().system());
        ProducerTemplate template = camel.template();
        template.sendBody("direct:news", message);
    }
}
```

For initiating a two-way message exchange, one of the `ProducerTemplate.request*` methods must be used.

```
import akka.actor.UntypedActor;
import akka.camel.Camel;
import akka.camel.CamelExtension;
import org.apache.camel.ProducerTemplate;

public class RequestBodyActor extends UntypedActor {
    public void onReceive(Object message) {
        Camel camel = CamelExtension.get(getContext().system());
        ProducerTemplate template = camel.template();
        getSender().tell(template.requestBody("direct:news", message), getSelf());
    }
}
```

5.10.4 Asynchronous routing

In-out message exchanges between endpoints and actors are designed to be asynchronous. This is the case for both, consumer and producer actors.

- A consumer endpoint sends request messages to its consumer actor using the `tell` method and the actor returns responses with `getSender().tell` once they are ready.
- A producer actor sends request messages to its endpoint using Camel's asynchronous routing engine. Asynchronous responses are wrapped and added to the producer actor's mailbox for later processing. By default, response messages are returned to the initial sender but this can be overridden by `Producer` implementations (see also description of the `onRouteResponse` method in *Custom Processing*).

However, asynchronous two-way message exchanges, without allocating a thread for the full duration of exchange, cannot be generically supported by Camel's asynchronous routing engine alone. This must be supported by the individual `Camel components` (from which endpoints are created) as well. They must be able to suspend any work started for request processing (thereby freeing threads to do other work) and resume processing when the response is ready. This is currently the case for a `subset of components` such as the `Jetty component`. All other Camel components can still be used, of course, but they will cause allocation of a thread for the duration of an in-out message exchange. There's also a *Asynchronous routing and transformation example* that implements both, an asynchronous consumer and an asynchronous producer, with the `jetty` component.

If the used Camel component is blocking it might be necessary to use a separate *dispatcher* for the producer. The Camel processor is invoked by a child actor of the producer and the dispatcher can be defined in the deployment section of the configuration. For example, if your producer actor has path `/user/integration/output` the dispatcher of the child actor can be defined with:

```
akka.actor.deployment {
  /integration/output/* {
    dispatcher = my-dispatcher
  }
}
```

5.10.5 Custom Camel routes

In all the examples so far, routes to consumer actors have been automatically constructed by akka-camel, when the actor was started. Although the default route construction templates, used by akka-camel internally, are sufficient for most use cases, some applications may require more specialized routes to actors. The akka-camel module provides two mechanisms for customizing routes to actors, which will be explained in this section. These are:

- Usage of *Akka Camel components* to access actors. Any Camel route can use these components to access Akka actors.
- *Intercepting route construction* to actors. This option gives you the ability to change routes that have already been added to Camel. Consumer actors have a hook into the route definition process which can be used to change the route.

Akka Camel components

Akka actors can be accessed from Camel routes using the `actor` Camel component. This component can be used to access any Akka actor (not only consumer actors) from Camel routes, as described in the following sections.

Access to actors

To access actors from custom Camel routes, the `actor` Camel component should be used. It fully supports Camel's *asynchronous routing engine*.

This component accepts the following endpoint URI format:

- [`<actor-path>`]?`<options>`

where `<actor-path>` is the `ActorPath` to the actor. The `<options>` are name-value pairs separated by `&` (i.e. `name1=value1&name2=value2&...`).

URI options

The following URI options are supported:

Name	Type	Default	Description
replyTimeout	Duration	false	The reply timeout, specified in the same way that you use the duration in akka, for instance <code>10 seconds</code> except that in the url it is handy to use a <code>+</code> between the amount and the unit, like for example <code>200+millis</code> See also <i>Consumer timeout</i> .
autoAck	Boolean	true	If set to true, in-only message exchanges are auto-acknowledged when the message is added to the actor's mailbox. If set to false, actors must acknowledge the receipt of the message. See also <i>Delivery acknowledgements</i> .

Here's an actor endpoint URI example containing an actor path:

```
akka://some-system/user/myconsumer?autoAck=false&replyTimeout=100+millis
```

In the following example, a custom route to an actor is created, using the actor's path.

```
import akka.actor.UntypedActor;
import akka.camel.CamelMessage;
import akka.dispatch.Mapper;
import akka.japi.Function;

public class Responder extends UntypedActor{

    public void onReceive(Object message) {
        if (message instanceof CamelMessage) {
            CamelMessage camelMessage = (CamelMessage) message;
            getSender().tell(createResponse(camelMessage), getSelf());
        } else
            unhandled(message);
    }

    private CamelMessage createResponse(CamelMessage msg) {
        return msg.mapBody(new Mapper<String,String>() {
            @Override
            public String apply(String body) {
                return String.format("received %s", body);
            }
        });
    }
}
```

```
import akka.actor.ActorRef;
import akka.camel.internal.component.CamelPath;
import org.apache.camel.builder.RouteBuilder;

public class CustomRouteBuilder extends RouteBuilder{
    private String uri;

    public CustomRouteBuilder(ActorRef responder) {
        uri = CamelPath.toUri(responder);
    }

    public void configure() throws Exception {
        from("jetty:http://localhost:8877/camel/custom").to(uri);
    }
}
```

```
ActorSystem system = ActorSystem.create("some-system");
Camel camel = CamelExtension.get(system);
ActorRef responder = system.actorOf(Props.create(Responder.class), "TestResponder");
camel.context().addRoutes(new CustomRouteBuilder(responder));
```

The *CamelPath.toCamelUri* converts the *ActorRef* to the Camel actor component URI format which points to the actor endpoint as described above. When a message is received on the jetty endpoint, it is routed to the Responder actor, which in return replies back to the client of the HTTP request.

Intercepting route construction

The previous section, *Akka Camel components*, explained how to setup a route to an actor manually. It was the application's responsibility to define the route and add it to the current *CamelContext*. This section explains a more convenient way to define custom routes: akka-camel is still setting up the routes to consumer actors (and adds these routes to the current *CamelContext*) but applications can define extensions to these routes. Extensions can be defined with Camel's *Java DSL* or *Scala DSL*. For example, an extension could be a custom error handler that redelivers messages from an endpoint to an actor's bounded mailbox when the mailbox was full.

The following examples demonstrate how to extend a route to a consumer actor for handling exceptions thrown by that actor.

```

import akka.actor.Status;
import akka.camel.CamelMessage;
import akka.camel.javaapi.UntypedConsumerActor;
import akka.dispatch.Mapper;
import org.apache.camel.builder.Builder;
import org.apache.camel.model.ProcessorDefinition;
import org.apache.camel.model.RouteDefinition;
import scala.Option;

public class ErrorThrowingConsumer extends UntypedConsumerActor{
    private String uri;

    private static Mapper<RouteDefinition, ProcessorDefinition<?>> mapper =
        new Mapper<RouteDefinition, ProcessorDefinition<?>>() {
            public ProcessorDefinition<?> apply(RouteDefinition rd) {
                // Catch any exception and handle it by returning the exception message
                // as response
                return rd.onException(Exception.class).handled(true).
                    transform(Builder.exceptionMessage()).end();
            }
        };

    public ErrorThrowingConsumer(String uri){
        this.uri = uri;
    }

    public String getEndpointUri() {
        return uri;
    }

    public void onReceive(Object message) throws Exception{
        if (message instanceof CamelMessage) {
            CamelMessage camelMessage = (CamelMessage) message;
            String body = camelMessage.getBodyAs(String.class, getCamelContext());
            throw new Exception(String.format("error: %s",body));
        } else
            unhandled(message);
    }

    @Override
    public Mapper<RouteDefinition,
        ProcessorDefinition<?>> getRouteDefinitionHandler() {
        return mapper;
    }

    @Override
    public void preRestart(Throwable reason, Option<Object> message) {
        getSender().tell(new Status.Failure(reason), getSelf());
    }
}

```

The above `ErrorThrowingConsumer` sends the `Failure` back to the sender in `preRestart` because the `Exception` that is thrown in the actor would otherwise just crash the actor, by default the actor would be restarted, and the response would never reach the client of the `Consumer`.

The `akka-camel` module creates a `RouteDefinition` instance by calling `from(endpointUri)` on a `Camel RouteBuilder` (where `endpointUri` is the endpoint URI of the consumer actor) and passes that instance as argument to the route definition handler `*`). The route definition handler then extends the route and returns a `ProcessorDefinition` (in the above example, the `ProcessorDefinition` returned by the `end` method. See the `org.apache.camel.model` package for details). After executing the route definition handler, `akka-camel` finally calls a `to(targetActorUri)` on the returned `ProcessorDefinition` to complete the route to the consumer actor (where `targetActorUri` is the actor component URI as described in *Access to actors*). If the actor cannot be found, a `ActorNotRegisteredException` is thrown.


*) Before passing the RouteDefinition instance to the route definition handler, akka-camel may make some further modifications to it.

5.10.6 Examples

Asynchronous routing and transformation example

This example demonstrates how to implement consumer and producer actors that support *Asynchronous routing* with their Camel endpoints. The sample application transforms the content of the Akka homepage, <http://akka.io>, by replacing every occurrence of *Akka* with *AKKA*. To run this example, add a Boot class that starts the actors. After starting the *Microkernel*, direct the browser to <http://localhost:8875> and the transformed Akka homepage should be displayed. Please note that this example will probably not work if you're behind an HTTP proxy.

The following figure gives an overview how the example actors interact with external systems and with each other. A browser sends a GET request to <http://localhost:8875> which is the published endpoint of the `HttpConsumer` actor. The `HttpConsumer` actor forwards the requests to the `HttpProducer` actor which retrieves the Akka homepage from <http://akka.io>. The retrieved HTML is then forwarded to the `HttpTransformer` actor which replaces all occurrences of *Akka* with *AKKA*. The transformation result is sent back the `HttpConsumer` which finally returns it to the browser.

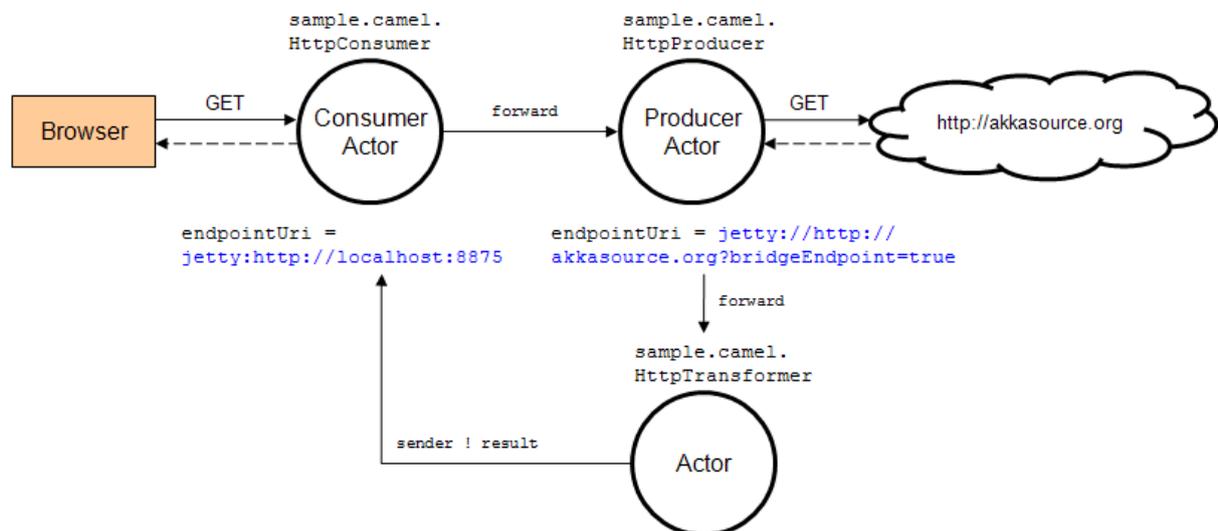

Implementing the example actor classes and wiring them together is rather easy as shown in the following snippet.

```
public class HttpConsumer extends UntypedConsumerActor{
    private ActorRef producer;

    public HttpConsumer(ActorRef producer){
        this.producer = producer;
    }

    public String getEndpointUri() {
        return "jetty:http://0.0.0.0:8875/";
    }

    public void onReceive(Object message) {
        producer.forward(message, getContext());
    }
}
```

```
public class HttpProducer extends UntypedProducerActor{
    private ActorRef transformer;

    public HttpProducer(ActorRef transformer) {
```

```

    this.transformer = transformer;
  }

  public String getEndpointUri() {
    return "jetty://http://akka.io/?bridgeEndpoint=true";
  }

  @Override
  public Object onTransformOutgoingMessage(Object message) {
    if (message instanceof CamelMessage) {
      CamelMessage camelMessage = (CamelMessage) message;
      Set<String> httpPath = new HashSet<String>();
      httpPath.add(Exchange.HTTP_PATH);
      return camelMessage.withHeaders(camelMessage.getHeaders(httpPath));
    } else return super.onTransformOutgoingMessage(message);
  }

  @Override
  public void onRouteResponse(Object message) {
    transformer.forward(message, getContext());
  }
}

```

```

public class HttpTransformer extends UntypedActor{
  public void onReceive(Object message) {
    if (message instanceof CamelMessage) {
      CamelMessage camelMessage = (CamelMessage) message;
      CamelMessage replacedMessage =
        camelMessage.mapBody(new Mapper<Object, String>(){
          @Override
          public String apply(Object body) {
            String text = new String((byte[])body);
            return text.replaceAll("Akka ", "AKKA ");
          }
        });
      getSender().tell(replacedMessage, getSelf());
    } else if (message instanceof Status.Failure) {
      getSender().tell(message, getSelf());
    } else
      unhandled(message);
  }
}

```

```

// Create the actors. this can be done in a Boot class so you can
// run the example in the MicroKernel. Just add the three lines below
// to your boot class.
ActorSystem system = ActorSystem.create("some-system");


final ActorRef httpTransformer = system.actorOf(
  Props.create(HttpTransformer.class));

final ActorRef httpProducer = system.actorOf(
  Props.create(HttpProducer.class, httpTransformer));

final ActorRef httpConsumer = system.actorOf(
  Props.create(HttpConsumer.class, httpProducer));


```

The [jetty endpoints](#) of `HttpConsumer` and `HttpProducer` support asynchronous in-out message exchanges and do not allocate threads for the full duration of the exchange. This is achieved by using [Jetty continuations](#) on the consumer-side and by using [Jetty's asynchronous HTTP client](#) on the producer side. The following high-level sequence diagram illustrates that.

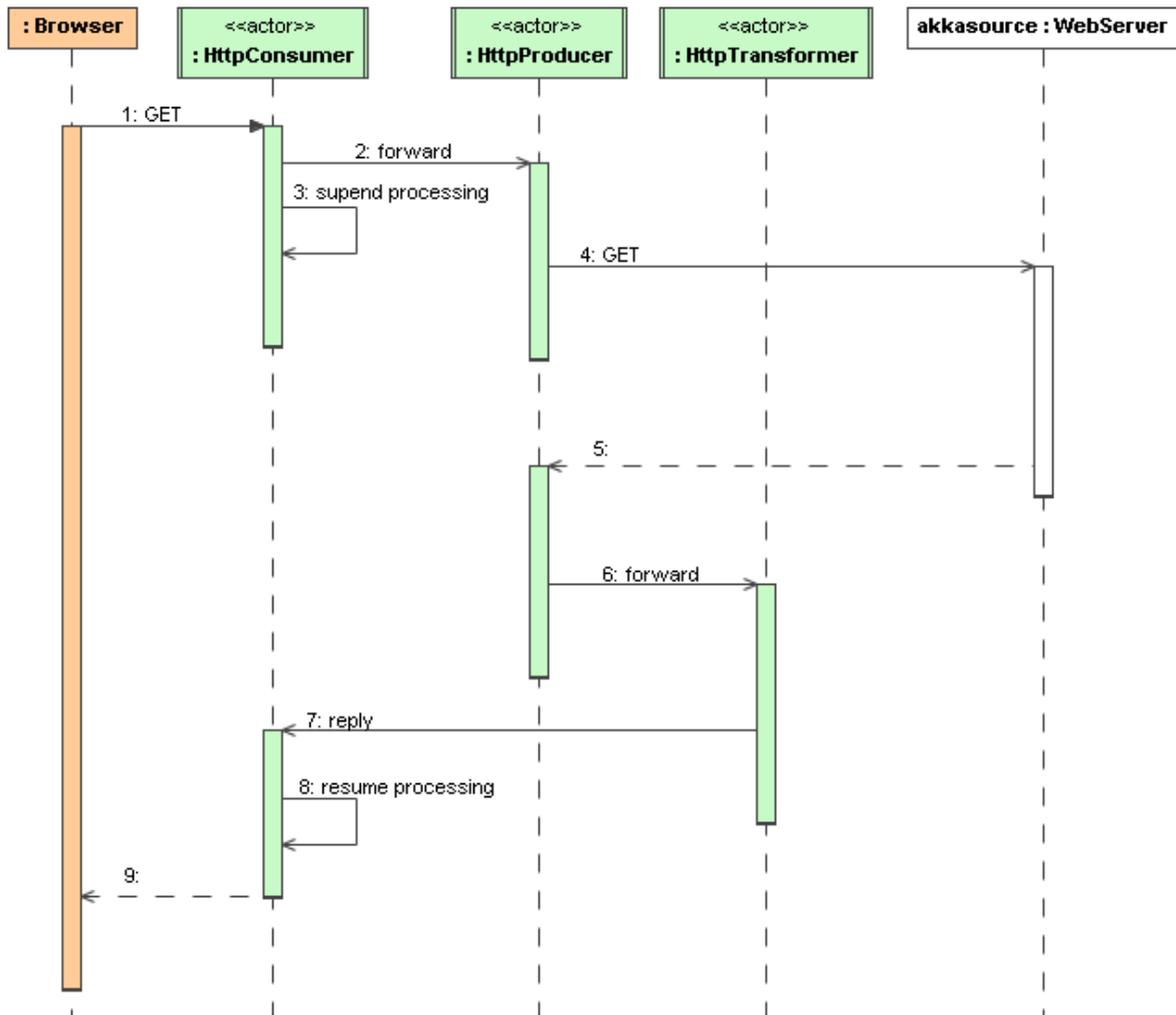

Custom Camel route example

This section also demonstrates the combined usage of a `Producer` and a `Consumer` actor as well as the inclusion of a custom Camel route. The following figure gives an overview.

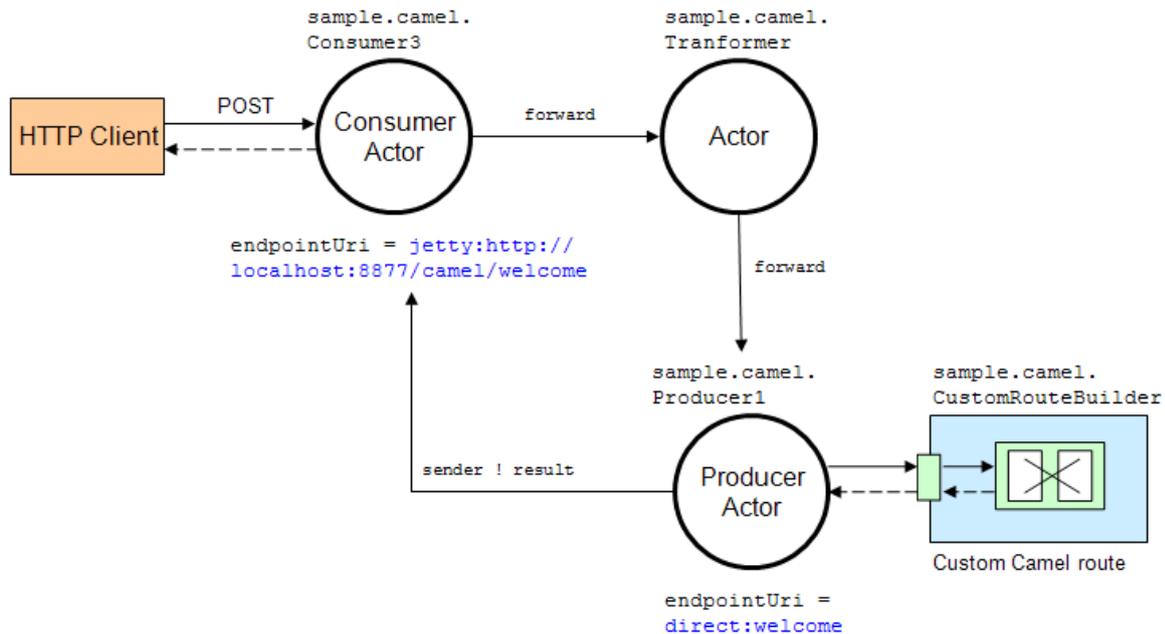

- A consumer actor receives a message from an HTTP client
- It forwards the message to another actor that transforms the message (encloses the original message into hyphens)
- The transformer actor forwards the transformed message to a producer actor
- The producer actor sends the message to a custom Camel route beginning at the `direct:welcome` endpoint
- A processor (transformer) in the custom Camel route prepends “Welcome” to the original message and creates a result message
- The producer actor sends the result back to the consumer actor which returns it to the HTTP client

The consumer, transformer and producer actor implementations are as follows.

```

import akka.actor.ActorRef;
import akka.camel.CamelMessage;
import akka.camel.javaapi.UntypedConsumerActor;

public class Consumer3 extends UntypedConsumerActor{
    private ActorRef transformer;

    public Consumer3(ActorRef transformer){
        this.transformer = transformer;
    }

    public String getEndpointUri() {
        return "jetty:http://0.0.0.0:8877/camel/welcome";
    }

    public void onReceive(Object message) {
        if (message instanceof CamelMessage) {
            CamelMessage camelMessage = (CamelMessage) message;
            // Forward a string representation of the message body to transformer
            String body = camelMessage.getBodyAs(String.class, getCamelContext());
            transformer.forward(camelMessage.withBody(body), getContext());
        } else
            unhandled(message);
    }
}

```

```
import akka.actor.ActorRef;
import akka.actor.UntypedActor;
import akka.camel.CamelMessage;
import akka.dispatch.Mapper;
import akka.japi.Function;

public class Transformer extends UntypedActor {
    private ActorRef producer;

    public Transformer(ActorRef producer) {
        this.producer = producer;
    }

    public void onReceive(Object message) {
        if (message instanceof CamelMessage) {
            // example: transform message body "foo" to "- foo -" and forward result
            // to producer
            CamelMessage camelMessage = (CamelMessage) message;
            CamelMessage transformedMessage =
                camelMessage.mapBody(new Mapper<String, String>() {
                    @Override
                    public String apply(String body) {
                        return String.format("- %s -", body);
                    }
                });
            producer.forward(transformedMessage, getContext());
        } else
            unhandled(message);
    }
}
```

```
import akka.camel.javaapi.UntypedProducerActor;

public class Producer1 extends UntypedProducerActor{
    public String getEndpointUri() {
        return "direct:welcome";
    }
}
```

```
// the below lines can be added to a Boot class, so that you can run the
// example from a MicroKernel
ActorSystem system = ActorSystem.create("some-system");
final ActorRef producer = system.actorOf(Props.create(Producer1.class));
final ActorRef mediator = system.actorOf(Props.create(Transformer.class, producer));
final ActorRef consumer = system.actorOf(Props.create(Consumer3.class, mediator));
CamelExtension.get(system).context().addRoutes(new CustomRouteBuilder());
```

The producer actor knows where to reply the message to because the consumer and transformer actors have forwarded the original sender reference as well. The application configuration and the route starting from `direct:welcome` are done in the code above.

To run the example, add the lines shown in the example to a Boot class and the start the *Microkernel* and POST a message to `http://localhost:8877/camel/welcome`.

```
curl -H "Content-Type: text/plain" -d "Anke" http://localhost:8877/camel/welcome
```

The response should be:

Welcome - Anke -

Quartz Scheduler Example

Here is an example showing how simple is to implement a cron-style scheduler by using the Camel Quartz component in Akka.

The following example creates a “timer” actor which fires a message every 2 seconds:

```
import akka.camel.CamelMessage;
import akka.camel.javaapi.UntypedConsumerActor;

public class MyQuartzActor extends UntypedConsumerActor{
    public String getEndpointUri() {
        return "quartz://example?cron=0/2+*****?";
    }

    public void onReceive(Object message) {
        if (message instanceof CamelMessage) {
            CamelMessage camelMessage = (CamelMessage) message;
            String body = camelMessage.getBodyAs(String.class, getCamelContext());
            System.out.println(String.format("=====> received %s ", body));
        } else
            unhandled(message);
    }
}
```

```
import akka.actor.ActorSystem;
import akka.actor.Props;

public class QuartzSample {
    public static void main(String[] args) {
        ActorSystem system = ActorSystem.create("my-quartz-system");
        system.actorOf(Props.create(MyQuartzActor.class));
    }
}
```

For more information about the Camel Quartz component, see here: <http://camel.apache.org/quartz.html>

5.10.7 Additional Resources

For an introduction to akka-camel 2, see also the Peter Gabryanczyk’s talk [Migrating akka-camel module to Akka 2.x](#).

For an introduction to akka-camel 1, see also the [Appendix E - Akka and Camel \(pdf\)](#) of the book [Camel in Action](#).

Other, more advanced external articles (for version 1) are:

- [Akka Consumer Actors: New Features and Best Practices](#)
- [Akka Producer Actors: New Features and Best Practices](#)

6.1 Event Bus

Originally conceived as a way to send messages to groups of actors, the `EventBus` has been generalized into a set of composable traits implementing a simple interface:

- `public boolean subscribe(S subscriber, C classifier)` subscribes the given subscriber to events with the given classifier
- `public boolean unsubscribe(S subscriber, C classifier)` undoes a specific subscription
- `public void unsubscribe(S subscriber)` undoes all subscriptions for the given subscriber
- `public void publish(E event)` publishes an event, which first is classified according to the specific bus (see [Classifiers](#)) and then published to all subscribers for the obtained classifier

Note: Please note that the `EventBus` does not preserve the sender of the published messages. If you need a reference to the original sender you have to provide it inside the message.

This mechanism is used in different places within Akka, e.g. the [DeathWatch](#) and the [Event Stream](#). Implementations can make use of the specific building blocks presented below.

An event bus must define the following three abstract types:

- `E` is the type of all events published on that bus
- `S` is the type of subscribers allowed to register on that event bus
- `C` defines the classifier to be used in selecting subscribers for dispatching events

The traits below are still generic in these types, but they need to be defined for any concrete implementation.

6.1.1 Classifiers

The classifiers presented here are part of the Akka distribution, but rolling your own in case you do not find a perfect match is not difficult, check the implementation of the existing ones on [github](#).

Lookup Classification

The simplest classification is just to extract an arbitrary classifier from each event and maintaining a set of subscribers for each possible classifier. This can be compared to tuning in on a radio station. The abstract class `LookupEventBus` is still generic in that it abstracts over how to compare subscribers and how exactly to classify. The necessary methods to be implemented are the following:

- `public C classify(E event)` is used for extracting the classifier from the incoming events.
- `public int compareSubscribers(S a, S b)` must define a partial order over the subscribers, expressed as expected from `java.lang.Comparable.compare`.

- `public void publish(E event, S subscriber)` will be invoked for each event for all subscribers which registered themselves for the event's classifier.
- `public int mapSize` determines the initial size of the index data structure used internally (i.e. the expected number of different classifiers).

This classifier is efficient in case no subscribers exist for a particular event.

Subchannel Classification

If classifiers form a hierarchy and it is desired that subscription be possible not only at the leaf nodes, this classification may be just the right one. It can be compared to tuning in on (possibly multiple) radio channels by genre. This classification has been developed for the case where the classifier is just the JVM class of the event and subscribers may be interested in subscribing to all subclasses of a certain class, but it may be used with any classifier hierarchy. The abstract members needed by this classifier are

- `public Subclassification[C] subclassification` provides an object providing `isEqual(a: Classifier, b: Classifier)` and `isSubclass(a: Classifier, b: Classifier)` to be consumed by the other methods of this classifier; this method is called on various occasions, it should be implemented so that it always returns the same object for performance reasons.
- `public C classify(E event)` is used for extracting the classifier from the incoming events.
- `public void publish(E event, S subscriber)` will be invoked for each event for all subscribers which registered themselves for the event's classifier.

This classifier is also efficient in case no subscribers are found for an event, but it uses conventional locking to synchronize an internal classifier cache, hence it is not well-suited to use cases in which subscriptions change with very high frequency (keep in mind that "opening" a classifier by sending the first message will also have to re-check all previous subscriptions).

Scanning Classification

The previous classifier was built for multi-classifier subscriptions which are strictly hierarchical, this classifier is useful if there are overlapping classifiers which cover various parts of the event space without forming a hierarchy. It can be compared to tuning in on (possibly multiple) radio stations by geographical reachability (for old-school radio-wave transmission). The abstract members for this classifier are:

- `public int compareClassifiers(C a, C b)` is needed for determining matching classifiers and storing them in an ordered collection.
- `public int compareSubscribers(S a, S b)` is needed for storing subscribers in an ordered collection.
- `public boolean matches(C classifier, E event)` determines whether a given classifier shall match a given event; it is invoked for each subscription for all received events, hence the name of the classifier.
- `public void publish(E event, S subscriber)` will be invoked for each event for all subscribers which registered themselves for a classifier matching this event.

This classifier takes always a time which is proportional to the number of subscriptions, independent of how many actually match.

Actor Classification

This classification has been developed specifically for implementing *DeathWatch*: subscribers as well as classifiers are of type `ActorRef`. The abstract members are

- `public ActorRef classify(E event)` is used for extracting the classifier from the incoming events.

- `public int mapSize` determines the initial size of the index data structure used internally (i.e. the expected number of different classifiers).

This classifier is still is generic in the event type, and it is efficient for all use cases.

6.1.2 Event Stream

The event stream is the main event bus of each actor system: it is used for carrying *log messages* and *Dead Letters* and may be used by the user code for other purposes as well. It uses *Subchannel Classification* which enables registering to related sets of channels (as is used for `RemoteLifecycleMessage`). The following example demonstrates how a simple subscription works. Given a simple actor:

```
import akka.actor.Props;
import akka.actor.ActorRef;
import akka.actor.ActorSystem;
import akka.actor.UntypedActor;
import akka.actor.DeadLetter;

public class DeadLetterActor extends UntypedActor {
    public void onReceive(Object message) {
        if (message instanceof DeadLetter) {
            System.out.println(message);
        }
    }
}
```

it can be subscribed like this:

```
final ActorSystem system = ActorSystem.create("DeadLetters");
final ActorRef actor = system.actorOf(Props.create(DeadLetterActor.class));
system.eventStream().subscribe(actor, DeadLetter.class);
```

Default Handlers

Upon start-up the actor system creates and subscribes actors to the event stream for logging: these are the handlers which are configured for example in `application.conf`:

```
akka {
  loggers = ["akka.event.Logging$DefaultLogger"]
}
```

The handlers listed here by fully-qualified class name will be subscribed to all log event classes with priority higher than or equal to the configured log-level and their subscriptions are kept in sync when changing the log-level at runtime:

```
system.eventStream.setLogLevel(Logging.DebugLevel());
```

This means that log events for a level which will not be logged are typically not dispatched at all (unless manual subscriptions to the respective event class have been done)

Dead Letters

As described at *Stopping actors*, messages queued when an actor terminates or sent after its death are re-routed to the dead letter mailbox, which by default will publish the messages wrapped in `DeadLetter`. This wrapper holds the original sender, receiver and message of the envelope which was redirected.

Other Uses

The event stream is always there and ready to be used, just publish your own events (it accepts `Object`) and subscribe listeners to the corresponding JVM classes.

6.2 Logging

Logging in Akka is not tied to a specific logging backend. By default log messages are printed to `STDOUT`, but you can plug-in a SLF4J logger or your own logger. Logging is performed asynchronously to ensure that logging has minimal performance impact. Logging generally means IO and locks, which can slow down the operations of your code if it was performed synchronously.

6.2.1 How to Log

Create a `LoggingAdapter` and use the `error`, `warning`, `info`, or `debug` methods, as illustrated in this example:

```
import akka.event.Logging;
import akka.event.LoggingAdapter;

class MyActor extends UntypedActor {
  LoggingAdapter log = Logging.getLogger(getContext().system(), this);

  @Override
  public void preStart() {
    log.debug("Starting");
  }

  @Override
  public void preRestart(Throwable reason, Option<Object> message) {
    log.error(reason, "Restarting due to [{}] when processing [{}]",
      reason.getMessage(), message.isDefined() ? message.get() : "");
  }

  public void onReceive(Object message) {
    if (message.equals("test")) {
      log.info("Received test");
    } else {
      log.warning("Received unknown message: {}", message);
    }
  }
}
```

The first parameter to `Logging.getLogger` could also be any `LoggingBus`, specifically `system.eventStream()`; in the demonstrated case, the actor system's address is included in the `akkaSource` representation of the log source (see [Logging Thread and Akka Source in MDC](#)) while in the second case this is not automatically done. The second parameter to `Logging.getLogger` is the source of this logging channel. The source object is translated to a `String` according to the following rules:

- if it is an `Actor` or `ActorRef`, its path is used
- in case of a `String` it is used as is
- in case of a class an approximation of its `simpleName`
- and in all other cases the `simpleName` of its class

The log message may contain argument placeholders `{}`, which will be substituted if the log level is enabled. Giving more arguments as there are placeholders results in a warning being appended to the log statement (i.e. on the same line with the same severity). You may pass a Java array as the only substitution argument to have its elements be treated individually:

```
final Object[] args = new Object[] { "The", "brown", "fox", "jumps", 42 };
system.log().debug("five parameters: {}, {}, {}, {}, {}", args);
```

The Java Class of the log source is also included in the generated `LogEvent`. In case of a simple string this is replaced with a “marker” class `akka.event.DummyClassForStringSources` in order to allow special treatment of this case, e.g. in the SLF4J event listener which will then use the string instead of the class’ name for looking up the logger instance to use.

Logging of Dead Letters

By default messages sent to dead letters are logged at info level. Existence of dead letters does not necessarily indicate a problem, but it might be, and therefore they are logged by default. After a few messages this logging is turned off, to avoid flooding the logs. You can disable this logging completely or adjust how many dead letters that are logged. During system shutdown it is likely that you see dead letters, since pending messages in the actor mailboxes are sent to dead letters. You can also disable logging of dead letters during shutdown.

```
akka {
  log-dead-letters = 10
  log-dead-letters-during-shutdown = on
}
```

To customize the logging further or take other actions for dead letters you can subscribe to the *Event Stream*.

Auxiliary logging options

Akka has a couple of configuration options for very low level debugging, that makes most sense in for developers and not for operations.

You almost definitely need to have logging set to DEBUG to use any of the options below:

```
akka {
  loglevel = "DEBUG"
}
```

This config option is very good if you want to know what config settings are loaded by Akka:

```
akka {
  # Log the complete configuration at INFO level when the actor system is started.
  # This is useful when you are uncertain of what configuration is used.
  log-config-on-start = on
}
```

If you want very detailed logging of all automatically received messages that are processed by Actors:

```
akka {
  actor {
    debug {
      # enable DEBUG logging of all AutoReceiveMessages (Kill, PoisonPill et.c.)
      autoreceive = on
    }
  }
}
```

If you want very detailed logging of all lifecycle changes of Actors (restarts, deaths etc):

```
akka {
  actor {
    debug {
      # enable DEBUG logging of actor lifecycle changes
      lifecycle = on
    }
  }
}
```

```
}
}
```

If you want very detailed logging of all events, transitions and timers of FSM Actors that extend LoggingFSM:

```
akka {
  actor {
    debug {
      # enable DEBUG logging of all LoggingFSMs for events, transitions and timers
      fsm = on
    }
  }
}
```

If you want to monitor subscriptions (subscribe/unsubscribe) on the ActorSystem.eventStream:

```
akka {
  actor {
    debug {
      # enable DEBUG logging of subscription changes on the eventStream
      event-stream = on
    }
  }
}
```

Auxiliary remote logging options

If you want to see all messages that are sent through remoting at DEBUG log level: (This is logged as they are sent by the transport layer, not by the Actor)

```
akka {
  remote {
    # If this is "on", Akka will log all outbound messages at DEBUG level,
    # if off then they are not logged
    log-sent-messages = on
  }
}
```

If you want to see all messages that are received through remoting at DEBUG log level: (This is logged as they are received by the transport layer, not by any Actor)

```
akka {
  remote {
    # If this is "on", Akka will log all inbound messages at DEBUG level,
    # if off then they are not logged
    log-received-messages = on
  }
}
```

If you want to see message types with payload size in bytes larger than a specified limit at INFO log level:

```
akka {
  remote {
    # Logging of message types with payload size in bytes larger than
    # this value. Maximum detected size per message type is logged once,
    # with an increase threshold of 10%.
    # By default this feature is turned off. Activate it by setting the property to
    # a value in bytes, such as 1000b. Note that for all messages larger than this
    # limit there will be extra performance and scalability cost.
    log-frame-size-exceeding = 1000b
  }
}
```

Also see the logging options for TestKit: *Tracing Actor Invocations*.

Turn Off Logging

To turn off logging you can configure the log levels to be OFF like this.

```
akka {
  stdout-loglevel = "OFF"
  loglevel = "OFF"
}
```

The `stdout-loglevel` is only in effect during system startup and shutdown, and setting it to OFF as well, ensures that nothing gets logged during system startup or shutdown.

6.2.2 Loggers

Logging is performed asynchronously through an event bus. Log events are processed by an event handler actor and it will receive the log events in the same order as they were emitted.

One gotcha is that currently the timestamp is attributed in the event handler, not when actually doing the logging.

You can configure which event handlers are created at system start-up and listen to logging events. That is done using the `loggers` element in the *Configuration*. Here you can also define the log level.

```
akka {
  # Loggers to register at boot time (akka.event.Logging$DefaultLogger logs
  # to STDOUT)
  loggers = ["akka.event.Logging$DefaultLogger"]
  # Options: OFF, ERROR, WARNING, INFO, DEBUG
  loglevel = "DEBUG"
}
```

The default one logs to STDOUT and is registered by default. It is not intended to be used for production. There is also an *SLF4J* logger available in the ‘akka-slf4j’ module.

Example of creating a listener:

```
import akka.event.Logging;
import akka.event.LoggingAdapter;

import akka.event.Logging.InitializeLogger;
import akka.event.Logging.Error;
import akka.event.Logging.Warning;
import akka.event.Logging.Info;
import akka.event.Logging.Debug;

class MyEventListener extends UntypedActor {
  public void onReceive(Object message) {
    if (message instanceof InitializeLogger) {
      getSender().tell(Logging.loggerInitialized(), getSelf());
    } else if (message instanceof Error) {
      // ...
    } else if (message instanceof Warning) {
      // ...
    } else if (message instanceof Info) {
      // ...
    } else if (message instanceof Debug) {
      // ...
    }
  }
}
```

6.2.3 SLF4J

Akka provides a logger for [SL4FJ](#). This module is available in the ‘akka-slf4j.jar’. It has one single dependency; the slf4j-api jar. In runtime you also need a SLF4J backend, we recommend [Logback](#):

```
<dependency>
  <groupId>ch.qos.logback</groupId>
  <artifactId>logback-classic</artifactId>
  <version>1.0.7</version>
</dependency>
```

You need to enable the Slf4jLogger in the ‘loggers’ element in the *Configuration*. Here you can also define the log level of the event bus. More fine grained log levels can be defined in the configuration of the SLF4J backend (e.g. logback.xml).

```
akka {
  loggers = ["akka.event.slf4j.Slf4jLogger"]
  loglevel = "DEBUG"
}
```

The SLF4J logger selected for each log event is chosen based on the Class of the log source specified when creating the LoggingAdapter, unless that was given directly as a string in which case that string is used (i.e. `LoggerFactory.getLogger(Class c)` is used in the first case and `LoggerFactory.getLogger(String s)` in the second).

Note: Beware that the actor system’s name is appended to a String log source if the LoggingAdapter was created giving an ActorSystem to the factory. If this is not intended, give a LoggingBus instead as shown below:

```
final LoggingAdapter log = Logging.getLogger(system.eventStream(), "my.string");
```

Logging Thread and Akka Source in MDC

Since the logging is done asynchronously the thread in which the logging was performed is captured in Mapped Diagnostic Context (MDC) with attribute name `sourceThread`. With Logback the thread name is available with `%X{sourceThread}` specifier within the pattern layout configuration:

```
<appender name="STDOUT" class="ch.qos.logback.core.ConsoleAppender">
  <encoder>
    <pattern>%date{ISO8601} %-5level %logger{36} %X{sourceThread} - %msg%n</pattern>
  </encoder>
</appender>
```

Note: It will probably be a good idea to use the `sourceThread` MDC value also in non-Akka parts of the application in order to have this property consistently available in the logs.

Another helpful facility is that Akka captures the actor’s address when instantiating a logger within it, meaning that the full instance identification is available for associating log messages e.g. with members of a router. This information is available in the MDC with attribute name `akkaSource`:

```
<appender name="STDOUT" class="ch.qos.logback.core.ConsoleAppender">
  <encoder>
    <pattern>%date{ISO8601} %-5level %logger{36} %X{akkaSource} - %msg%n</pattern>
  </encoder>
</appender>
```

For more details on what this attribute contains—also for non-actors—please see [How to Log](#).

More accurate timestamps for log output in MDC

Akka's logging is asynchronous which means that the timestamp of a log entry is taken from when the underlying logger implementation is called, which can be surprising at first. If you want to more accurately output the timestamp, use the MDC attribute `akkaTimestamp`:

```
<appender name="STDOUT" class="ch.qos.logback.core.ConsoleAppender">
  <encoder>
    <pattern>%X{akkaTimestamp} %-5level %logger{36} %X{akkaSource} - %msg%n</pattern>
  </encoder>
</appender>
```

6.3 Scheduler

Sometimes the need for making things happen in the future arises, and where do you go look then? Look no further than `ActorSystem`! There you find the `scheduler` method that returns an instance of `akka.actor.Scheduler`, this instance is unique per `ActorSystem` and is used internally for scheduling things to happen at specific points in time.

You can schedule sending of messages to actors and execution of tasks (functions or `Runnable`). You will get a `Cancellable` back that you can call `cancel` on to cancel the execution of the scheduled operation.

Warning: The default implementation of `Scheduler` used by Akka is based on job buckets which are emptied according to a fixed schedule. It does not execute tasks at the exact time, but on every tick, it will run everything that is (over)due. The accuracy of the default `Scheduler` can be modified by the `akka.scheduler.tick-duration` configuration property.

6.3.1 Some examples

Schedule to send the “foo”-message to the `testActor` after 50ms:

```
import akka.actor.Props;
import scala.concurrent.duration.Duration;
import java.util.concurrent.TimeUnit;

system.scheduler().scheduleOnce(Duration.create(50, TimeUnit.MILLISECONDS),
    testActor, "foo", system.dispatcher(), null);
```

Schedule a `Runnable`, that sends the current time to the `testActor`, to be executed after 50ms:

```
system.scheduler().scheduleOnce(Duration.create(50, TimeUnit.MILLISECONDS),
    new Runnable() {
        @Override
        public void run() {
            testActor.tell(System.currentTimeMillis(), ActorRef.noSender());
        }
    }, system.dispatcher());
```

Warning: If you schedule `Runnable` instances you should be extra careful to not pass or close over unstable references. In practice this means that you should not call methods on the enclosing `Actor` from within the `Runnable`. If you need to schedule an invocation it is better to use the `schedule()` variant accepting a message and an `ActorRef` to schedule a message to self (containing the necessary parameters) and then call the method when the message is received.

Schedule to send the “Tick”-message to the `tickActor` after 0ms repeating every 50ms:

```

import akka.actor.Props;
import scala.concurrent.duration.Duration;
import java.util.concurrent.TimeUnit;
import akka.actor.UntypedActor;
import akka.actor.Cancellable;

class Ticker extends UntypedActor {
  @Override
  public void onReceive(Object message) {
    if (message.equals("Tick")) {
      // Do something
    } else {
      unhandled(message);
    }
  }
}

ActorRef tickActor = system.actorOf(Props.create(Ticker.class, this));

//This will schedule to send the Tick-message
//to the tickActor after 0ms repeating every 50ms
Cancellable cancellable = system.scheduler().schedule(Duration.Zero(),
Duration.create(50, TimeUnit.MILLISECONDS), tickActor, "Tick",
system.dispatcher(), null);

//This cancels further Ticks to be sent
cancellable.cancel();

```

6.3.2 From akka.actor.ActorSystem

```

/**
 * Light-weight scheduler for running asynchronous tasks after some deadline
 * in the future. Not terribly precise but cheap.
 */
def scheduler: Scheduler

```

6.3.3 The Scheduler Interface for Implementors

The actual scheduler implementation is loaded reflectively upon ActorSystem start-up, which means that it is possible to provide a different one using the akka.scheduler.implementation configuration property. The referenced class must implement the following interface:

```

/**
 * An Akka scheduler service. This one needs one special behavior: if
 * Closeable, it MUST execute all outstanding tasks upon .close() in order
 * to properly shutdown all dispatchers.
 *
 * Furthermore, this timer service MUST throw IllegalStateException if it
 * cannot schedule a task. Once scheduled, the task MUST be executed. If
 * executed upon close(), the task may execute before its timeout.
 *
 * Scheduler implementation are loaded reflectively at ActorSystem start-up
 * with the following constructor arguments:
 * 1) the system's com.typesafe.config.Config (from system.settings.config)
 * 2) a akka.event.LoggingAdapter
 * 3) a java.util.concurrent.ThreadFactory
 */
public abstract class AbstractScheduler extends AbstractSchedulerBase {

/**

```

```

* Schedules a function to be run repeatedly with an initial delay and
* a frequency. E.g. if you would like the function to be run after 2
* seconds and thereafter every 100ms you would set delay = Duration(2,
* TimeUnit.SECONDS) and interval = Duration(100, TimeUnit.MILLISECONDS)
*/
@Override
public abstract Cancellable schedule(FiniteDuration initialDelay,
    FiniteDuration interval, Runnable runnable, ExecutionContext executor);

/**
* Schedules a Runnable to be run once with a delay, i.e. a time period that
* has to pass before the runnable is executed.
*/
@Override
public abstract Cancellable scheduleOnce(FiniteDuration delay, Runnable runnable,
    ExecutionContext executor);

/**
* The maximum supported task frequency of this scheduler, i.e. the inverse
* of the minimum time interval between executions of a recurring task, in Hz.
*/
@Override
public abstract double maxFrequency();
}

```

6.3.4 The Cancellable interface

Scheduling a task will result in a Cancellable (or throw an `IllegalStateException` if attempted after the scheduler's shutdown). This allows you to cancel something that has been scheduled for execution.

Warning: This does not abort the execution of the task, if it had already been started. Check the return value of `cancel` to detect whether the scheduled task was canceled or will (eventually) have run.

```

/**
* Signifies something that can be cancelled
* There is no strict guarantee that the implementation is thread-safe,
* but it should be good practice to make it so.
*/
trait Cancellable {
  /**
  * Cancels this Cancellable and returns true if that was successful.
  * If this cancellable was (concurrently) cancelled already, then this method
  * will return false although isCancelled will return true.
  *
  * Java & Scala API
  */
  def cancel(): Boolean

  /**
  * Returns true if and only if this Cancellable has been successfully cancelled
  *
  * Java & Scala API
  */
  def isCancelled: Boolean
}

```

6.4 Duration

Durations are used throughout the Akka library, wherefore this concept is represented by a special data type, `scala.concurrent.duration.Duration`. Values of this type may represent infinite (`Duration.Inf`, `Duration.MinusInf`) or finite durations, or be `Duration.Undefined`.

6.4.1 Finite vs. Infinite

Since trying to convert an infinite duration into a concrete time unit like seconds will throw an exception, there are different types available for distinguishing the two kinds at compile time:

- `FiniteDuration` is guaranteed to be finite, calling `toNanos` and friends is safe
- `Duration` can be finite or infinite, so this type should only be used when finite-ness does not matter; this is a supertype of `FiniteDuration`

6.4.2 Scala

In Scala durations are constructable using a mini-DSL and support all expected arithmetic operations:

```
import scala.concurrent.duration._

val fivesec = 5.seconds
val threemillis = 3.millis
val diff = fivesec - threemillis
assert(diff < fivesec)
val fourmillis = threemillis * 4 / 3 // you cannot write it the other way around
val n = threemillis / (1 millisecond)
```

Note: You may leave out the dot if the expression is clearly delimited (e.g. within parentheses or in an argument list), but it is recommended to use it if the time unit is the last token on a line, otherwise semi-colon inference might go wrong, depending on what starts the next line.

6.4.3 Java

Java provides less syntactic sugar, so you have to spell out the operations as method calls instead:

```
import scala.concurrent.duration.Duration;
import scala.concurrent.duration.Deadline;

final Duration fivesec = Duration.create(5, "seconds");
final Duration threemillis = Duration.create("3 millis");
final Duration diff = fivesec.minus(threemillis);
assert diff.lt(fivesec);
assert Duration.Zero().lt(Duration.Inf());
```

6.4.4 Deadline

Durations have a brother named `Deadline`, which is a class holding a representation of an absolute point in time, and support deriving a duration from this by calculating the difference between now and the deadline. This is useful when you want to keep one overall deadline without having to take care of the book-keeping wrt. the passing of time yourself:

```
val deadline = 10.seconds.fromNow
// do something
val rest = deadline.timeLeft
```

In Java you create these from durations:

```
final Deadline deadline = Duration.create(10, "seconds").fromNow();
final Duration rest = deadline.timeLeft();
```

6.5 Circuit Breaker

6.5.1 Why are they used?

A circuit breaker is used to provide stability and prevent cascading failures in distributed systems. These should be used in conjunction with judicious timeouts at the interfaces between remote systems to prevent the failure of a single component from bringing down all components.


As an example, we have a web application interacting with a remote third party web service. Let's say the third party has oversold their capacity and their database melts down under load. Assume that the database fails in such a way that it takes a very long time to hand back an error to the third party web service. This in turn makes calls fail after a long period of time. Back to our web application, the users have noticed that their form submissions take much longer seeming to hang. Well the users do what they know to do which is use the refresh button, adding more requests to their already running requests. This eventually causes the failure of the web application due to resource exhaustion. This will affect all users, even those who are not using functionality dependent on this third party web service.

Introducing circuit breakers on the web service call would cause the requests to begin to fail-fast, letting the user know that something is wrong and that they need not refresh their request. This also confines the failure behavior to only those users that are using functionality dependent on the third party, other users are no longer affected as there is no resource exhaustion. Circuit breakers can also allow savvy developers to mark portions of the site that use the functionality unavailable, or perhaps show some cached content as appropriate while the breaker is open.

The Akka library provides an implementation of a circuit breaker called `akka.pattern.CircuitBreaker` which has the behavior described below.

6.5.2 What do they do?

- **During normal operation, a circuit breaker is in the *Closed* state:**
 - Exceptions or calls exceeding the configured *callTimeout* increment a failure counter
 - Successes reset the failure count to zero
 - When the failure counter reaches a *maxFailures* count, the breaker is tripped into *Open* state
- **While in *Open* state:**
 - All calls fail-fast with a `CircuitBreakerOpenException`
 - After the configured *resetTimeout*, the circuit breaker enters a *Half-Open* state
- **In *Half-Open* state:**
 - The first call attempted is allowed through without failing fast
 - All other calls fail-fast with an exception just as in *Open* state
 - If the first call succeeds, the breaker is reset back to *Closed* state
 - If the first call fails, the breaker is tripped again into the *Open* state for another full *resetTimeout*
- **State transition listeners:**
 - Callbacks can be provided for every state entry via *onOpen*, *onClose*, and *onHalfOpen*
 - These are executed in the `ExecutionContext` provided.

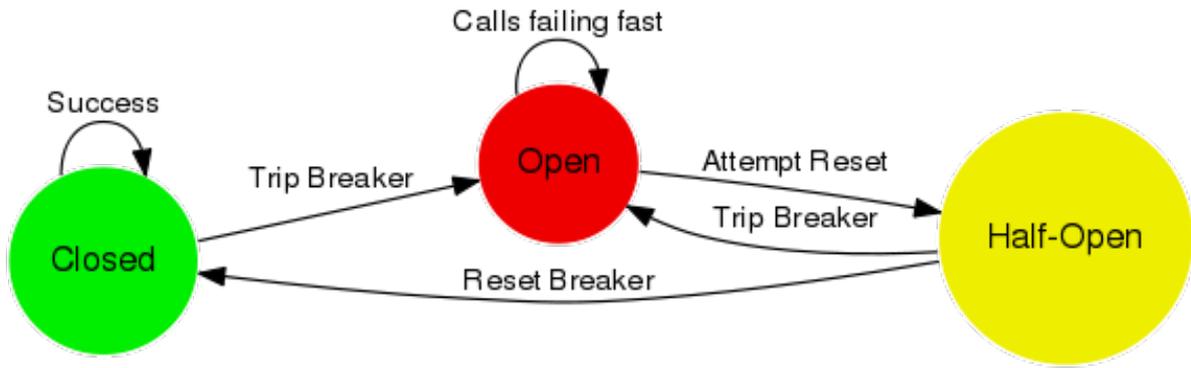

6.5.3 Examples

Initialization

Here's how a `CircuitBreaker` would be configured for:

- 5 maximum failures
- a call timeout of 10 seconds
- a reset timeout of 1 minute

Scala

```

import scala.concurrent.duration._
import akka.pattern.CircuitBreaker
import akka.pattern.pipe
import akka.actor.Actor
import akka.actor.ActorLogging
import scala.concurrent.Future
import akka.event.Logging

class DangerousActor extends Actor with ActorLogging {
  import context.dispatcher

  val breaker =
    new CircuitBreaker(context.system.scheduler,
      maxFailures = 5,
      callTimeout = 10.seconds,
      resetTimeout = 1.minute).onOpen(notifyMeOnOpen())

  def notifyMeOnOpen(): Unit =
    log.warning("My CircuitBreaker is now open, and will not close for one minute")

```

Java

```

import akka.actor.UntypedActor;
import scala.concurrent.Future;
import akka.event.LoggingAdapter;
import scala.concurrent.duration.Duration;
import akka.pattern.CircuitBreaker;
import akka.event.Logging;

import static akka.pattern.Patterns.pipe;
import static akka.dispatch.Futures.future;

```

```
import java.util.concurrent.Callable;

public class DangerousJavaActor extends UntypedActor {

    private final CircuitBreaker breaker;
    private final LoggingAdapter log = Logging.getLogger(getContext().system(), this);

    public DangerousJavaActor() {
        this.breaker = new CircuitBreaker(
            getContext().dispatcher(), getContext().system().scheduler(),
            5, Duration.create(10, "s"), Duration.create(1, "m"))
            .onOpen(new Runnable() {
                public void run() {
                    notifyMeOnOpen();
                }
            });
    }

    public void notifyMeOnOpen() {
        log.warning("My CircuitBreaker is now open, and will not close for one minute");
    }
}
```

Call Protection

Here's how the `CircuitBreaker` would be used to protect an asynchronous call as well as a synchronous one:

Scala

```
def dangerousCall: String = "This really isn't that dangerous of a call after all"

def receive = {
    case "is my middle name" =>
        breaker.withCircuitBreaker(Future(dangerousCall)) pipeTo sender
    case "block for me" =>
        sender ! breaker.withSyncCircuitBreaker(dangerousCall)
}
```

Java

```
public String dangerousCall() {
    return "This really isn't that dangerous of a call after all";
}

@Override
public void onReceive(Object message) {
    if (message instanceof String) {
        String m = (String) message;
        if ("is my middle name".equals(m)) {
            final Future<String> f = future(
                new Callable<String>() {
                    public String call() {
                        return dangerousCall();
                    }
                }, getContext().dispatcher());

            pipe(breaker.callWithCircuitBreaker(
                new Callable<Future<String>>() {
                    public Future<String> call() throws Exception {
```

```

        return f;
    }
    }), getContext().dispatcher().to(getSender());
}
if ("block for me".equals(m)) {
    getSender().tell(breaker
        .callWithSyncCircuitBreaker(
            new Callable<String>() {
                @Override
                public String call() throws Exception {
                    return dangerousCall();
                }
            }
        ), getSelf());
}
}
}
}

```

Note: Using the `CircuitBreaker` companion object's `apply` or `create` methods will return a `CircuitBreaker` where callbacks are executed in the caller's thread. This can be useful if the asynchronous `Future` behavior is unnecessary, for example invoking a synchronous-only API.

6.6 Akka Extensions

If you want to add features to Akka, there is a very elegant, but powerful mechanism for doing so. It's called Akka Extensions and is comprised of 2 basic components: an `Extension` and an `ExtensionId`.

Extensions will only be loaded once per `ActorSystem`, which will be managed by Akka. You can choose to have your `Extension` loaded on-demand or at `ActorSystem` creation time through the Akka configuration. Details on how to make that happens are below, in the "Loading from Configuration" section.

Warning: Since an extension is a way to hook into Akka itself, the implementor of the extension needs to ensure the thread safety of his/her extension.

6.6.1 Building an Extension

So let's create a sample extension that just lets us count the number of times something has happened.

First, we define what our `Extension` should do:

```

import akka.actor.*;
import java.util.concurrent.atomic.AtomicLong;

public class CountExtensionImpl implements Extension {
    //Since this Extension is a shared instance
    // per ActorSystem we need to be threadsafe
    private final AtomicLong counter = new AtomicLong(0);

    //This is the operation this Extension provides
    public long increment() {
        return counter.incrementAndGet();
    }
}

```

Then we need to create an `ExtensionId` for our extension so we can grab ahold of it.

```

import akka.actor.*;
import java.util.concurrent.atomic.AtomicLong;

```

```

public class CountExtension extends AbstractExtensionId<CountExtensionImpl>
  implements ExtensionIdProvider {
  //This will be the identifier of our CountExtension
  public final static CountExtension CountExtensionProvider = new CountExtension();

  private CountExtension() {}

  //The lookup method is required by ExtensionIdProvider,
  // so we return ourselves here, this allows us
  // to configure our extension to be loaded when
  // the ActorSystem starts up
  public CountExtension lookup() {
    return CountExtension.CountExtensionProvider; //The public static final
  }

  //This method will be called by Akka
  // to instantiate our Extension
  public CountExtensionImpl createExtension(ExtendedActorSystem system) {
    return new CountExtensionImpl();
  }
}

```

Wicked! Now all we need to do is to actually use it:

```

// typically you would use static import of the
// CountExtension.CountExtensionProvider field
CountExtension.CountExtensionProvider.get(system).increment();

```

Or from inside of an Akka Actor:

```

public class MyActor extends UntypedActor {
  public void onReceive(Object msg) {
    // typically you would use static import of the
    // CountExtension.CountExtensionProvider field
    CountExtension.CountExtensionProvider.get(getContext().system()).increment();
  }
}

```

That's all there is to it!

6.6.2 Loading from Configuration

To be able to load extensions from your Akka configuration you must add FQCNs of implementations of either `ExtensionId` or `ExtensionIdProvider` in the “akka.extensions” section of the config you provide to your `ActorSystem`.

```

akka {
  extensions = ["docs.extension.ExtensionDocTest.CountExtension"]
}

```

6.6.3 Applicability

The sky is the limit! By the way, did you know that Akka's Typed Actors, Serialization and other features are implemented as Akka Extensions?

Application specific settings

The *Configuration* can be used for application specific settings. A good practice is to place those settings in an Extension.

Sample configuration:

```
myapp {
  db {
    uri = "mongodb://example1.com:27017,example2.com:27017"
  }
  circuit-breaker {
    timeout = 30 seconds
  }
}
```

The Extension:

```
import akka.actor.Extension;
import akka.actor.AbstractExtensionId;
import akka.actor.ExtensionIdProvider;
import akka.actor.ActorSystem;
import akka.actor.ExtendedActorSystem;
import scala.concurrent.duration.Duration;
import com.typesafe.config.Config;
import java.util.concurrent.TimeUnit;

public class SettingsImpl implements Extension {

  public final String DB_URI;
  public final Duration CIRCUIT_BREAKER_TIMEOUT;

  public SettingsImpl(Config config) {
    DB_URI = config.getString("myapp.db.uri");
    CIRCUIT_BREAKER_TIMEOUT =
      Duration.create(config.getMilliseconds("myapp.circuit-breaker.timeout"),
        TimeUnit.MILLISECONDS);
  }
}

public class Settings extends AbstractExtensionId<SettingsImpl>
  implements ExtensionIdProvider {
  public final static Settings SettingsProvider = new Settings();

  private Settings() {}

  public Settings lookup() {
    return Settings.SettingsProvider;
  }

  public SettingsImpl createExtension(ExtendedActorSystem system) {
    return new SettingsImpl(system.settings().config());
  }
}
```

Use it:

```
public class MyActor extends UntypedActor {
  // typically you would use static import of the Settings.SettingsProvider field
  final SettingsImpl settings =
    Settings.SettingsProvider.get(getContext().system());
  Connection connection =
    connect(settings.DB_URI, settings.CIRCUIT_BREAKER_TIMEOUT);
}
```

6.7 Durable Mailboxes

6.7.1 Overview

A durable mailbox is a mailbox which stores the messages on durable storage. What this means in practice is that if there are pending messages in the actor's mailbox when the node of the actor resides on crashes, then when you restart the node, the actor will be able to continue processing as if nothing had happened; with all pending messages still in its mailbox.

You configure durable mailboxes through the dispatcher or the actor deployment (see *Mailboxes*). The actor is oblivious to which type of mailbox it is using.

This gives you an excellent way of creating bulkheads in your application, where groups of actors sharing the same dispatcher also share the same backing storage. Read more about that in the *dispatchers-scala* documentation.

One basic file based durable mailbox is provided by Akka out-of-the-box. Other implementations can easily be added. Some are available as separate community Open Source projects, such as:

- [AMQP Durable Mailbox](#)

A durable mailbox is like any other mailbox not likely to be transactional. It's possible if the actor crashes after receiving a message, but before completing processing of it, that the message could be lost.

Warning: A durable mailbox typically doesn't work with blocking message send, i.e. the message send operations that are relying on futures; `ask`. If the node has crashed and then restarted, the thread that was blocked waiting for the reply is gone and there is no way we can deliver the message.

6.7.2 File-based durable mailbox

This mailbox is backed by a journaling transaction log on the local file system. It is the simplest to use since it does not require an extra infrastructure piece to administer, but it is usually sufficient and just what you need.

In the configuration of the dispatcher you specify the fully qualified class name of the mailbox:

```
my-dispatcher {
  mailbox-type = akka.actor.mailbox.filebased.FileBasedMailboxType
}
```

Here is an example of how to create an actor with a durable dispatcher:

```
import akka.actor.Props;
import akka.actor.ActorRef;

ActorRef myActor = system.actorOf(Props.create(MyUntypedActor.class)
    withDispatcher("my-dispatcher"), "myactor");
```

You can also configure and tune the file-based durable mailbox. This is done in the `akka.actor.mailbox.file-based` section in the *Configuration*.

```
#####
# Akka File Mailboxes Reference Config File #
#####

# This is the reference config file that contains all the default settings.
# Make your edits/overrides in your application.conf.
#
# For more information see <https://github.com/robey/kestrel/>

akka {
  actor {
    mailbox {
```

```
file-based {
  # directory below which this queue resides
  directory-path = "./_mb"

  # attempting to add an item after the queue reaches this size (in items)
  # will fail.
  max-items = 2147483647

  # attempting to add an item after the queue reaches this size (in bytes)
  # will fail.
  max-size = 2147483647 bytes

  # attempting to add an item larger than this size (in bytes) will fail.
  max-item-size = 2147483647 bytes

  # maximum expiration time for this queue (seconds).
  max-age = 0s

  # maximum journal size before the journal should be rotated.
  max-journal-size = 16 MiB

  # maximum size of a queue before it drops into read-behind mode.
  max-memory-size = 128 MiB

  # maximum overflow (multiplier) of a journal file before we re-create it.
  max-journal-overflow = 10

  # absolute maximum size of a journal file until we rebuild it,
  # no matter what.
  max-journal-size-absolute = 9223372036854775807 bytes

  # whether to drop older items (instead of newer) when the queue is full
  discard-old-when-full = on

  # whether to keep a journal file at all
  keep-journal = on

  # whether to sync the journal after each transaction
  sync-journal = off

  # circuit breaker configuration
  circuit-breaker {
    # maximum number of failures before opening breaker
    max-failures = 3

    # duration of time beyond which a call is assumed to be timed out and
    # considered a failure
    call-timeout = 3 seconds

    # duration of time to wait until attempting to reset the breaker during
    # which all calls fail-fast
    reset-timeout = 30 seconds
  }
}
}
```

6.7.3 How to implement a durable mailbox

Here is an example of how to implement a custom durable mailbox. Essentially it consists of a configurator (MailboxType) and a queue implementation (DurableMessageQueue).

The envelope contains the message sent to the actor, and information about sender. It is the envelope that needs to be stored. As a help utility you can extend `DurableMessageQueueWithSerialization` to serialize and deserialize the envelope using the ordinary *serialization-scala* mechanism. This optional and you may store the envelope data in any way you like. Durable mailboxes are an excellent fit for usage of circuit breakers. These are described in the *Circuit Breaker* documentation.

```
import scala.Option;
import com.typesafe.config.Config;
import akka.actor.ActorRef;
import akka.actor.ActorSystem;
import akka.actor.ExtendedActorSystem;
import akka.dispatch.MailboxType;
import akka.dispatch.MessageQueue;

public class MyDurableMailboxType implements MailboxType {

    public MyDurableMailboxType(ActorSystem.Settings settings, Config config) {
    }

    @Override
    public MessageQueue create(Option<ActorRef> owner,
        Option<ActorSystem> system) {
        if (owner.isEmpty())
            throw new IllegalArgumentException("requires an owner " +
                "(i.e. does not work with BalancingDispatcher)");
        return new MyDurableMessageQueue(owner.get(),
            (ExtendedActorSystem) system.get());
    }
}

import java.util.concurrent.ConcurrentLinkedQueue;
import java.util.concurrent.Callable;
import scala.concurrent.duration.Duration;
import akka.actor.ActorRef;
import akka.actor.ExtendedActorSystem;
import akka.actor.mailbox.DurableMessageQueueWithSerialization;
import akka.dispatch.Envelope;
import akka.dispatch.MessageQueue;
import akka.pattern.CircuitBreaker;

public class MyDurableMessageQueue extends DurableMessageQueueWithSerialization {

    public MyDurableMessageQueue(ActorRef owner, ExtendedActorSystem system) {
        super(owner, system);
    }

    private final QueueStorage storage = new QueueStorage();
    // A real-world implementation would use configuration to set the last
    // three parameters below
    private final CircuitBreaker breaker = CircuitBreaker.create(system().scheduler(),
        5, Duration.create(30, "seconds"), Duration.create(1, "minute"));

    @Override
    public void enqueue(ActorRef receiver, final Envelope envelope) {
        breaker.callWithSyncCircuitBreaker(new Callable<Object>() {
            @Override
            public Object call() {
                byte[] data = serialize(envelope);
            }
        });
    }
}
```

```

        storage.push(data);
        return null;
    }
    });
}

@Override
public Envelope dequeue() {
    return breaker.callWithSyncCircuitBreaker(new Callable<Envelope>() {
        @Override
        public Envelope call() {
            byte[] data = storage.pull();
            if (data == null)
                return null;
            else
                return deserialize(data);
        }
    });
}

@Override
public boolean hasMessages() {
    return breaker.callWithSyncCircuitBreaker(new Callable<Boolean>() {
        @Override
        public Boolean call() {
            return !storage.isEmpty();
        }
    });
}

@Override
public int numberOfMessages() {
    return breaker.callWithSyncCircuitBreaker(new Callable<Integer>() {
        @Override
        public Integer call() {
            return storage.size();
        }
    });
}

/**
 * Called when the mailbox is disposed.
 * An ordinary mailbox would send remaining messages to deadLetters,
 * but the purpose of a durable mailbox is to continue
 * with the same message queue when the actor is started again.
 */
@Override
public void cleanUp(ActorRef owner, MessageQueue deadLetters) {}

// dummy queue storage ...
}

```

For more inspiration you can look at the old implementations based on Redis, MongoDB, Beanstalk, and ZooKeeper, which can be found in Akka git repository tag v2.0.1.

6.8 Microkernel

The purpose of the Akka Microkernel is to offer a bundling mechanism so that you can distribute an Akka application as a single payload, without the need to run in a Java Application Server or manually having to create a launcher script.

The Akka Microkernel is included in the Akka download found at [downloads](#).

To run an application with the microkernel you need to create a Bootable class that handles the startup and shutdown the application. An example is included below.

Put your application jar in the `deploy` directory to have it automatically loaded.

To start the kernel use the scripts in the `bin` directory, passing the boot classes for your application. Example command (on a unix-based system):

```
bin/akka sample.kernel.hello.HelloKernel
```

Use `Ctrl-C` to interrupt and exit the microkernel.

On a Windows machine you can also use the `bin/akka.bat` script.

The code for the Hello Kernel example (see the `HelloKernel` class for an example of creating a Bootable):

```
/**
 * Copyright (C) 2009-2013 Typesafe Inc. <http://www.typesafe.com>
 */
package sample.kernel.hello.java;

import akka.actor.ActorRef;
import akka.actor.UntypedActor;
import akka.actor.ActorSystem;
import akka.actor.Props;
import akka.kernel.Bootable;

public class HelloKernel implements Bootable {
    final ActorSystem system = ActorSystem.create("hellokernel");

    public static class HelloActor extends UntypedActor {
        final ActorRef worldActor = getContext().actorOf(
            Props.create(WorldActor.class));

        public void onReceive(Object message) {
            if (message == "start")
                worldActor.tell("Hello", getSelf());
            else if (message instanceof String)
                System.out.println(String.format("Received message '%s'", message));
            else
                unhandled(message);
        }
    }

    public static class WorldActor extends UntypedActor {
        public void onReceive(Object message) {
            if (message instanceof String)
                getSender().tell(((String) message).toUpperCase() + " world!",
                    getSelf());
            else
                unhandled(message);
        }
    }

    public void startup() {
        system.actorOf(Props.create(HelloActor.class)).tell("start", null);
    }

    public void shutdown() {
        system.shutdown();
    }
}
```

6.8.1 Distribution of microkernel application

To make a distribution package of the microkernel and your application the `akka-sbt-plugin` provides `AkkaKernelPlugin`. It creates the directory structure, with jar files, configuration files and start scripts.

To use the sbt plugin you define it in your `project/plugins.sbt`:

```
addSbtPlugin("com.typesafe.akka" % "akka-sbt-plugin" % "2.2.5")
```

Make sure that you have a `project/build.properties` file:

```
sbt.version=0.12.4
```

Then you add it to the settings of your `project/Build.scala`. It is also important that you add the `akka-kernel` dependency. This is an example of a complete sbt build file:

```
import sbt._
import Keys._
import akka.sbt.AkkaKernelPlugin
import akka.sbt.AkkaKernelPlugin.{ Dist, outputDirectory, distJvmOptions}

object HelloKernelBuild extends Build {
  val Organization = "akka.sample"
  val Version      = "2.2.5"
  val ScalaVersion = "2.10.2"

  lazy val HelloKernel = Project(
    id = "hello-kernel",
    base = file("."),
    settings = defaultSettings ++ AkkaKernelPlugin.distSettings ++ Seq(
      libraryDependencies += Dependencies.helloKernel,
      distJvmOptions in Dist := "-Xms256M -Xmx1024M",
      outputDirectory in Dist := file("target/hello-dist")
    )
  )

  lazy val buildSettings = Defaults.defaultSettings ++ Seq(
    organization := Organization,
    version      := Version,
    scalaVersion := ScalaVersion,
    crossPaths  := false,
    organizationName := "Typesafe Inc.",
    organizationHomepage := Some(url("http://www.typesafe.com"))
  )

  lazy val defaultSettings = buildSettings ++ Seq(
    // compile options
    scalacOptions += Seq("-encoding", "UTF-8", "-deprecation", "-unchecked"),
    javacOptions  += Seq("-Xlint:unchecked", "-Xlint:deprecation")
  )
}

object Dependencies {
  import Dependency._

  val helloKernel = Seq(
    akkaKernel, akkaSlf4j, logback
  )
}

object Dependency {
  // Versions
  object V {
```

```
val Akka      = "2.2.5"
}

val akkaKernel = "com.typesafe.akka" %% "akka-kernel" % V.Akka
val akkaSlf4j  = "com.typesafe.akka" %% "akka-slf4j"  % V.Akka
val logback    = "ch.qos.logback"    % "logback-classic" % "1.0.0"
}
```

Run the plugin with sbt:

```
> dist
> dist:clean
```

There are several settings that can be defined:

- `outputDirectory` - destination directory of the package, default `target/dist`
- `distJvmOptions` - JVM parameters to be used in the start script
- `configSourceDirs` - Configuration files are copied from these directories, default `src/config`, `src/main/config`, `src/main/resources`
- `distMainClass` - Kernel main class to use in start script
- `libFilter` - Filter of dependency jar files
- `additionalLibs` - Additional dependency jar files

HOWTO: COMMON PATTERNS

This section lists common actor patterns which have been found to be useful, elegant or instructive. Anything is welcome, example topics being message routing strategies, supervision patterns, restart handling, etc. As a special bonus, additions to this section are marked with the contributor's name, and it would be nice if every Akka user who finds a recurring pattern in his or her code could share it for the profit of all. Where applicable it might also make sense to add to the `akka.pattern` package for creating an [OTP-like library](#).

You might find some of the patterns described in the Scala chapter of *howto-scala* useful even though the example code is written in Scala.

7.1 Scheduling Periodic Messages

This pattern describes how to schedule periodic messages to yourself in two different ways.

The first way is to set up periodic message scheduling in the constructor of the actor, and cancel that scheduled sending in `postStop` or else we might have multiple registered message sends to the same actor.

Note: With this approach the scheduled periodic message send will be restarted with the actor on restarts. This also means that the time period that elapses between two tick messages during a restart may drift off based on when you restart the scheduled message sends relative to the time that the last message was sent, and how long the initial delay is. Worst case scenario is `interval` plus `initialDelay`.

```
public class ScheduleInConstructor extends UntypedActor {

    private final Cancellable tick = getContext().system().scheduler().schedule(
        Duration.create(500, TimeUnit.MILLISECONDS),
        Duration.create(1000, TimeUnit.MILLISECONDS),
        getSelf(), "tick", getContext().dispatcher(), null);

    @Override
    public void postStop() {
        tick.cancel();
    }

    @Override
    public void onReceive(Object message) throws Exception {
        if (message.equals("tick")) {
            // do something useful here
        }
        else {
            unhandled(message);
        }
    }
}
```

The second variant sets up an initial one shot message send in the `preStart` method of the actor, and then the actor when it receives this message sets up a new one shot message send. You also have to override

`postRestart` so we don't call `preStart` and schedule the initial message send again.

Note: With this approach we won't fill up the mailbox with tick messages if the actor is under pressure, but only schedule a new tick message when we have seen the previous one.

```
public class ScheduleInReceive extends UntypedActor {

    @Override
    public void preStart() {
        getContext().system().scheduler().scheduleOnce(
            Duration.create(500, TimeUnit.MILLISECONDS),
            getSelf(), "tick", getContext().dispatcher(), null);
    }

    // override postRestart so we don't call preStart and schedule a new message
    @Override
    public void postRestart(Throwable reason) {
    }

    @Override
    public void onReceive(Object message) throws Exception {
        if (message.equals("tick")) {
            // send another periodic tick after the specified delay
            getContext().system().scheduler().scheduleOnce(
                Duration.create(1000, TimeUnit.MILLISECONDS),
                getSelf(), "tick", getContext().dispatcher(), null);
            // do something useful here
        }
        else {
            unhandled(message);
        }
    }
}
```

7.2 Single-Use Actor Trees with High-Level Error Reporting

Contributed by: Rick Latrine

A nice way to enter the actor world from java is the use of `Patterns.ask()`. This method starts a temporary actor to forward the message and collect the result from the actor to be “asked”. In case of errors within the asked actor the default supervision handling will take over. The caller of `Patterns.ask()` will *not* be notified.

If that caller is interested in such an exception, he must make sure that the asked actor replies with `Status.Failure(Throwable)`. Behind the asked actor a complex actor hierarchy might be spawned to accomplish asynchronous work. Then supervision is the established way to control error handling.

Unfortunately the asked actor must know about supervision and must catch the exceptions. Such an actor is unlikely to be reused in a different actor hierarchy and contains crippled try/catch blocks.

This pattern provides a way to encapsulate supervision and error propagation to the temporary actor. Finally the promise returned by `Patterns.ask()` is fulfilled as a failure, including the exception.

Let's have a look at the example code:

```
package docs.pattern;

import java.util.concurrent.TimeoutException;

import scala.concurrent.Future;
import scala.concurrent.duration.Duration;
```

```

import akka.actor.Actor;
import akka.actor.ActorKilledException;
import akka.actor.ActorRef;
import akka.actor.ActorRefFactory;
import akka.actor.Cancellable;
import akka.actor.OneForOneStrategy;
import akka.actor.Props;
import akka.actor.Scheduler;
import akka.actor.Status;
import akka.actor.SupervisorStrategy;
import akka.actor.SupervisorStrategy.Directive;
import akka.actor.Terminated;
import akka.actor.UntypedActor;
import akka.japi.Function;
import akka.pattern.Patterns;
import akka.util.Timeout;

public class SupervisedAsk {

    private static class AskParam {
        Props props;
        Object message;
        Timeout timeout;

        AskParam(Props props, Object message, Timeout timeout) {
            this.props = props;
            this.message = message;
            this.timeout = timeout;
        }
    }

    private static class AskTimeout {
    }

    public static class AskSupervisorCreator extends UntypedActor {

        @Override
        public void onReceive(Object message) throws Exception {
            if (message instanceof AskParam) {
                ActorRef supervisor = getContext().actorOf(
                    Props.create(AskSupervisor.class));
                supervisor.forward(message, getContext());
            } else {
                unhandled(message);
            }
        }
    }

    public static class AskSupervisor extends UntypedActor {
        private ActorRef targetActor;
        private ActorRef caller;
        private AskParam askParam;
        private Cancellable timeoutMessage;

        @Override
        public SupervisorStrategy supervisorStrategy() {
            return new OneForOneStrategy(0, Duration.Zero(),
                new Function<Throwable, Directive>() {
                    public Directive apply(Throwable cause) {
                        caller.tell(new Status.Failure(cause), self());
                        return SupervisorStrategy.stop();
                    }
                }
            );
        }
    }
}

```

```

}

@Override
public void onReceive(Object message) throws Exception {
    if (message instanceof AskParam) {
        askParam = (AskParam) message;
        caller = getSender();
        targetActor = getContext().actorOf(askParam.props);
        getContext().watch(targetActor);
        targetActor.forward(askParam.message, getContext());
        Scheduler scheduler = getContext().system().scheduler();
        timeoutMessage = scheduler.scheduleOnce(askParam.timeout.duration(),
            self(), new AskTimeout(), context().dispatcher(), null);
    } else if (message instanceof Terminated) {
        Throwable ex = new ActorKilledException("Target actor terminated.");
        caller.tell(new Status.Failure(ex), self());
        timeoutMessage.cancel();
        getContext().stop(self());
    } else if (message instanceof AskTimeout) {
        Throwable ex = new TimeoutException("Target actor timed out after "
            + askParam.timeout.toString());
        caller.tell(new Status.Failure(ex), self());
        getContext().stop(self());
    } else
        unhandled(message);
}
}

public static Future<Object> askOf(ActorRef supervisorCreator, Props props,
    Object message, Timeout timeout) {
    AskParam param = new AskParam(props, message, timeout);
    return Patterns.ask(supervisorCreator, param, timeout);
}

synchronized public static ActorRef createSupervisorCreator(
    ActorRefFactory factory) {
    return factory.actorOf(Props.create(AskSupervisorCreator.class));
}
}
}

```

In the `askOf` method the `SupervisorCreator` is sent the user message. The `SupervisorCreator` creates a `SupervisorActor` and forwards the message. This prevents the actor system from overloading due to actor creations. The `SupervisorActor` is responsible to create the user actor, forwards the message, handles actor termination and supervision. Additionally the `SupervisorActor` stops the user actor if execution time expired.

In case of an exception the supervisor tells the temporary actor which exception was thrown. Afterwards the actor hierarchy is stopped.

Finally we are able to execute an actor and receive the results or exceptions.

```

package docs.pattern;

import scala.concurrent.Await;
import scala.concurrent.Future;
import akka.actor.ActorRef;
import akka.actor.ActorRefFactory;
import akka.actor.Props;
import akka.actor.UntypedActor;
import akka.util.Timeout;

public class SupervisedAskSpec {

    public Object execute(Class<? extends UntypedActor> someActor,

```

```
Object message, Timeout timeout, ActorRefFactory actorSystem)
throws Exception {
// example usage
try {
  ActorRef supervisorCreator = SupervisedAsk
    .createSupervisorCreator(actorSystem);
  Future<Object> finished = SupervisedAsk.askOf(supervisorCreator,
    Props.create(someActor), message, timeout);
  return Await.result(finished, timeout.duration());
} catch (Exception e) {
  // exception propagated by supervision
  throw e;
}
}
```

7.3 Template Pattern

Contributed by: N. N.

This is an especially nice pattern, since it does even come with some empty example code:

```
class JavaTemplate {
  public JavaTemplate() {
    System.out.println("Hello, Template!");
  }
  // uninteresting stuff ...
}
```

Note: Spread the word: this is the easiest way to get famous!

Please keep this pattern at the end of this file.

EXPERIMENTAL MODULES

The following modules of Akka are marked as experimental, which means that they are in early access mode, which also means that they are not covered by commercial support. The purpose of releasing them early, as experimental, is to make them easily available and improve based on feedback, or even discover that the module wasn't useful.

An experimental module doesn't have to obey the rule of staying binary compatible between micro releases. Breaking API changes may be introduced in minor releases without notice as we refine and simplify based on your feedback. An experimental module may be dropped in minor releases without prior deprecation.

8.1 Multi Node Testing

Note: This module is *experimental*. This document describes how to use the features implemented so far. More features are coming in Akka Coltrane. Track progress of the Coltrane milestone in [Assembla](#).

8.1.1 Multi Node Testing Concepts

When we talk about multi node testing in Akka we mean the process of running coordinated tests on multiple actor systems in different JVMs. The multi node testing kit consist of three main parts.


- [The Test Conductor](#). that coordinates and controls the nodes under test.
- [The Multi Node Spec](#). that is a convenience wrapper for starting the `TestConductor` and letting all nodes connect to it.
- [The SbtMultiJvm Plugin](#). that starts tests in multiple JVMs possibly on multiple machines.

8.1.2 The Test Conductor

The basis for the multi node testing is the `TestConductor`. It is an Akka Extension that plugs in to the network stack and it is used to coordinate the nodes participating in the test and provides several features including:

- **Node Address Lookup:** Finding out the full path to another test node (No need to share configuration between test nodes)
- **Node Barrier Coordination:** Waiting for other nodes at named barriers.
- **Network Failure Injection:** Throttling traffic, dropping packets, unplugging and plugging nodes back in.

This is a schematic overview of the test conductor.

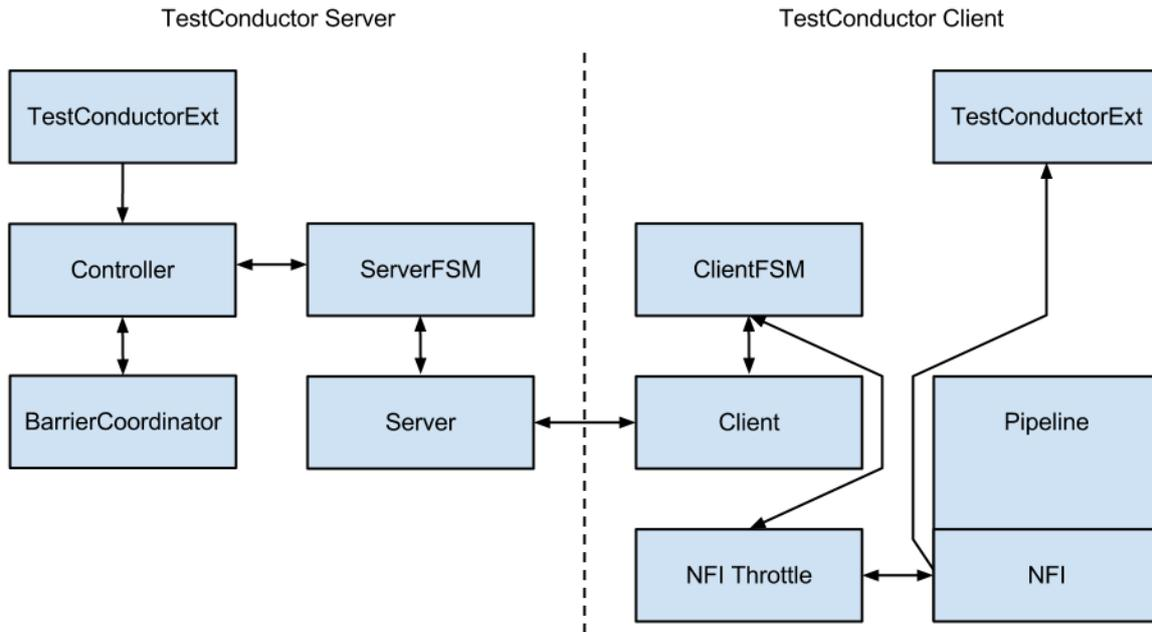

The test conductor server is responsible for coordinating barriers and sending commands to the test conductor clients that act upon them, e.g. throttling network traffic to/from another client. More information on the possible operations is available in the `akka.remote.testconductor.Conductor` API documentation.

8.1.3 The Multi Node Spec

The Multi Node Spec consists of two parts. The `MultiNodeConfig` that is responsible for common configuration and enumerating and naming the nodes under test. The `MultiNodeSpec` that contains a number of convenience functions for making the test nodes interact with each other. More information on the possible operations is available in the `akka.remote.testkit.MultiNodeSpec` API documentation.

The setup of the `MultiNodeSpec` is configured through java system properties that you set on all JVMs that's going to run a node under test. These can easily be set on the JVM command line with `-Dproperty=value`.

These are the available properties:

- `multinode.max-nodes`
The maximum number of nodes that a test can have.
- `multinode.host`
The host name or IP for this node. Must be resolvable using `InetAddress.getByName`.
- `multinode.port`
The port number for this node. Defaults to 0 which will use a random port.
- `multinode.server-host`
The host name or IP for the server node. Must be resolvable using `InetAddress.getByName`.
- `multinode.server-port`
The port number for the server node. Defaults to 4711.
- `multinode.index`
The index of this node in the sequence of roles defined for the test. The index 0 is special and that machine will be the server. All failure injection and throttling must be done from this node.

8.1.4 The SbtMultiJvm Plugin

The *SbtMultiJvm Plugin* has been updated to be able to run multi node tests, by automatically generating the relevant `multinode.*` properties. This means that you can easily run multi node tests on a single machine without any special configuration by just running them as normal multi-jvm tests. These tests can then be run distributed over multiple machines without any changes simply by using the multi-node additions to the plugin.

Multi Node Specific Additions

The plugin also has a number of new `multi-node-*` sbt tasks and settings to support running tests on multiple machines. The necessary test classes and dependencies are packaged for distribution to other machines with [SbtAssembly](#) into a jar file with a name on the format `<projectName>_<scalaVersion>-<projectVersion>-multi-jvm-assembly.jar`

Note: To be able to distribute and kick off the tests on multiple machines, it is assumed that both host and target systems are POSIX like systems with `ssh` and `rsync` available.

These are the available sbt multi-node settings:

- `multiNodeHosts`
A sequence of hosts to use for running the test, on the form `user@host:java` where `host` is the only required part. Will override settings from file.
- `multiNodeHostsFileName`
A file to use for reading in the hosts to use for running the test. One per line on the same format as above. Defaults to `multi-node-test.hosts` in the base project directory.
- `multiNodeTargetDirName`
A name for the directory on the target machine, where to copy the jar file. Defaults to `multi-node-test` in the base directory of the ssh user used to rsync the jar file.
- `multiNodeJavaName`
The name of the default Java executable on the target machines. Defaults to `java`.

Here are some examples of how you define hosts:

- `localhost`
The current user on localhost using the default java.
- `user1@host1`
User `user1` on host `host1` with the default java.
- `user2@host2:/usr/lib/jvm/java-7-openjdk-amd64/bin/java`
User `user2` on host `host2` using java 7.
- `host3:/usr/lib/jvm/java-6-openjdk-amd64/bin/java`
The current user on host `host3` using java 6.

Running the Multi Node Tests

To run all the multi node test in multi-node mode (i.e. distributing the jar files and kicking off the tests remotely) from inside sbt, use the `multi-node-test` task:

```
multi-node-test
```

To run all of them in multi-jvm mode (i.e. all JVMs on the local machine) do:

```
multi-jvm:test
```

To run individual tests use the `multi-node-test-only` task:

```
multi-node-test-only your.MultiNodeTest
```

To run individual tests in the `multi-jvm` mode do:

```
multi-jvm:test-only your.MultiNodeTest
```

More than one test name can be listed to run multiple specific tests. Tab completion in `sbt` makes it easy to complete the test names.

8.1.5 Preparing Your Project for Multi Node Testing

The multi node testing kit is a separate jar file. Make sure that you have the following dependency in your project:

```
"com.typesafe.akka" %% "akka-multi-node-testkit" % "2.2.5"
```

If you are using the latest nightly build you should pick a timestamped Akka version from http://repo.typesafe.com/typesafe/snapshots/com/typesafe/akka/akka-multi-node-testkit_2.10/. We recommend against using `SNAPSHOT` in order to obtain stable builds.

8.1.6 A Multi Node Testing Example

First we need some scaffolding to hook up the `MultiNodeSpec` with your favorite test framework. Lets define a trait `STMultiNodeSpec` that uses `ScalaTest` to start and stop `MultiNodeSpec`.

```
package sample.multinode

import org.scalatest.{ BeforeAndAfterAll, WordSpec }
import org.scalatest.matchers.MustMatchers
import akka.remote.testkit.MultiNodeSpecCallbacks

/**
 * Hooks up MultiNodeSpec with ScalaTest
 */
trait STMultiNodeSpec extends MultiNodeSpecCallbacks
  with WordSpec with MustMatchers with BeforeAndAfterAll {

  override def beforeAll() = multiNodeSpecBeforeAll()

  override def afterAll() = multiNodeSpecAfterAll()
}
```

Then we need to define a configuration. Lets use two nodes `"node1"` and `"node2"` and call it `MultiNodeSampleConfig`.

```
package sample.multinode
import akka.remote.testkit.MultiNodeConfig

object MultiNodeSampleConfig extends MultiNodeConfig {
  val node1 = role("node1")
  val node2 = role("node2")
}
```

And then finally to the node test code. That starts the two nodes, and demonstrates a barrier, and a remote actor message send/receive.

```
package sample.multinode
import akka.remote.testkit.MultiNodeSpec
```

```

import akka.testkit.ImplicitSender
import akka.actor.{Props, Actor}

class MultiNodeSampleSpecMultiJvmNode1 extends MultiNodeSample
class MultiNodeSampleSpecMultiJvmNode2 extends MultiNodeSample

class MultiNodeSample extends MultiNodeSpec(MultiNodeSampleConfig)
  with STMultiNodeSpec with ImplicitSender {

  import MultiNodeSampleConfig._

  def initialParticipants = roles.size

  "A MultiNodeSample" must {

    "wait for all nodes to enter a barrier" in {
      enterBarrier("startup")
    }

    "send to and receive from a remote node" in {
      runOn(node1) {
        enterBarrier("deployed")
        val ponger = system.actorFor(node(node2) / "user" / "ponger")
        ponger ! "ping"
        expectMsg("pong")
      }

      runOn(node2) {
        system.actorOf(Props(new Actor {
          def receive = {
            case "ping" => sender ! "pong"
          }
        })), "ponger")
        enterBarrier("deployed")
      }

      enterBarrier("finished")
    }
  }
}

```

8.1.7 Things to Keep in Mind

There are a couple of things to keep in mind when writing multi node tests or else your tests might behave in surprising ways.

- Don't issue a shutdown of the first node. The first node is the controller and if it shuts down your test will break.
- To be able to use `blackhole`, `passThrough`, and `throttle` you must activate the failure injector and throttler transport adapters by specifying `testTransport(on = true)` in your `MultiNodeConfig`.
- Throttling, shutdown and other failure injections can only be done from the first node, which again is the controller.
- Don't ask for the address of a node using `node(address)` after the node has been shut down. Grab the address before shutting down the node.
- Don't use `MultiNodeSpec` methods like `address lookup`, `barrier entry` et.c. from other threads than the main test thread. This also means that you shouldn't use them from inside an actor, a future, or a scheduled task.

Another reason for marking a module as experimental is that it's too early to tell if the module has a maintainer that can take the responsibility of the module over time. These modules live in the `akka-contrib` subproject:

8.2 External Contributions

This subproject provides a home to modules contributed by external developers which may or may not move into the officially supported code base over time. The conditions under which this transition can occur include:

- there must be enough interest in the module to warrant inclusion in the standard distribution,
- the module must be actively maintained and
- code quality must be good enough to allow efficient maintenance by the Akka core development team

If a contributions turns out to not “take off” it may be removed again at a later time.

8.2.1 Caveat Emptor

A module in this subproject doesn’t have to obey the rule of staying binary compatible between minor releases. Breaking API changes may be introduced in minor releases without notice as we refine and simplify based on your feedback. A module may be dropped in any release without prior deprecation. The Typesafe subscription does not cover support for these modules.

8.2.2 The Current List of Modules

Reliable Proxy Pattern

Looking at *Message Delivery Guarantees* one might come to the conclusion that Akka actors are made for blue-sky scenarios: sending messages is the only way for actors to communicate, and then that is not even guaranteed to work. Is the whole paradigm built on sand? Of course the answer is an emphatic “No!”.

A local message send—within the same JVM instance—is not likely to fail, and if it does the reason was one of


- it was meant to fail (due to consciously choosing a bounded mailbox, which upon overflow will have to drop messages)
- or it failed due to a catastrophic VM error, e.g. an `OutOfMemoryError`, a memory access violation (“segmentation fault”, GPF, etc.), JVM bug—or someone calling `System.exit()`.

In all of these cases, the actor was very likely not in a position to process the message anyway, so this part of the non-guarantee is not problematic.

It is a lot more likely for an unintended message delivery failure to occur when a message send crosses JVM boundaries, i.e. an intermediate unreliable network is involved. If someone unplugs an ethernet cable, or a power failure shuts down a router, messages will be lost while the actors would be able to process them just fine.

Note: This does not mean that message send semantics are different between local and remote operations, it just means that in practice there is a difference between how good the “best effort” is.

Introducing the Reliable Proxy

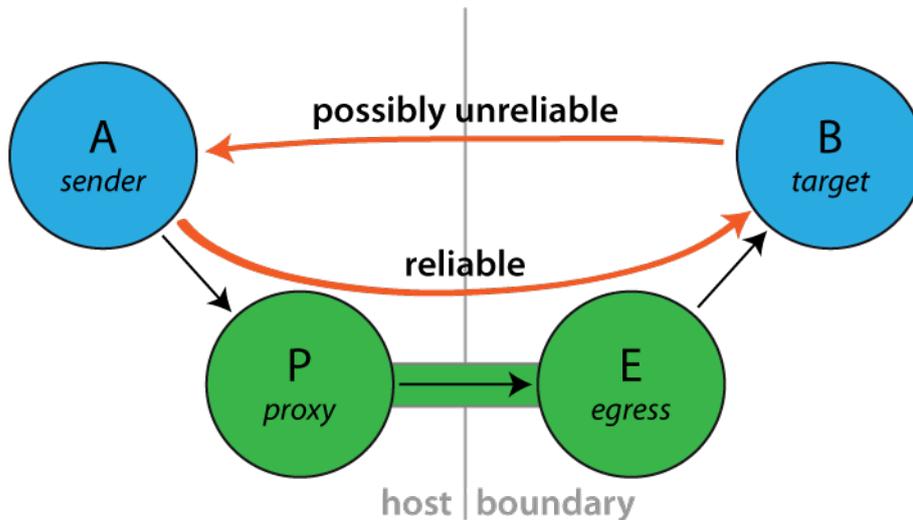

To bridge the disparity between “local” and “remote” sends is the goal of this pattern. When sending from A to B must be as reliable as in-JVM, regardless of the deployment, then you can interject a reliable tunnel and send through that instead. The tunnel consists of two end-points, where the ingress point P (the “proxy”) is a child of A and the egress point E is a child of P, deployed onto the same network node where B lives. Messages sent to P will be wrapped in an envelope, tagged with a sequence number and sent to E, who verifies that the received envelope has the right sequence number (the next expected one) and forwards the contained message to B. When B receives this message, the `sender` will be a reference to the sender of the original message to P. Reliability is added by E replying to orderly received messages with an ACK, so that P can tick those messages off its resend list. If ACKs do not come in a timely fashion, P will try to resend until successful.

Exactly what does it guarantee?

Sending via a `ReliableProxy` makes the message send exactly as reliable as if the represented target were to live within the same JVM, provided that the remote actor system does not terminate. In effect, both ends (i.e. JVM and actor system) must be considered as one when evaluating the reliability of this communication channel. The benefit is that the network in-between is taken out of that equation.

When the target actor terminates, the proxy will terminate as well (on the terms of *Lifecycle Monitoring aka DeathWatch / deathwatch-scala*).

How to use it

Since this implementation does not offer much in the way of configuration, simply instantiate a proxy wrapping some target reference. From Java it looks like this:

```
import akka.contrib.pattern.ReliableProxy;

final ActorRef proxy = getContext().actorOf(
    Props.create(ReliableProxy.class, target, Duration.create(100, "millis")));

public void onReceive(Object msg) {
    if ("hello".equals(msg)) {
        proxy.tell("world!", getSelf());
    }
}
```

And from Scala like this:

```
import akka.contrib.pattern.ReliableProxy

system.actorSelection(node(remote) / "user" / "echo") ! Identify("echo")
target = expectMsgType[ActorIdentity].ref.get
proxy = system.actorOf(Props(classOf[ReliableProxy], target, 100.millis), "proxy")
proxy ! "hello"
```

Since the `ReliableProxy` actor is an *fsm-scala*, it also offers the capability to subscribe to state transitions. If you need to know when all enqueued messages have been received by the remote end-point (and consequently been forwarded to the target), you can subscribe to the FSM notifications and observe a transition from state `ReliableProxy.Active` to state `ReliableProxy.Idle`.

```
final ActorRef proxy = getContext().actorOf(Props.create(ReliableProxy.class, target,
    Duration.create(100, "millis")));
ActorRef client = null;
{
    proxy.tell(new FSM.SubscribeTransitionCallBack(getSelf()), getSelf());
}

public void onReceive(Object msg) {
    if ("hello".equals(msg)) {
        proxy.tell("world!", getSelf());
        client = getSender();
    } else if (msg instanceof FSM.CurrentState<?>) {
        // get initial state
    } else if (msg instanceof FSM.Transition<?>) {
        @SuppressWarnings("unchecked")
        final FSM.Transition<ReliableProxy.State> transition =
            (FSM.Transition<ReliableProxy.State>) msg;
        assert transition.fsmRef().equals(proxy);
        if (transition.to().equals(ReliableProxy.idle())) {
            client.tell("done", getSelf());
        }
    }
}
```

From Scala it would look like so:

```
val proxy = context.actorOf(Props(classOf[ReliableProxy], target, 100.millis))
proxy ! FSM.SubscribeTransitionCallBack(self)

var client: ActorRef = _

def receive = {
    case "go" => proxy ! 42; client = sender
    case FSM.CurrentState(`proxy`, initial) =>
    case FSM.Transition(`proxy`, from, to) => if (to == ReliableProxy.Idle)
        client ! "done"
}
```

The Actor Contract

Message it Processes

- `FSM.SubscribeTransitionCallBack` and `FSM.UnsubscribeTransitionCallBack`, see *fsm-scala*
- internal messages declared within `ReliableProxy`, *not for external use*
- any other message is transferred through the reliable tunnel and forwarded to the designated target actor

Messages it Sends

- `FSM.CurrentState` and `FSM.Transition`, see *fsm-scala*

Exceptions it Escalates

- no specific exception types
- any exception encountered by either the local or remote end-point are escalated (only fatal VM errors)

Arguments it Takes

- *target* is the `ActorRef` to which the tunnel shall reliably deliver messages, B in the above illustration.
- *retryAfter* is the timeout for receiving ACK messages from the remote end-point; once it fires, all outstanding message sends will be retried.

Throttling Actor Messages

Introduction

Suppose you are writing an application that makes HTTP requests to an external web service and that this web service has a restriction in place: you may not make more than 10 requests in 1 minute. You will get blocked or need to pay if you don't stay under this limit. In such a scenario you will want to employ a *message throttler*.

This extension module provides a simple implementation of a throttling actor, the `TimerBasedThrottler`.

How to use it

You can use a `TimerBasedThrottler` as follows. From Java it looks like this:

```
// A simple actor that prints whatever it receives
ActorRef printer = system.actorOf(Props.create(Printer.class));
// The throttler for this example, setting the rate
ActorRef throttler = system.actorOf(Props.create(TimerBasedThrottler.class,
    new Throttler.Rate(3, Duration.create(1, TimeUnit.SECONDS))));
// Set the target
throttler.tell(new Throttler.SetTarget(printer), null);
// These three messages will be sent to the target immediately
throttler.tell("1", null);
throttler.tell("2", null);
throttler.tell("3", null);
// These two will wait until a second has passed
throttler.tell("4", null);
throttler.tell("5", null);

//A simple actor that prints whatever it receives
public class Printer extends UntypedActor {
    @Override
    public void onReceive(Object msg) {
        System.out.println(msg);
    }
}
```

And from Scala like this:

```
// A simple actor that prints whatever it receives
val printer = system.actorOf(Props(new Actor {
    def receive = {
        case x => println(x)
    }
}))
```

```
// The throttler for this example, setting the rate
val throttler = system.actorOf(Props(classOf[TimerBasedThrottler],
  3 msgsPer 1.second))
// Set the target
throttler ! SetTarget(Some(printer))
// These three messages will be sent to the target immediately
throttler ! "1"
throttler ! "2"
throttler ! "3"
// These two will wait until a second has passed
throttler ! "4"
throttler ! "5"
```

Please refer to the JavaDoc/ScalaDoc documentation for the details.


The guarantees

`TimerBasedThrottler` uses a timer internally. When the throttler's rate is 3 msg/s, for example, the throttler will start a timer that triggers every second and each time will give the throttler exactly three "vouchers"; each voucher gives the throttler a right to deliver a message. In this way, at most 3 messages will be sent out by the throttler in each interval.

It should be noted that such timer-based throttlers provide relatively **weak guarantees**:

- Only *start times* are taken into account. This may be a problem if, for example, the throttler is used to throttle requests to an external web service. If a web request takes very long on the server then the rate *observed on the server* may be higher.
- A timer-based throttler only makes guarantees for the intervals of its own timer. In our example, no more than 3 messages are delivered within such intervals. Other intervals on the timeline, however, may contain more calls.

The two cases are illustrated in the two figures below, each showing a timeline and three intervals of the timer. The message delivery times chosen by the throttler are indicated by dots, and as you can see, each interval contains at most 3 points, so the throttler works correctly. Still, there is in each example an interval (the red one) that is problematic. In the first scenario, this is because the delivery times are merely the start times of longer requests (indicated by the four bars above the timeline that start at the dots), so that the server observes four requests during the red interval. In the second scenario, the messages are centered around one of the points in time where the timer triggers, causing the red interval to contain too many messages.

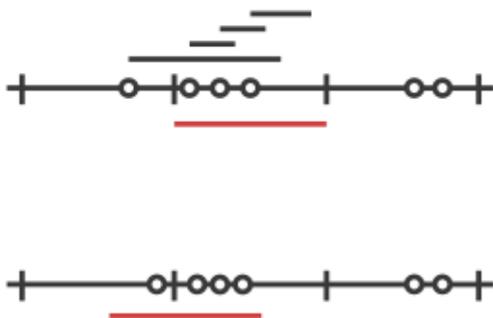

For some application scenarios, the guarantees provided by a timer-based throttler might be too weak. Charles Cordingley's [blog post](#) discusses a throttler with stronger guarantees (it solves problem 2 from above). Future versions of this module may feature throttlers with better guarantees.

Java Logging (JUL)

This extension module provides a logging backend which uses the *java.util.logging* (j.u.l) API to do the endpoint logging for *akka.event.Logging*.

Provided with this module is an implementation of *akka.event.LoggingAdapter* which is independent of any *ActorSystem* being in place. This means that j.u.l can be used as the backend, via the Akka Logging API, for both Actor and non-Actor codebases.

To enable j.u.l as the *akka.event.Logging* backend, use the following Akka config:

```
loggers = ["akka.contrib.jul.JavaLogger"]
```

To access the *akka.event.Logging* API from non-Actor code, mix in *akka.contrib.jul.JavaLogging*.

This module is preferred over SLF4J with its JDK14 backend, due to integration issues resulting in the incorrect handling of *threadId*, *className* and *methodName*.

This extension module was contributed by Sam Halliday.

Mailbox with Explicit Acknowledgement

When an Akka actor is processing a message and an exception occurs, the normal behavior is for the actor to drop that message, and then continue with the next message after it has been restarted. This is in some cases not the desired solution, e.g. when using failure and supervision to manage a connection to an unreliable resource; the actor could after the restart go into a buffering mode (i.e. change its behavior) and retry the real processing later, when the unreliable resource is back online.

One way to do this is by sending all messages through the supervisor and buffering them there, acknowledging successful processing in the child; another way is to build an explicit acknowledgement mechanism into the mailbox. The idea with the latter is that a message is reprocessed in case of failure until the mailbox is told that processing was successful.

The pattern is implemented [here](#). A demonstration of how to use it (although for brevity not a perfect example) is the following:

```
class MyActor extends Actor {
  def receive = {
    case msg =>
      println(msg)
      doStuff(msg) // may fail
      PeekMailboxExtension.ack()
  }

  // business logic elided ...
}

object MyApp extends App {
  val system = ActorSystem("MySystem", ConfigFactory.parseString("""
    peek-dispatcher {
      mailbox-type = "akka.contrib.mailbox.PeekMailboxType"
      max-tries = 2
    }
  """))

  val myActor = system.actorOf(Props[MyActor].withDispatcher("peek-dispatcher"),
    name = "myActor")

  myActor ! "Hello"
  myActor ! "World"
  myActor ! PoisonPill
}
```

Running this application (try it in the Akka sources by saying `sbt akka-contrib/test:run`) may produce the following output (note the processing of “World” on lines 2 and 16):

```
Hello
World
[ERROR] [12/17/2012 16:28:36.581] [MySystem-peek-dispatcher-5] [akka://MySystem/user/myActor] DONTW
java.lang.Exception: DONTWANNA
    at akka.contrib.mailbox.MyActor.doStuff(PeekMailbox.scala:105)
    at akka.contrib.mailbox.MyActor$$anonfun$receive$1.applyOrElse(PeekMailbox.scala:98)
    at akka.actor.ActorCell.receiveMessage(ActorCell.scala:425)
    at akka.actor.ActorCell.invoke(ActorCell.scala:386)
    at akka.dispatch.Mailbox.processMailbox(Mailbox.scala:230)
    at akka.dispatch.Mailbox.run(Mailbox.scala:212)
    at akka.dispatch.ForkJoinExecutorConfigurator$MailboxExecutionContext.exec(AbstractDispatcher.s
    at scala.concurrent.forkjoin.ForkJoinTask.doExec(ForkJoinTask.java:262)
    at scala.concurrent.forkjoin.ForkJoinPool$WorkQueue.runTask(ForkJoinPool.java:975)
    at scala.concurrent.forkjoin.ForkJoinPool.runWorker(ForkJoinPool.java:1478)
    at scala.concurrent.forkjoin.ForkJoinWorkerThread.run(ForkJoinWorkerThread.java:104)
World
```

Normally one would want to make processing idempotent (i.e. it does not matter if a message is processed twice) or `context.become` a different behavior upon restart; the above example included the `println(msg)` call just to demonstrate the re-processing.

Cluster Singleton Pattern

For some use cases it is convenient and sometimes also mandatory to ensure that you have exactly one actor of a certain type running somewhere in the cluster.

Some examples:

- single point of responsibility for certain cluster-wide consistent decisions, or coordination of actions across the cluster system
- single entry point to an external system
- single master, many workers
- centralized naming service, or routing logic

Using a singleton should not be the first design choice. It has several drawbacks, such as single-point of bottleneck. Single-point of failure is also a relevant concern, but for some cases this feature takes care of that by making sure that another singleton instance will eventually be started.

The cluster singleton pattern is implemented by `akka.contrib.pattern.ClusterSingletonManager`. It manages singleton actor instance among all cluster nodes or a group of nodes tagged with a specific role. `ClusterSingletonManager` is an actor that is supposed to be started on all nodes, or all nodes with specified role, in the cluster. The actual singleton actor is started by the `ClusterSingletonManager` on the oldest node by creating a child actor from supplied `Props`. `ClusterSingletonManager` makes sure that at most one singleton instance is running at any point in time.

The singleton actor is always running on the oldest member, which can be determined by `Member#isOlderThan`. This can change when removing members. A graceful hand over can normally be performed when current oldest node is leaving the cluster. Be aware that there is a short time period when there is no active singleton during the hand-over process.

The cluster failure detector will notice when oldest node becomes unreachable due to things like JVM crash, hard shut down, or network failure. Then a new oldest node will take over and a new singleton actor is created. For these failure scenarios there will not be a graceful hand-over, but more than one active singletons is prevented by all reasonable means. Some corner cases are eventually resolved by configurable timeouts.

You access the singleton actor with `actorSelection` using the names you have specified when creating the `ClusterSingletonManager`. You can subscribe to `akka.cluster.ClusterEvent.MemberEvent` and sort

the members by age (`Member#isOlderThan`) to keep track of oldest member. Alternatively the singleton actor may broadcast its existence when it is started.

An Example

Assume that we need one single entry point to an external system. An actor that receives messages from a JMS queue with the strict requirement that only one JMS consumer must exist to be make sure that the messages are processed in order. That is perhaps not how one would like to design things, but a typical real-world scenario when integrating with external systems.

On each node in the cluster you need to start the `ClusterSingletonManager` and supply the `Props` of the singleton actor, in this case the JMS queue consumer.

In Scala:

```
system.actorOf(ClusterSingletonManager.props(
  singletonProps = handOverData =>
    Props(classOf[Consumer], handOverData, queue, testActor),
  singletonName = "consumer",
  terminationMessage = End,
  role = Some("worker"),
  name = "singleton")
```

Here we limit the singleton to nodes tagged with the "worker" role, but all nodes, independent of role, can be used by specifying `None` as role parameter.

The corresponding Java API for the `singletonProps` function is `akka.contrib.pattern.ClusterSingletonPropsFactory`. The Java API takes a plain `String` for the role parameter and `null` means that all nodes, independent of role, are used.

In Java:

```
system.actorOf(
  ClusterSingletonManager.defaultProps("consumer", new End(), "worker",
    new ClusterSingletonPropsFactory() {
      @Override
      public Props create(Object handOverData) {
        return Props.create(Consumer.class, handOverData, queue, testActor);
      }
    }
  ), "singleton");
```

Note: The `singletonProps/singletonPropsFactory` is invoked when creating the singleton actor and it must not use members that are not thread safe, e.g. mutable state in enclosing actor.

Here we use an application specific `terminationMessage` to be able to close the resources before actually stopping the singleton actor. Note that `PoisonPill` is a perfectly fine `terminationMessage` if you only need to stop the actor.

Here is how the singleton actor handles the `terminationMessage` in this example.

```
case End =>
  queue ! UnregisterConsumer
case UnregistrationOk =>
  // reply to ClusterSingletonManager with hand over data,
  // which will be passed as parameter to new consumer singleton
  context.parent ! current
  context stop self
```

Note that you can send back current state to the `ClusterSingletonManager` before terminating. This message will be sent over to the `ClusterSingletonManager` at the new oldest node and it will be passed to the `singletonProps` factory when creating the new singleton instance.

With the names given above the path of singleton actor can be constructed by subscribing to MemberEvent cluster event and sort the members by age to keep track of oldest member.

In Scala:

```
class ConsumerProxy extends Actor {

  // subscribe to MemberEvent, re-subscribe when restart
  override def preStart(): Unit =
    Cluster(context.system).subscribe(self, classOf[MemberEvent])
  override def postStop(): Unit =
    Cluster(context.system).unsubscribe(self)

  val role = "worker"
  // sort by age, oldest first
  val ageOrdering = Ordering.fromLessThan[Member] { (a, b) => a.isOlderThan(b) }
  var membersByAge: immutable.SortedSet[Member] =
    immutable.SortedSet.empty(ageOrdering)

  def receive = {
    case state: CurrentClusterState =>
      membersByAge = immutable.SortedSet.empty(ageOrdering) ++ state.members.collect {
        case m if m.hasRole(role) => m
      }
    case MemberUp(m) => if (m.hasRole(role)) membersByAge += m
    case MemberRemoved(m, _) => if (m.hasRole(role)) membersByAge -= m
    case other => consumer foreach { _.tell(other, sender) }
  }

  def consumer: Option[ActorSelection] =
    membersByAge.headOption map (m => context.actorSelection(
      RootActorPath(m.address) / "user" / "singleton" / "consumer"))
}
```

In Java:

```
public class ConsumerProxy extends UntypedActor {

  final Cluster cluster = Cluster.get(getContext().system());

  final Comparator<Member> ageComparator = new Comparator<Member>() {
    public int compare(Member a, Member b) {
      if (a.isOlderThan(b))
        return -1;
      else if (b.isOlderThan(a))
        return 1;
      else
        return 0;
    }
  };
  final SortedSet<Member> membersByAge = new TreeSet<Member>(ageComparator);

  final String role = "worker";

  //subscribe to cluster changes
  @Override
  public void preStart() {
    cluster.subscribe(getSelf(), MemberEvent.class);
  }

  //re-subscribe when restart
  @Override
  public void postStop() {
    cluster.unsubscribe(getSelf());
  }
}
```

```

}

@Override
public void onReceive(Object message) {
    if (message instanceof CurrentClusterState) {
        CurrentClusterState state = (CurrentClusterState) message;
        List<Member> members = new ArrayList<Member>();
        for (Member m : state.getMembers()) {
            if (m.hasRole(role))
                members.add(m);
        }
        membersByAge.clear();
        membersByAge.addAll(members);
    } else if (message instanceof MemberUp) {
        Member m = ((MemberUp) message).member();
        if (m.hasRole(role))
            membersByAge.add(m);
    } else if (message instanceof MemberRemoved) {
        Member m = ((MemberUp) message).member();
        if (m.hasRole(role))
            membersByAge.remove(m);
    } else if (message instanceof MemberEvent) {
        // not interesting
    } else if (!membersByAge.isEmpty()) {
        currentMaster().tell(message, getSender());
    }
}

ActorSelection currentMaster() {
    return getContext().actorSelection(membersByAge.first().address() +
        "/user singleton/statsService");
}
}

```

The checks of `role` can be omitted if you don't limit the singleton to the group of members tagged with a specific role.

Note that the hand-over might still be in progress and the singleton actor might not be started yet when you receive the member event.

A nice alternative to the above proxy is to use *Distributed Publish Subscribe in Cluster*. Let the singleton actor register itself to the mediator with `DistributedPubSubMediator.Put` message when it is started. Send messages to the singleton actor via the mediator with `DistributedPubSubMediator.SendToAll`.

Note: The singleton pattern will be simplified, perhaps provided out-of-the-box, when the cluster handles automatic actor partitioning.

Distributed Publish Subscribe in Cluster

How do I send a message to an actor without knowing which node it is running on?

How do I send messages to all actors in the cluster that have registered interest in a named topic?

This pattern provides a mediator actor, `akka.contrib.pattern.DistributedPubSubMediator`, that manages a registry of actor references and replicates the entries to peer actors among all cluster nodes or a group of nodes tagged with a specific role.

The *DistributedPubSubMediator* is supposed to be started on all nodes, or all nodes with specified role, in the cluster. The mediator can be started with the `DistributedPubSubExtension` or as an ordinary actor.

Changes are only performed in the own part of the registry and those changes are versioned. Deltas are disseminated in a scalable way to other nodes with a gossip protocol. The registry is eventually consistent, i.e. changes are not immediately visible at other nodes, but typically they will be fully replicated to all other nodes after a few seconds.

You can send messages via the mediator on any node to registered actors on any other node. There is three modes of message delivery.

1. `DistributedPubSubMediator.Send`

The message will be delivered to one recipient with a matching path, if any such exists in the registry. If several entries match the path the message will be delivered to one random destination. The sender of the message can specify that local affinity is preferred, i.e. the message is sent to an actor in the same local actor system as the used mediator actor, if any such exists, otherwise random to any other matching entry. A typical usage of this mode is private chat to one other user in an instant messaging application. It can also be used for distributing tasks to workers, like a random router.

2. `DistributedPubSubMediator.SendToAll`

The message will be delivered to all recipients with a matching path. Actors with the same path, without address information, can be registered on different nodes. On each node there can only be one such actor, since the path is unique within one local actor system. Typical usage of this mode is to broadcast messages to all replicas with the same path, e.g. 3 actors on different nodes that all perform the same actions, for redundancy. You can also optionally specify a property (`allButSelf`) deciding if the message should be sent to a matching path on the self node or not.

3. `DistributedPubSubMediator.Publish`

Actors may be registered to a named topic instead of path. This enables many subscribers on each node. The message will be delivered to all subscribers of the topic. For efficiency the message is sent over the wire only once per node (that has a matching topic), and then delivered to all subscribers of the local topic representation. This is the true pub/sub mode. A typical usage of this mode is a chat room in an instant messaging application.

You register actors to the local mediator with `DistributedPubSubMediator.Put` or `DistributedPubSubMediator.Subscribe`. `Put` is used together with `Send` and `SendToAll` message delivery modes. The `ActorRef` in `Put` must belong to the same local actor system as the mediator. `Subscribe` is used together with `Publish`. Actors are automatically removed from the registry when they are terminated, or you can explicitly remove entries with `DistributedPubSubMediator.Remove` or `DistributedPubSubMediator.Unsubscribe`.

Successful `Subscribe` and `Unsubscribe` is acknowledged with `DistributedPubSubMediator.SubscribeAck` and `DistributedPubSubMediator.UnsubscribeAck` replies.

A Small Example in Java

A subscriber actor:

```
public class Subscriber extends UntypedActor {
    LoggingAdapter log = Logging.getLogger(getContext().system(), this);

    public Subscriber() {
        ActorRef mediator =
            DistributedPubSubExtension.get(getContext().system()).mediator();
        // subscribe to the topic named "content"
        mediator.tell(new DistributedPubSubMediator.Subscribe("content", getSelf()),
            getSelf());
    }

    public void onReceive(Object msg) {
        if (msg instanceof String)
```

```

    log.info("Got: {}", msg);
  else if (msg instanceof DistributedPubSubMediator.SubscribeAck)
    log.info("subscribing");
  else
    unhandled(msg);
}
}

```

Subscriber actors can be started on several nodes in the cluster, and all will receive messages published to the “content” topic.

```

system.actorOf(Props.create(Subscriber.class), "subscriber1");
//another node
system.actorOf(Props.create(Subscriber.class), "subscriber2");
system.actorOf(Props.create(Subscriber.class), "subscriber3");

```

A simple actor that publishes to this “content” topic:

```

public class Publisher extends UntypedActor {

  // activate the extension
  ActorRef mediator =
    DistributedPubSubExtension.get(getContext().system()).mediator();

  public void onReceive(Object msg) {
    if (msg instanceof String) {
      String in = (String) msg;
      String out = in.toUpperCase();
      mediator.tell(new DistributedPubSubMediator.Publish("content", out),
        getSelf());
    } else {
      unhandled(msg);
    }
  }
}

```

It can publish messages to the topic from anywhere in the cluster:

```

//somewhere else
ActorRef publisher = system.actorOf(Props.create(Publisher.class), "publisher");
// after a while the subscriptions are replicated
publisher.tell("hello", null);

```

A Small Example in Scala

A subscriber actor:

```

class Subscriber extends Actor with ActorLogging {
  import DistributedPubSubMediator.{ Subscribe, SubscribeAck }
  val mediator = DistributedPubSubExtension(context.system).mediator
  // subscribe to the topic named "content"
  mediator ! Subscribe("content", self)

  def receive = {
    case SubscribeAck(Subscribe("content", `self`)) =>
      context become ready
  }

  def ready: Actor.Receive = {
    case s: String =>
      log.info("Got {}", s)
  }
}

```

```
}
}
```

Subscriber actors can be started on several nodes in the cluster, and all will receive messages published to the “content” topic.

```
runOn(first) {
  system.actorOf(Props[Subscriber], "subscriber1")
}
runOn(second) {
  system.actorOf(Props[Subscriber], "subscriber2")
  system.actorOf(Props[Subscriber], "subscriber3")
}
```

A simple actor that publishes to this “content” topic:

```
class Publisher extends Actor {
  import DistributedPubSubMediator.Publish
  // activate the extension
  val mediator = DistributedPubSubExtension(context.system).mediator

  def receive = {
    case in: String =>
      val out = in.toUpperCase
      mediator ! Publish("content", out)
  }
}
```

It can publish messages to the topic from anywhere in the cluster:

```
runOn(third) {
  val publisher = system.actorOf(Props[Publisher], "publisher")
  later()
  // after a while the subscriptions are replicated
  publisher ! "hello"
}
```

DistributedPubSubExtension

In the example above the mediator is started and accessed with the `akka.contrib.pattern.DistributedPubSubExtension`. That is convenient and perfectly fine in most cases, but it can be good to know that it is possible to start the mediator actor as an ordinary actor and you can have several different mediators at the same time to be able to divide a large number of actors/topics to different mediators. For example you might want to use different cluster roles for different mediators.

The `DistributedPubSubExtension` can be configured with the following properties:

```
# Settings for the DistributedPubSubExtension
akka.contrib.cluster.pub-sub {
  # Actor name of the mediator actor, /user/distributedPubSubMediator
  name = distributedPubSubMediator

  # Start the mediator on members tagged with this role.
  # All members are used if undefined or empty.
  role = ""

  # How often the DistributedPubSubMediator should send out gossip information
  gossip-interval = 1s

  # Removed entries are pruned after this duration
  removed-time-to-live = 120s
}
```

It is recommended to load the extension when the actor system is started by defining it in `akka.extensions` configuration property. Otherwise it will be activated when first used and then it takes a while for it to be populated.

```
akka.extensions = ["akka.contrib.pattern.DistributedPubSubExtension"]
```

Cluster Client

An actor system that is not part of the cluster can communicate with actors somewhere in the cluster via this `ClusterClient`. The client can of course be part of another cluster. It only needs to know the location of one (or more) nodes to use as initial contact points. It will establish a connection to a `ClusterReceptionist` somewhere in the cluster. It will monitor the connection to the receptionist and establish a new connection if the link goes down. When looking for a new receptionist it uses fresh contact points retrieved from previous establishment, or periodically refreshed contacts, i.e. not necessarily the initial contact points. Also, note it's necessary to change `akka.actor.provider` from `akka.actor.LocalActorRefProvider` to `akka.remote.RemoteActorRefProvider` or `akka.cluster.ClusterActorRefProvider` when using the cluster client.

The receptionist is supposed to be started on all nodes, or all nodes with specified role, in the cluster. The receptionist can be started with the `ClusterReceptionistExtension` or as an ordinary actor.

You can send messages via the `ClusterClient` to any actor in the cluster that is registered in the `DistributedPubSubMediator` used by the `ClusterReceptionist`. The `ClusterReceptionistExtension` provides methods for registration of actors that should be reachable from the client. Messages are wrapped in `ClusterClient.Send`, `ClusterClient.SendToAll` or `ClusterClient.Publish`.

1. ClusterClient.Send

The message will be delivered to one recipient with a matching path, if any such exists. If several entries match the path the message will be delivered to one random destination. The sender of the message can specify that local affinity is preferred, i.e. the message is sent to an actor in the same local actor system as the used receptionist actor, if any such exists, otherwise random to any other matching entry.

2. ClusterClient.SendToAll

The message will be delivered to all recipients with a matching path.

3. ClusterClient.Publish

The message will be delivered to all recipients Actors that have been registered as subscribers to the named topic.

Response messages from the destination actor are tunneled via the receptionist to avoid inbound connections from other cluster nodes to the client, i.e. the `sender`, as seen by the destination actor, is not the client itself. The `sender` of the response messages, as seen by the client, is preserved as the original sender, so the client can choose to send subsequent messages directly to the actor in the cluster.

An Example

On the cluster nodes first start the receptionist. Note, it is recommended to load the extension when the actor system is started by defining it in the `akka.extensions` configuration property:

```
akka.extensions = ["akka.contrib.pattern.ClusterReceptionistExtension"]
```

Next, register the actors that should be available for the client.

```
runOn(host1) {
  val serviceA = system.actorOf(Props[Service], "serviceA")
  ClusterReceptionistExtension(system).registerService(serviceA)
}

runOn(host2, host3) {
  val serviceB = system.actorOf(Props[Service], "serviceB")
}
```

```
ClusterReceptionistExtension(system).registerService(serviceB)
}
```

On the client you create the `ClusterClient` actor and use it as a gateway for sending messages to the actors identified by their path (without address information) somewhere in the cluster.

```
runOn(client) {
  val c = system.actorOf(ClusterClient.props(initialContacts))
  c ! ClusterClient.Send("/user/serviceA", "hello", localAffinity = true)
  c ! ClusterClient.SendToAll("/user/serviceB", "hi")
}
```

The `initialContacts` parameter is a `Set [ActorSelection]`, which can be created like this:

```
val initialContacts = Set(
  system.actorSelection("akka.tcp://OtherSys@host1:2552/user/receptionist"),
  system.actorSelection("akka.tcp://OtherSys@host2:2552/user/receptionist"))
```

You will probably define the address information of the initial contact points in configuration or system property.

ClusterReceptionistExtension

In the example above the receptionist is started and accessed with the `akka.contrib.pattern.ClusterReceptionistExtension`. That is convenient and perfectly fine in most cases, but it can be good to know that it is possible to start the `akka.contrib.pattern.ClusterReceptionist` actor as an ordinary actor and you can have several different receptionists at the same time, serving different types of clients.

The `ClusterReceptionistExtension` can be configured with the following properties:

```
# Settings for the ClusterReceptionistExtension
akka.contrib.cluster.receptionist {
  # Actor name of the ClusterReceptionist actor, /user/receptionist
  name = receptionist

  # Start the receptionist on members tagged with this role.
  # All members are used if undefined or empty.
  role = ""

  # The receptionist will send this number of contact points to the client
  number-of-contacts = 3

  # The actor that tunnel response messages to the client will be stopped
  # after this time of inactivity.
  response-tunnel-receive-timeout = 30s
}
```

Note that the `ClusterReceptionistExtension` uses the `DistributedPubSubExtension`, which is described in *Distributed Publish Subscribe in Cluster*.

It is recommended to load the extension when the actor system is started by defining it in the `akka.extensions` configuration property:

```
akka.extensions = ["akka.contrib.pattern.ClusterReceptionistExtension"]
```

Aggregator Pattern

The aggregator pattern supports writing actors that aggregate data from multiple other actors and updates its state based on those responses. It is even harder to optionally aggregate more data based on the runtime state of the actor or take certain actions (sending another message and get another response) based on two or more previous responses.

A common thought is to use the ask pattern to request information from other actors. However, ask creates another actor specifically for the ask. We cannot use a callback from the future to update the state as the thread executing the callback is not defined. This will likely close-over the current actor.

The aggregator pattern solves such scenarios. It makes sure we're acting from the same actor in the scope of the actor receive.

Introduction

The aggregator pattern allows match patterns to be dynamically added to and removed from an actor from inside the message handling logic. All match patterns are called from the receive loop and run in the thread handling the incoming message. These dynamically added patterns and logic can safely read and/or modify this actor's mutable state without risking integrity or concurrency issues.

Usage

To use the aggregator pattern, you need to extend the `Aggregator` trait. The trait takes care of `receive` and actors extending this trait should not override `receive`. The trait provides the `expect`, `expectOnce`, and `unexpected` calls. The `expect` and `expectOnce` calls return a handle that can be used for later de-registration by passing the handle to `unexpected`.

`expect` is often used for standing matches such as catching error messages or timeouts.

```
expect {
  case TimedOut => collectBalances(force = true)
}
```

`expectOnce` is used for matching the initial message as well as other requested messages

```
expectOnce {
  case GetCustomerAccountBalances(id, types) =>
    new AccountAggregator(sender, id, types)
  case _ =>
    sender ! CantUnderstand
    context.stop(self)
}
```

```
def fetchCheckingAccountsBalance() {
  context.actorOf(Props[CheckingAccountProxy]) ! GetAccountBalances(id)
  expectOnce {
    case CheckingAccountBalances(balances) =>
      results += (Checking -> balances)
      collectBalances()
  }
}
```

`unexpected` can be used for expecting multiple responses until a timeout or when the logic dictates such an expect no longer applies.

```
val handle = expect {
  case Response(name, value) =>
    values += value
    if (values.size > 3) processList()
  case TimedOut => processList()
}

def processList() {
  unexpected(handle)

  if (values.size > 0) {
    context.actorSelection("/user/evaluator") ! values.toList
  }
}
```

```

expectOnce {
  case EvaluationResults(name, eval) => processFinal(eval)
}
} else processFinal(List.empty[Int])
}

```

As the name eludes, `expect` keeps the partial function matching any received messages until `unexpected` is called or the actor terminates, whichever comes first. On the other hand, `expectOnce` removes the partial function once a match has been established.

It is a common pattern to register the initial `expectOnce` from the construction of the actor to accept the initial message. Once that message is received, the actor starts doing all aggregations and sends the response back to the original requester. The aggregator should terminate after the response is sent (or timed out). A different original request should use a different actor instance.

As you can see, aggregator actors are generally stateful, short lived actors.

Sample Use Case - AccountBalanceRetriever

This example below shows a typical and intended use of the aggregator pattern.

```

import scala.collection._
import scala.concurrent.duration._
import scala.math.BigDecimal.int2bigDecimal

import akka.actor._
/**
 * Sample and test code for the aggregator patter.
 * This is based on Jamie Allen's tutorial at
 * http://jaxenter.com/tutorial-asynchronous-programming-with-akka-actors-46220.html
 */

sealed trait AccountType
case object Checking extends AccountType
case object Savings extends AccountType
case object MoneyMarket extends AccountType

case class GetCustomerAccountBalances(id: Long, accountTypes: Set[AccountType])
case class GetAccountBalances(id: Long)

case class AccountBalances(accountType: AccountType,
                           balance: Option[List[(Long, BigDecimal)]])

case class CheckingAccountBalances(balances: Option[List[(Long, BigDecimal)]])
case class SavingsAccountBalances(balances: Option[List[(Long, BigDecimal)]])
case class MoneyMarketAccountBalances(balances: Option[List[(Long, BigDecimal)]])

case object TimedOut
case object CantUnderstand

class SavingsAccountProxy extends Actor {
  def receive = {
    case GetAccountBalances(id: Long) =>
      sender ! SavingsAccountBalances(Some(List((1, 150000), (2, 29000))))
  }
}

class CheckingAccountProxy extends Actor {
  def receive = {
    case GetAccountBalances(id: Long) =>
      sender ! CheckingAccountBalances(Some(List((3, 15000))))
  }
}

```

```

class MoneyMarketAccountProxy extends Actor {
  def receive = {
    case GetAccountBalances(id: Long) =>
      sender ! MoneyMarketAccountBalances(None)
  }
}

class AccountBalanceRetriever extends Actor with Aggregator {

  import context._

  expectOnce {
    case GetCustomerAccountBalances(id, types) =>
      new AccountAggregator(sender, id, types)
    case _ =>
      sender ! CantUnderstand
      context.stop(self)
  }

  class AccountAggregator(originalSender: ActorRef,
                          id: Long, types: Set[AccountType]) {

    val results =
      mutable.ArrayBuffer.empty[(AccountType, Option[List[(Long, BigDecimal)])])

    if (types.size > 0)
      types foreach {
        case Checking    => fetchCheckingAccountsBalance()
        case Savings     => fetchSavingsAccountsBalance()
        case MoneyMarket => fetchMoneyMarketAccountsBalance()
      }
    else collectBalances() // Empty type list yields empty response

    context.system.scheduler.scheduleOnce(1 second, self, TimedOut)
    expect {
      case TimedOut => collectBalances(force = true)
    }

    def fetchCheckingAccountsBalance() {
      context.actorOf(Props[CheckingAccountProxy]) ! GetAccountBalances(id)
      expectOnce {
        case CheckingAccountBalances(balances) =>
          results += (Checking -> balances)
          collectBalances()
      }
    }

    def fetchSavingsAccountsBalance() {
      context.actorOf(Props[SavingsAccountProxy]) ! GetAccountBalances(id)
      expectOnce {
        case SavingsAccountBalances(balances) =>
          results += (Savings -> balances)
          collectBalances()
      }
    }

    def fetchMoneyMarketAccountsBalance() {
      context.actorOf(Props[MoneyMarketAccountProxy]) ! GetAccountBalances(id)
      expectOnce {
        case MoneyMarketAccountBalances(balances) =>
          results += (MoneyMarket -> balances)
          collectBalances()
      }
    }
  }
}

```

```

}

def collectBalances(force: Boolean = false) {
  if (results.size == types.size || force) {
    originalSender ! results.toList // Make sure it becomes immutable
    context.stop(self)
  }
}
}
}
}

```

Sample Use Case - Multiple Response Aggregation and Chaining

A shorter example showing aggregating responses and chaining further requests.

```

case class InitialRequest(name: String)
case class Request(name: String)
case class Response(name: String, value: String)
case class EvaluationResults(name: String, eval: List[Int])
case class FinalResponse(qualifiedValues: List[String])

/**
 * An actor sample demonstrating use of unexpect and chaining.
 * This is just an example and not a complete test case.
 */
class ChainingSample extends Actor with Aggregator {

  expectOnce {
    case InitialRequest(name) => new MultipleResponseHandler(sender, name)
  }

  class MultipleResponseHandler(originalSender: ActorRef, propName: String) {

    import context.dispatcher
    import collection.mutable.ArrayBuffer

    val values = ArrayBuffer.empty[String]

    context.actorSelection("/user/request_proxies") ! Request(propName)
    context.system.scheduler.scheduleOnce(50 milliseconds, self, TimedOut)

    val handle = expect {
      case Response(name, value) =>
        values += value
        if (values.size > 3) processList()
      case TimedOut => processList()
    }

    def processList() {
      unexpect(handle)

      if (values.size > 0) {
        context.actorSelection("/user/evaluator") ! values.toList
        expectOnce {
          case EvaluationResults(name, eval) => processFinal(eval)
        }
      } else processFinal(List.empty[Int])
    }

    def processFinal(eval: List[Int]) {
      // Select only the entries coming back from eval

```

```

originalSender ! FinalResponse(eval map values)
context.stop(self)
}
}
}

```

Pitfalls

- The current implementation does not match the sender of the message. This is designed to work with `ActorSelection` as well as `ActorRef`. Without the sender, there is a chance a received message can be matched by more than one partial function. The partial function that was registered via `expect` or `expectOnce` first (chronologically) and is not yet de-registered by `unexpected` takes precedence in this case. Developers should make sure the messages can be uniquely matched or the wrong logic can be executed for a certain message.
- The sender referenced in any `expect` or `expectOnce` logic refers to the sender of that particular message and not the sender of the original message. The original sender still needs to be saved so a final response can be sent back.
- `context.become` is not supported when extending the `Aggregator` trait.
- We strongly recommend against overriding `receive`. If your use case really dictates, you may do so with extreme caution. Always provide a pattern match handling aggregator messages among your `receive` pattern matches, as follows:

```

case msg if handleMessage(msg) => // noop
// side effects of handleMessage does the actual match

```

Sorry, there is not yet a Java implementation of the aggregator pattern available.

8.2.3 Suggested Way of Using these Contributions

Since the Akka team does not restrict updates to this subproject even during otherwise binary compatible releases, and modules may be removed without deprecation, it is suggested to copy the source files into your own code base, changing the package name. This way you can choose when to update or which fixes to include (to keep binary compatibility if needed) and later releases of Akka do not potentially break your application.

8.2.4 Suggested Format of Contributions

Each contribution should be a self-contained unit, consisting of one source file or one exclusively used package, without dependencies to other modules in this subproject; it may depend on everything else in the Akka distribution, though. This ensures that contributions may be moved into the standard distribution individually. The module shall be within a subpackage of `akka.contrib`.

Each module must be accompanied by a test suite which verifies that the provided features work, possibly complemented by integration and unit tests. The tests should follow the *Developer Guidelines* and go into the `src/test/scala` or `src/test/java` directories (with package name matching the module which is being tested). As an example, if the module were called `akka.contrib.pattern.ReliableProxy`, then the test suite should be called `akka.contrib.pattern.ReliableProxySpec`.

Each module must also have proper documentation in *reStructured Text* format. The documentation should be a single `<module>.rst` file in the `akka-contrib/docs` directory, including a link from `index.rst` (this file).

INFORMATION FOR AKKA DEVELOPERS

9.1 Building Akka

This page describes how to build and run Akka from the latest source code.

9.1.1 Get the Source Code

Akka uses [Git](#) and is hosted at [Github](#).

You first need [Git](#) installed on your machine. You can then clone the source repository from <http://github.com/akka/akka>.

For example:

```
git clone git://github.com/akka/akka.git
```

If you have already cloned the repository previously then you can update the code with `git pull`:

```
git pull origin master
```

9.1.2 sbt - Simple Build Tool

Akka is using the excellent [sbt](#) build system. So the first thing you have to do is to download and install [sbt](#). You can read more about how to do that in the [sbt setup](#) documentation.

The [sbt](#) commands that you'll need to build Akka are all included below. If you want to find out more about [sbt](#) and using it for your own projects do read the [sbt documentation](#).

The Akka [sbt](#) build file is `project/AkkaBuild.scala`.

9.1.3 Building Akka

First make sure that you are in the akka code directory:

```
cd akka
```

Building

To compile all the Akka core modules use the `compile` command:

```
sbt compile
```

You can run all tests with the `test` command:

```
sbt test
```

If compiling and testing are successful then you have everything working for the latest Akka development version.

Parallel Execution

By default the tests are executed sequentially. They can be executed in parallel to reduce build times, if hardware can handle the increased memory and cpu usage. Add the following system property to sbt launch script to activate parallel execution:

```
-Dakka.parallelExecution=true
```

Long Running and Time Sensitive Tests

By default are the long running tests (mainly cluster tests) and time sensitive tests (dependent on the performance of the machine it is running on) disabled. You can enable them by adding one of the flags:

```
-Dakka.test.tags.include=long-running  
-Dakka.test.tags.include=timing
```

Or if you need to enable them both:

```
-Dakka.test.tags.include=long-running,timing
```

Publish to Local Ivy Repository

If you want to deploy the artifacts to your local Ivy repository (for example, to use from an sbt project) use the `publish-local` command:

```
sbt publish-local
```

Note: Akka generates class diagrams for the API documentation using ScalaDoc. This needs the `dot` command from the Graphviz software package to be installed to avoid errors. You can disable the diagram generation by adding the flag `-Dakka.scaladoc.diagrams=false`

sbt Interactive Mode

Note that in the examples above we are calling `sbt compile` and `sbt test` and so on, but sbt also has an interactive mode. If you just run `sbt` you enter the interactive sbt prompt and can enter the commands directly. This saves starting up a new JVM instance for each command and can be much faster and more convenient.

For example, building Akka as above is more commonly done like this:

```
% sbt  
[info] Set current project to default (in build file:../../akka/project/plugins/)  
[info] Set current project to akka (in build file:../../akka/)  
> compile  
...  
> test  
...
```

sbt Batch Mode

It's also possible to combine commands in a single call. For example, testing, and publishing Akka to the local Ivy repository can be done with:

```
sbt test publish-local
```

9.1.4 Dependencies

You can look at the Ivy dependency resolution information that is created on `sbt update` and found in `~/.ivy2/cache`. For example, the `~/.ivy2/cache/com.typesafe.akka-akka-remote-compile.xml` file contains the resolution information for the akka-remote module compile dependencies. If you open this file in a web browser you will get an easy to navigate view of dependencies.

9.2 Multi JVM Testing

Supports running applications (objects with main methods) and `ScalaTest` tests in multiple JVMs at the same time. Useful for integration testing where multiple systems communicate with each other.

9.2.1 Setup

The multi-JVM testing is an sbt plugin that you can find at <http://github.com/typesafehub/sbt-multi-jvm>.

You can add it as a plugin by adding the following to your `project/plugins.sbt`:

```
addSbtPlugin("com.typesafe.sbt" % "sbt-multi-jvm" % "0.3.8")
```

You can then add multi-JVM testing to `project/Build.scala` by including the `MultiJvm` settings and config. Please note that `MultiJvm` test sources are located in `src/multi-jvm/...`, and not in `src/test/...`

Here is an example `Build.scala` file for sbt 0.12 that uses the `MultiJvm` plugin:

```
import sbt._
import Keys._
import com.typesafe.sbt.SbtMultiJvm
import com.typesafe.sbt.SbtMultiJvm.MultiJvmKeys.{ MultiJvm }

object ExampleBuild extends Build {

  lazy val buildSettings = Defaults.defaultSettings ++ multiJvmSettings ++ Seq(
    organization := "example",
    version      := "1.0",
    scalaVersion := "2.10.2",
    // make sure that the artifacts don't have the scala version in the name
    crossPaths  := false
  )

  lazy val example = Project(
    id = "example",
    base = file("."),
    settings = buildSettings ++
      Seq(libraryDependencies += Dependencies.example)
  ) configs(MultiJvm)

  lazy val multiJvmSettings = SbtMultiJvm.multiJvmSettings ++ Seq(
    // make sure that MultiJvm test are compiled by the default test compilation
    compile in MultiJvm <=< (compile in MultiJvm) triggeredBy (compile in Test),
    // disable parallel tests
    parallelExecution in Test := false,
    // make sure that MultiJvm tests are executed by the default test target
    executeTests in Test <=<
      ((executeTests in Test), (executeTests in MultiJvm)) map {
        case (_, testResults), (_, multiJvmResults) =>
          val results = testResults ++ multiJvmResults
          (Tests.overall(results.values), results)
      }
  )
}
```

```

)

object Dependencies {
  val example = Seq(
    // ---- application dependencies ----
    "com.typesafe.akka" %% "akka-actor" % "2.2.5" ,
    "com.typesafe.akka" %% "akka-remote" % "2.2.5" ,

    // ---- test dependencies ----
    "com.typesafe.akka" %% "akka-testkit" % "2.2.5" %
      "test" ,
    "com.typesafe.akka" %% "akka-multi-node-testkit" % "2.2.5" %
      "test" ,
    "org.scalatest"      %% "scalatest" % "1.9.1" % "test",
    "junit"              % "junit" % "4.5" % "test"
  )
}
}

```

If you are using sbt 0.13 the multiJvmSettings in the Build.scala file looks like this instead:

```

lazy val multiJvmSettings = SbtMultiJvm.multiJvmSettings ++ Seq(
  // make sure that MultiJvm test are compiled by the default test compilation
  compile in MultiJvm <=< (compile in MultiJvm) triggeredBy (compile in Test),
  // disable parallel tests
  parallelExecution in Test := false,
  // make sure that MultiJvm tests are executed by the default test target
  executeTests in Test <=<=
    ((executeTests in Test), (executeTests in MultiJvm)) map {
      case ((testResults), (multiJvmResults)) =>
        val overall =
          if (testResults.overall.id < multiJvmResults.overall.id)
            multiJvmResults.overall
          else
            testResults.overall
        Tests.Output(overall,
          testResults.events ++ multiJvmResults.events,
          testResults.summaries ++ multiJvmResults.summaries)
    }
)

```

You can specify JVM options for the forked JVMs:

```
jvmOptions in MultiJvm := Seq("-Xmx256M")
```

9.2.2 Running tests

The multi-JVM tasks are similar to the normal tasks: `test`, `test-only`, and `run`, but are under the `multi-jvm` configuration.

So in Akka, to run all the multi-JVM tests in the akka-remote project use (at the sbt prompt):

```
akka-remote-tests/multi-jvm:test
```

Or one can change to the akka-remote-tests project first, and then run the tests:

```
project akka-remote-tests
multi-jvm:test
```

To run individual tests use `test-only`:

```
multi-jvm:test-only akka.remote.RandomRoutedRemoteActor
```

More than one test name can be listed to run multiple specific tests. Tab-completion in sbt makes it easy to complete the test names.

It's also possible to specify JVM options with `test-only` by including those options after the test names and `--`. For example:

```
multi-jvm:test-only akka.remote.RandomRoutedRemoteActor -- -Dsome.option=something
```

9.2.3 Creating application tests

The tests are discovered, and combined, through a naming convention. MultiJvm test sources are located in `src/multi-jvm/...` A test is named with the following pattern:

```
{TestName}MultiJvm{NodeName}
```

That is, each test has `MultiJvm` in the middle of its name. The part before it groups together tests/applications under a single `TestName` that will run together. The part after, the `NodeName`, is a distinguishing name for each forked JVM.

So to create a 3-node test called `Sample`, you can create three applications like the following:

```
package sample

object SampleMultiJvmNode1 {
  def main(args: Array[String]) {
    println("Hello from node 1")
  }
}

object SampleMultiJvmNode2 {
  def main(args: Array[String]) {
    println("Hello from node 2")
  }
}

object SampleMultiJvmNode3 {
  def main(args: Array[String]) {
    println("Hello from node 3")
  }
}
```

When you call `multi-jvm:run sample.Sample` at the sbt prompt, three JVMs will be spawned, one for each node. It will look like this:

```
> multi-jvm:run sample.Sample
...
[info] Starting JVM-Node1 for sample.SampleMultiJvmNode1
[info] Starting JVM-Node2 for sample.SampleMultiJvmNode2
[info] Starting JVM-Node3 for sample.SampleMultiJvmNode3
[JVM-Node1] Hello from node 1
[JVM-Node2] Hello from node 2
[JVM-Node3] Hello from node 3
[success] Total time: ...
```

9.2.4 Changing Defaults

You can change the name of the multi-JVM test source directory by adding the following configuration to your project:

```
unmanagedSourceDirectories in MultiJvm <<=
  Seq(baseDirectory(_ / "src/some_directory_here")).join
```

You can change what the `MultiJvm` identifier is. For example, to change it to `ClusterTest` use the `multiJvmMarker` setting:

```
multiJvmMarker in MultiJvm := "ClusterTest"
```

Your tests should now be named `{TestName}ClusterTest{NodeName}`.

9.2.5 Configuration of the JVM instances

You can define specific JVM options for each of the spawned JVMs. You do that by creating a file named after the node in the test with suffix `.opts` and put them in the same directory as the test.

For example, to feed the JVM options `-Dakka.remote.port=9991` to the `SampleMultiJvmNode1` let's create three `*.opts` files and add the options to them.

`SampleMultiJvmNode1.opts`:

```
-Dakka.remote.port=9991
```

`SampleMultiJvmNode2.opts`:

```
-Dakka.remote.port=9992
```

`SampleMultiJvmNode3.opts`:

```
-Dakka.remote.port=9993
```

9.2.6 ScalaTest

There is also support for creating `ScalaTest` tests rather than applications. To do this use the same naming convention as above, but create `ScalaTest` suites rather than objects with main methods. You need to have `ScalaTest` on the classpath. Here is a similar example to the one above but using `ScalaTest`:

```
package sample

import org.scalatest.WordSpec
import org.scalatest.matchers.MustMatchers

class SpecMultiJvmNode1 extends WordSpec with MustMatchers {
  "A node" should {
    "be able to say hello" in {
      val message = "Hello from node 1"
      message must be("Hello from node 1")
    }
  }
}

class SpecMultiJvmNode2 extends WordSpec with MustMatchers {
  "A node" should {
    "be able to say hello" in {
      val message = "Hello from node 2"
      message must be("Hello from node 2")
    }
  }
}
```

To run just these tests you would call `multi-jvm:test-only sample.Spec` at the `sbt` prompt.

9.2.7 Multi Node Additions

There has also been some additions made to the `SbtMultiJvm` plugin to accommodate the *experimental* module *multi node testing*, described in that section.

9.3 I/O Layer Design

The `akka.io` package has been developed in collaboration between the Akka and `spray.io` teams. Its design incorporates the experiences with the `spray-io` module along with improvements that were jointly developed for more general consumption as an actor-based service.

9.3.1 Requirements

In order to form a general and extensible IO layer basis for a wide range of applications, with Akka remoting and spray HTTP being the initial ones, the following requirements were established as key drivers for the design:

- scalability to millions of concurrent connections
- lowest possible latency in getting data from an input channel into the target actor's mailbox
- maximal throughput
- optional back-pressure in both directions (i.e. throttling local senders as well as allowing local readers to throttle remote senders, where allowed by the protocol)
- a purely actor-based API with immutable data representation
- extensibility for integrating new transports by way of a very lean SPI; the goal is to not force I/O mechanisms into a lowest common denominator but instead allow completely protocol-specific user-level APIs.

9.3.2 Basic Architecture

Each transport implementation will be made available as a separate Akka extension, offering an `ActorRef` representing the initial point of contact for client code. This “manager” accepts requests for establishing a communications channel (e.g. connect or listen on a TCP socket). Each communications channel is represented by one dedicated actor, which is exposed to client code for all interaction with this channel over its entire lifetime.

The central element of the implementation is the transport-specific “selector” actor; in the case of TCP this would wrap a `java.nio.channels.Selector`. The channel actors register their interest in readability or writability of their channel by sending corresponding messages to their assigned selector actor. However, the actual channel reading and writing is performed by the channel actors themselves, which frees the selector actors from time-consuming tasks and thereby ensures low latency. The selector actor's only responsibility is the management of the underlying selector's key set and the actual select operation, which is the only operation to typically block.

The assignment of channels to selectors is performed by the manager actor and remains unchanged for the entire lifetime of a channel. Thereby the management actor “stripes” new channels across one or more selector actors based on some implementation-specific distribution logic. This logic may be delegated (in part) to the selector actors, which could, for example, choose to reject the assignment of a new channel when they consider themselves to be at capacity.

The manager actor creates (and therefore supervises) the selector actors, which in turn create and supervise their channel actors. The actor hierarchy of one single transport implementation therefore consists of three distinct actor levels, with the management actor at the top-, the channel actors at the leaf- and the selector actors at the mid-level.

Back-pressure for output is enabled by allowing the user to specify within its `Write` messages whether it wants to receive an acknowledgement for enqueueing that write to the O/S kernel. Back-pressure for input is enabled by sending the channel actor a message which temporarily disables read interest for the channel until reading is re-enabled with a corresponding resume command. In the case of transports with flow control—like TCP—the

act of not consuming data at the receiving end (thereby causing them to remain in the kernels read buffers) is propagated back to the sender, linking these two mechanisms across the network.

9.3.3 Design Benefits

Staying within the actor model for the whole implementation allows us to remove the need for explicit thread handling logic, and it also means that there are no locks involved (besides those which are part of the underlying transport library). Writing only actor code results in a cleaner implementation, while Akka's efficient actor messaging does not impose a high tax for this benefit. In fact the event-based nature of I/O maps so well to the actor model that we expect clear performance and especially scalability benefits over traditional solutions with explicit thread management and synchronization.

Another benefit of supervision hierarchies is that clean-up of resources comes naturally: shutting down a selector actor will automatically clean up all channel actors, allowing proper closing of the channels and sending the appropriate messages to user-level client actors. `DeathWatch` allows the channel actors to notice the demise of their user-level handler actors and terminate in an orderly fashion in that case as well; this naturally reduces the chances of leaking open channels.

The choice of using `ActorRef` for exposing all functionality entails that these references can be distributed or delegated freely and in general handled as the user sees fit, including the use of remoting and life-cycle monitoring (just to name two).

9.3.4 How to go about Adding a New Transport

The best start is to study the TCP reference implementation to get a good grip on the basic working principle and then design an implementation, which is similar in spirit, but adapted to the new protocol in question. There are vast differences between I/O mechanisms (e.g. compare file I/O to a message broker) and the goal of this I/O layer is explicitly **not** to shoehorn all of them into a uniform API, which is why only the basic architecture ideas are documented here.

9.4 Developer Guidelines

Note: First read [The Akka Contributor Guidelines](#) .

9.4.1 Code Style

The Akka code style follows the [Scala Style Guide](#) . The only exception is the style of block comments:

```
/**
 * Style mandated by "Scala Style Guide"
 */

/**
 * Style adopted in the Akka codebase
 */
```

Akka is using `Scalariform` to format the source code as part of the build. So just hack away and then run `sbt compile` and it will reformat the code according to Akka standards.

9.4.2 Process

- Make sure you have signed the Akka CLA, if not, [sign it online](#).
- Pick a ticket, if there is no ticket for your work then create one first.

- Start working in a feature branch. Name it something like `wip-<ticket number>-<descriptive name>-<your username>`.
- When you are done, create a GitHub Pull-Request towards the targeted branch and email the Akka Mailing List that you want it reviewed
- When there's consensus on the review, someone from the Akka Core Team will merge it.

9.4.3 Commit messages

Please follow these guidelines when creating public commits and writing commit messages.

1. If your work spans multiple local commits (for example; if you do safe point commits while working in a topic branch or work in a branch for long time doing merges/rebases etc.) then please do **not** commit it all but rewrite the history by squashing the commits into a single big commit which you write a good commit message for (like discussed below). Here is a great article for how to do that: <http://sandofsky.com/blog/git-workflow.html>. Every commit should be able to be used in isolation, cherry picked etc.
2. First line should be a descriptive sentence what the commit is doing. It should be possible to fully understand what the commit does by just reading this single line. It is **not** ok to only list the ticket number, type “minor fix” or similar. Include reference to ticket number, prefixed with #, at the end of the first line. If the commit is a **small** fix, then you are done. If not, go to 3.
3. Following the single line description should be a blank line followed by an enumerated list with the details of the commit.

Example:

```
Completed replication over BookKeeper based transaction log. Fixes #XXX

* Details 1
* Details 2
* Details 3
```

9.4.4 Testing

All code that is checked in **should** have tests. All testing is done with `ScalaTest` and `ScalaCheck`.

- Name tests as **Test.scala** if they do not depend on any external stuff. That keeps surefire happy.
- Name tests as **Spec.scala** if they have external dependencies.

There is a testing standard that should be followed: `Ticket001Spec`

Actor TestKit

There is a useful test kit for testing actors: `akka.util.TestKit`. It enables assertions concerning replies received and their timing, there is more documentation in the `akka-testkit` module.

Multi-JVM Testing

Included in the example is an sbt trait for multi-JVM testing which will fork JVMs for multi-node testing. There is support for running applications (objects with main methods) and running `ScalaTest` tests.

NetworkFailureTest

You can use the ‘`NetworkFailureTest`’ trait to test network failure.

9.5 Documentation Guidelines

The Akka documentation uses `reStructuredText` as its markup language and is built using `Sphinx`.

9.5.1 Sphinx

For more details see [The Sphinx Documentation](#)

9.5.2 reStructuredText

For more details see [The reST Quickref](#)

Sections

Section headings are very flexible in reST. We use the following convention in the Akka documentation:

- # (over and under) for module headings
- = for sections
- - for subsections
- ^ for subsubsections
- ~ for subsubsubsections

Cross-referencing

Sections that may be cross-referenced across the documentation should be marked with a reference. To mark a section use `.. _ref-name:` before the section heading. The section can then be linked with `:ref:`ref-name``. These are unique references across the entire documentation.

For example:

```
.. _akka-module:
#####
Akka Module
#####

This is the module documentation.

.. _akka-section:

Akka Section
=====

Akka Subsection
-----

Here is a reference to "akka section": :ref:`akka-section` which will have the
name "Akka Section".
```

9.5.3 Build the documentation

First install `Sphinx`. See below.

Building

For the html version of the docs:

```
sbt sphinx:generate-html
open <project-dir>/akka-docs/target/sphinx/html/index.html
```

For the pdf version of the docs:

```
sbt sphinx:generate-pdf
open <project-dir>/akka-docs/target/sphinx/latex/AkkaJava.pdf
or
open <project-dir>/akka-docs/target/sphinx/latex/AkkaScala.pdf
```

Installing Sphinx on OS X

Install [Homebrew](#)

Install Python and pip:

```
brew install python
/usr/local/share/python/easy_install pip
```

Add the Homebrew Python path to your \$PATH:

```
/usr/local/Cellar/python/2.7.1/bin
```

More information in case of trouble: <https://github.com/mxcl/homebrew/wiki/Homebrew-and-Python>

Install sphinx:

```
pip install sphinx
```

Add sphinx_build to your \$PATH:

```
/usr/local/share/python
```

Install BasicTeX package from: <http://www.tug.org/mactex/morepackages.html>

Add texlive bin to \$PATH:

```
/usr/local/texlive/2012basic/bin/universal-darwin
```

Add missing tex packages:

```
sudo tlmgr update --self
sudo tlmgr install titlesec
sudo tlmgr install framed
sudo tlmgr install threeparttable
sudo tlmgr install wrapfig
sudo tlmgr install helvetic
sudo tlmgr install courier
```

9.6 Team

Name	Role
Jonas Bonér	Founder, Despot, Committer
Viktor Klang	Honorary Member
Roland Kuhn	Project Lead
Patrik Nordwall	Core Team
Björn Antonsson	Core Team
Endre Varga	Core Team
Mathias Doenitz	Committer
Johannes Rudolph	Committer
Raymond Roostenburg	Committer
Piotr Gabryanczyk	Committer
Helena Edelson	Committer
Henrik Engström	Alumnus
Peter Vlugter	Alumnus
Martin Krasser	Alumnus
Derek Williams	Alumnus
Debasish Ghosh	Alumnus
Ross McDonald	Alumnus
Eckhart Hertzler	Alumnus
Mikael Höggqvist	Alumnus
Tim Perrett	Alumnus
Jeanfrancois Arcand	Alumnus
Jan Van Besien	Alumnus
Michael Kober	Alumnus
Peter Veentjer	Alumnus
Irmo Manie	Alumnus
Heiko Seeberger	Alumnus
Hiram Chirino	Alumnus
Scott Clasen	Alumnus

PROJECT INFORMATION

10.1 Migration Guides

10.1.1 Migration Guide 1.3.x to 2.0.x

Migration from 1.3.x to 2.0.x is described in the [documentation of 2.0](#).

10.1.2 Migration Guide 2.0.x to 2.1.x

Migration from 2.0.x to 2.1.x is described in the [documentation of 2.1](#).

10.1.3 Migration Guide 2.1.x to 2.2.x

The 2.2 release contains several structural changes that require some simple, mechanical source-level changes in client code.

When migrating from 1.3.x to 2.1.x you should first follow the instructions for migrating *1.3.x to 2.0.x* and then *2.0.x to 2.1.x*.

Deprecated Closure-Taking Props

`Props` instances used to contain a closure which produces an `Actor` instance when invoked. This approach is flawed in that closures are usually created in-line and thus carry a reference to their enclosing object; this is not well known among programmers, in particular it can be surprising that innocent-looking actor creation should not be serializable, e.g. if the enclosing class is an actor. Another issue which came up often during reviews is that these actor creators inadvertently close over the `Actor`'s `this` reference for calling methods on it, which is inherently unsafe.

Another reason for changing the underlying implementation is that `Props` now carries information about which class of actor will be created, allowing the extraction of mailbox type requirements (e.g. when using the `Stash`) before trying to create the actor. Being based on the actor class and a list of constructor arguments also allows these arguments to be serialized according to the configured serializer bindings instead of mandating Java serialization (which was used previously).

What changes for Java?

A new method `Props.create` has been introduced with two overloads:

```
Props.create(MyActor.class, arg1, arg2, ...);  
// or  
Props.create(new MyActorCreator(args ...));
```

In the first case the existence of a constructor signature matching the supplied arguments is verified at Props construction time. In the second case it is verified that `MyActorCreator` (which must be a `akka.japi.Creator<? extends Actor>`) is a static class. In both cases failure is signaled by throwing a `IllegalArgumentException`.

The constructors of `Props` have been deprecated to facilitate migration.

The `withCreator` methods have been deprecated. The functionality is available by using `Props.create(...).withDeploy(oldProps.deploy());`.

`UntypedActorFactory` has been deprecated in favor of the more precisely typed `Creator`.

What changes for Scala?

The case class signature of `Props` has been changed to only contain a `Deploy`, a `Class[_]` and an immutable `Seq[Any]` (the constructor arguments for the class). The old factory and extractor methods have been deprecated.

Properly serializable `Props` can now be created for actors which take constructor arguments by using `Props(classOf[MyActor], arg1, arg2, ...)`. In a future update—possibly within the 2.2.x timeframe—we plan to introduce a macro which will transform the by-name argument to `Props(new MyActor(...))` into a call to the former.

The `withCreator` methods have been deprecated. The functionality is available by using `Props(...).withDeploy(oldProps.deploy)`.

Immutable everywhere

Akka has in 2.2 been refactored to require `scala.collection.immutable` data structures as much as possible, this leads to fewer bugs and more opportunity for sharing data safely.

Search	Replace with
<code>akka.japi.Util.arrayToSeq</code>	<code>akka.japi.Util.immutableSeq</code>

If you need to convert from Java to `scala.collection.immutable.Seq` or `scala.collection.immutable.Iterable` you should use `akka.japi.Util.immutableSeq(...)`, and if you need to convert from Scala you can simply switch to using immutable collections yourself or use the `to[immutable.<collection-type>]` method.

ActorContext & ActorRefFactory Dispatcher

The return type of `ActorContext`'s and `ActorRefFactory`'s `dispatcher`-method now returns `ExecutionContext` instead of `MessageDispatcher`.

Removed Fallback to Default Dispatcher

If deploying an actor with a specific dispatcher, e.g. `Props(...).withDispatcher("d")`, then it would previously fall back to `akka.actor.default-dispatcher` if no configuration section for `d` could be found.

This was beneficial for preparing later deployment choices during development by grouping actors on dispatcher IDs but not immediately configuring those. Akka 2.2 introduces the possibility to add dispatcher configuration to the `akka.actor.deployment` section, making this unnecessary.

The fallback was removed because in many cases its application was neither intended nor noticed.

Changed Configuration Section for Dispatcher & Mailbox

The `mailbox` configuration defaults moved from `akka.actor.default-dispatcher` to `akka.actor.default-mailbox`. You will not have to change anything unless your configuration overrides a setting in the default dispatcher section.

The `mailbox-type` now requires a fully-qualified class name for the mailbox to use. The special words `bounded` and `unbounded` are retained for a migration period throughout the 2.2 series.

API changes to FSM and TestFSMRef

The `timerActive_?` method has been deprecated in both the `FSM` trait and the `TestFSMRef` class. You should now use the `isTimerActive` method instead. The old method will remain throughout 2.2.x. It will be removed in Akka 2.3.

ThreadPoolConfigBuilder

`akka.dispatch.ThreadPoolConfigBuilder` companion object has been removed, and with it the `conf_?` method that was essentially only a type-inferencer aid for creation of optional transformations on `ThreadPoolConfigBuilder`. Instead use: `option.map(o => (t: ThreadPoolConfigBuilder) => t.op(o))`.

Scheduler

Akka's `Scheduler` has been augmented to also include a `sender` when scheduling to send messages, this should work Out-Of-The-Box for Scala users, but for Java Users you will need to manually provide the `sender` – as usual use `null` to designate “no sender” which will behave just as before the change.

ZeroMQ ByteString

`akka.zeromq.Frame` and the use of `Seq[Byte]` in the API has been removed and is replaced by `akka.util.ByteString`.

`ZMQMessage.firstFrameAsString` has been removed, please use `ZMQMessage.frames` or `ZMQMessage.frame(int)` to access the frames.

Brand new Agents

Akka's `Agent` has been rewritten to improve the API and to remove the need to manually `close` an `Agent`. It's also now an abstract class with the potential for subtyping and has a new factory method allowing Java to correctly infer the type of the `Agent`. The Java API has also been harmonized so both Java and Scala call the same methods.

Old Java API	New Java API
<pre>new Agent<type>(value, actorSystem) agent.update(newValue) agent.future(Timeout) agent.await(Timeout) agent.send(Function) agent.sendOff(Function, ExecutionContext) agent.alter(Function, Timeout) agent.alterOff(Function, Timeout, ExecutionContext) agent.map(Function) agent.flatMap(Function) agent.foreach(Procedure) agent.suspend() agent.resume() agent.close()</pre>	<pre>Agent.create(value, executionContext) agent.send(newValue) agent.future() Await.result(agent.future(), Timeout) agent.send(Mapper) agent.sendOff(Mapper, ExecutionContext) agent.alter(Mapper) agent.alter(Mapper, ExecutionContext) agent.map(Mapper) agent.flatMap(Mapper) agent.foreach(Foreach) No replacement, pointless feature No replacement, pointless feature No replacement, not needed in new implementation</pre>
Old Scala API	New Scala API
<pre>Agent[T](value) (implicit ActorSystem) agent.update(newValue) agent.alterOff(Function1) (Timeout, ExecutionContext) agent.await(Timeout) agent.future(Timeout) agent.suspend() agent.resume() agent.close()</pre>	<pre>Agent[T](value) (implicit ExecutionContext) agent.send(newValue) agent.alterOff(Function1) (ExecutionContext) Await.result(agent.future, Timeout) agent.future No replacement, pointless feature No replacement, pointless feature No replacement, not needed in new implementation</pre>

event-handlers renamed to loggers

If you have defined custom event handlers (loggers) in your configuration you need to change `akka.event-handlers` to `akka.loggers` and `akka.event-handler-startup-timeout` to `akka.logger-startup-timeout`.

The SLF4J logger has been renamed from `akka.event.slf4j.Slf4jEventHandler` to `akka.event.slf4j.Slf4jLogger`.

The `java.util.logging` logger has been renamed from `akka.contrib.jul.JavaLoggingEventHandler` to `akka.contrib.jul.JavaLogger`.

Remoting

The remoting subsystem of Akka has been replaced in favor of a more flexible, pluggable driver based implementation. This has required some changes to the configuration sections of `akka.remote`, the format of Akka remote addresses and the Akka protocol itself.

The internal communication protocol of Akka has been evolved into a completely standalone entity, not tied to any particular transport. This change has the effect that Akka 2.2 remoting is no longer able to directly communicate with older versions.

The `akka.remote.transport` configuration key has been removed as the remoting system itself is no longer replaceable. Custom transports are now pluggable via the `akka.remote.enabled-transports` key (see

the `akka.remote.Transport` SPI and the documentation of remoting for more detail on drivers). The transport loaded by default is a Netty based TCP driver similar in functionality to the default remoting in Akka 2.1.

Transports are now fully pluggable through drivers, therefore transport specific settings like listening ports now live in the namespace of their driver configuration. In particular TCP related settings are now under `akka.remote.netty.tcp`.

As a result of being able to replace the transport protocol, it is now necessary to include the protocol information in Akka URLs for remote addresses. Therefore a remote address of `akka://remote-sys@remotehost:2552/user/actor` has to be changed to `akka.tcp://remote-sys@remotehost:2552/user/actor` if the remote system uses TCP as transport. If the other system uses SSL on top of TCP, the correct address would be `akka.ssl.tcp://remote-sys@remotehost:2552/user/actor`.

Remote lifecycle events have been changed to a more coarse-grained, simplified model. All remoting events are subclasses of `akka.remote.RemotingLifecycle`. Events related to the lifecycle of *associations* (formerly called *connections*) be it inbound or outbound are subclasses of `akka.remote.AssociationEvent` (which is in turn a subclass of `RemotingLifecycle`). The direction of the association (inbound or outbound) triggering an `AssociationEvent` is available via the `inbound` boolean field of the event.

Note: The change in terminology from “Connection” to “Association” reflects the fact that the remoting subsystem may use connectionless transports, but an association similar to transport layer connections is maintained between endpoints by the Akka protocol.

New configuration settings are also available, see the remoting documentation for more detail: *remoting-scala*

Use `actorSelection` instead of `actorFor`

`actorFor` is deprecated in favor of `actorSelection` because actor references acquired with `actorFor` behave differently for local and remote actors. In the case of a local actor reference, the named actor needs to exist before the lookup, or else the acquired reference will be an `EmptyLocalActorRef`. This will be true even if an actor with that exact path is created after acquiring the actor reference. For remote actor references acquired with `actorFor` the behaviour is different and sending messages to such a reference will under the hood look up the actor by path on the remote system for every message send.

Messages can be sent via the `ActorSelection` and the path of the `ActorSelection` is looked up when delivering each message. If the selection does not match any actors the message will be dropped.

To acquire an `ActorRef` for an `ActorSelection` you need to send a message to the selection and use the `sender` reference of the reply from the actor. There is a built-in `Identify` message that all Actors will understand and automatically reply to with a `ActorIdentity` message containing the `ActorRef`.

You can also acquire an `ActorRef` for an `ActorSelection` with the `resolveOne` method of the `ActorSelection`. It returns a `Future` of the matching `ActorRef` if such an actor exists. It is completed with failure `[[akka.actor.ActorNotFound]]` if no such actor exists or the identification didn't complete within the supplied *timeout*.

Read more about `actorSelection` in *docs for Java* or *docs for Scala*.

ActorRef equality and sending to remote actors

Sending messages to an `ActorRef` must have the same semantics no matter if the target actor is located on a remote host or in the same `ActorSystem` in the same JVM. This was not always the case. For example when the target actor is terminated and created again under the same path. Sending to local references of the previous incarnation of the actor will not be delivered to the new incarnation, but that was the case for remote references. The reason was that the target actor was looked up by its path on every message delivery and the path didn't distinguish between the two incarnations of the actor. This has been fixed, and messages sent to a remote reference that points to a terminated actor will not be delivered to a new actor with the same path.

Equality of `ActorRef` has been changed to match the intention that an `ActorRef` corresponds to the target actor instance. Two actor references are compared equal when they have the same path and point to the same actor

incarnation. A reference pointing to a terminated actor does not compare equal to a reference pointing to another (re-created) actor with the same path. Note that a restart of an actor caused by a failure still means that it's the same actor incarnation, i.e. a restart is not visible for the consumer of the `ActorRef`.

Equality in 2.1 was only based on the path of the `ActorRef`. If you need to keep track of actor references in a collection and do not care about the exact actor incarnation you can use the `ActorPath` as key, because the identifier of the target actor is not taken into account when comparing actor paths.

Remote actor references acquired with `actorFor` do not include the full information about the underlying actor identity and therefore such references do not compare equal to references acquired with `actorOf`, `sender`, or `context.self`. Because of this `actorFor` is deprecated, as explained in *Use actorSelection instead of actorFor*.

Note that when a parent actor is restarted its children are by default stopped and re-created, i.e. the child after the restart will be a different incarnation than the child before the restart. This has always been the case, but in some situations you might not have noticed, e.g. when comparing such actor references or sending messages to remote deployed children of a restarted parent.

This may also have implications if you compare the `ActorRef` received in a `Terminated` message with an expected `ActorRef`.

The following will not match:

```
val ref = context.actorFor("akka.tcp://actorSystemName@10.0.0.1:2552/user/actorName")

def receive = {
  case Terminated(`ref`) => // ...
}
```

Instead, use `actorSelection` followed by `identify` request, and watch the verified actor reference:

```
val selection = context.actorSelection(
  "akka.tcp://actorSystemName@10.0.0.1:2552/user/actorName")
selection ! Identify(None)
var ref: ActorRef = _

def receive = {
  case ActorIdentity(_, Some(actorRef)) =>
    ref = actorRef
    context watch ref
  case ActorIdentity(_, None) => // not alive
  case Terminated(r) if r == ref => // ...
}
```

Use `watch` instead of `isTerminated`

`ActorRef.isTerminated` is deprecated in favor of `ActorContext.watch` because `isTerminated` behaves differently for local and remote actors.

DeathWatch Semantics are Simplified

DeathPactException is now Fatal

Previously an unhandled `Terminated` message which led to a `DeathPactException` to be thrown would be answered with a `Restart` directive by the default supervisor strategy. This is not intuitive given the name of the exception and the Erlang linking feature by which it was inspired. The default strategy has thus be changed to return `Stop` in this case.

It can be argued that previously the actor would likely run into a restart loop because watching a terminated actor would lead to a `DeathPactException` immediately again.

Unwatching now Prevents Reception of Terminated

Previously calling `ActorContext.unwatch` would unregister lifecycle monitoring interest, but if the target actor had terminated already the `Terminated` message had already been enqueued and would be received later—possibly leading to a `DeathPactException`. This behavior has been modified such that the `Terminated` message will be silently discarded if `unwatch` is called before processing the `Terminated` message. Therefore the following is now safe:

```
context.stop(target)
context.unwatch(target)
```

Dispatcher and Mailbox Implementation Changes

This point is only relevant if you have implemented a custom mailbox or dispatcher and want to migrate that to Akka 2.2. The constructor signature of `MessageDispatcher` has changed, it now takes a `MessageDispatcherConfigurator` instead of `DispatcherPrerequisites`. Its `createMailbox` method now receives one more argument of type `MailboxType`, which is the mailbox type determined by the `ActorRefProvider` for the actor based on its deployment. The `DispatcherPrerequisites` now include a `Mailboxes` instance which can be used for resolving mailbox references. The constructor signatures of the built-in dispatcher implementation have been adapted accordingly. The traits describing mailbox semantics have been separated from the implementation traits.

gracefulStop Pattern Changed

The `gracefulStop` pattern was refactored to not need an implicit `ActorSystem` anymore.

The `gracefulStop` pattern now supports customized stop messages to be sent instead of `PoisonPill`.

10.2 Issue Tracking

Akka is using `Assembla` as its issue tracking system.

10.2.1 Browsing

Tickets

You can find the Akka tickets [here](#)

Roadmaps

The roadmap for each Akka milestone is [here](#)

10.2.2 Creating tickets

In order to create tickets you need to do the following:

[Register here](#) then log in

Then you also need to become a “Watcher” of the Akka space.

[Link to create a new ticket](#)

Thanks a lot for reporting bugs and suggesting features. *Please include the versions of Scala and Akka and relevant configuration files.*

10.3 Licenses

10.3.1 Akka License

This software is licensed under the Apache 2 license, quoted below.

```
Copyright 2009–2013 Typesafe Inc. <http://www.typesafe.com>
```

```
Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at
```

```
http://www.apache.org/licenses/LICENSE-2.0
```

```
Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.
```

10.3.2 Akka Committer License Agreement

All committers have signed this [CLA](#). It can be [signed online](#).

10.3.3 Licenses for Dependency Libraries

Each dependency and its license can be seen in the project build file (the comment on the side of each dependency): <https://github.com/akka/akka/blob/master/project/AkkaBuild.scala#L497>

10.4 Sponsors

10.4.1 Typesafe

Typesafe is the company behind the Akka Project, Scala Programming Language, Play Web Framework, Scala IDE, Simple Build Tool and many other open source projects. It also provides the Typesafe Stack, a full-featured development stack consisting of AKka, Play and Scala. Learn more at typesafe.com.

10.4.2 YourKit

YourKit is kindly supporting open source projects with its full-featured Java Profiler.

YourKit, LLC is the creator of innovative and intelligent tools for profiling Java and .NET applications. Take a look at YourKit's leading software products: [YourKit Java Profiler](#) and [YourKit .NET Profiler](#)

10.5 Project

10.5.1 Commercial Support

Commercial support is provided by [Typesafe](#). Akka is now part of the [Typesafe Stack](#).

10.5.2 Mailing List

Akka User Google Group

Akka Developer Google Group

10.5.3 Downloads

<http://typesafe.com/stack/downloads/akka/>

10.5.4 Source Code

Akka uses Git and is hosted at [Github](#).

- Akka: clone the Akka repository from <http://github.com/akka/akka>

10.5.5 Releases Repository

All Akka releases are published via Sonatype to Maven Central, see search.maven.org

10.5.6 Snapshots Repository

Nightly builds are available in <http://repo.akka.io/snapshots/> as both SNAPSHOT and timestamped versions.

For timestamped versions, pick a timestamp from http://repo.akka.io/snapshots/com/typesafe/akka/akka-actor_2.10/. All Akka modules that belong to the same build have the same timestamp.

sbt definition of snapshot repository

Make sure that you add the repository to the sbt resolvers:

```
resolvers += "Typesafe Snapshots" at "http://repo.akka.io/snapshots/"
```

Define the library dependencies with the timestamp as version. For example:

```
libraryDependencies += "com.typesafe.akka" % "akka-remote_2.10" %  
  "2.1-20121016-001042"
```

maven definition of snapshot repository

Make sure that you add the repository to the maven repositories in pom.xml:

```
<repositories>  
  <repository>  
    <id>akka-snapshots</id>  
    <name>Akka Snapshots</name>  
    <url>http://repo.akka.io/snapshots/</url>  
    <layout>default</layout>  
  </repository>  
</repositories>
```

Define the library dependencies with the timestamp as version. For example:

```
<dependencies>
  <dependency>
    <groupId>com.typesafe.akka</groupId>
    <artifactId>akka-remote_2.10</artifactId>
    <version>2.1-20121016-001042</version>
  </dependency>
</dependencies>
```

ADDITIONAL INFORMATION

11.1 Books

- *Akka in Action*, by Raymond Roostenburg and Rob Bakker, Manning Publications Co., ISBN: 9781617291012, est fall 2013
- *Akka Concurrency*, by Derek Wyatt, artima developer, ISBN: 0981531660, est April 2013
- *Akka Essentials*, by Munish K. Gupta, PACKT Publishing, ISBN: 1849518289, October 2012

11.2 Here is a list of recipes for all things Akka

- Martin Krassers Akka Event Sourcing example

11.3 Other Language Bindings

11.3.1 JRuby

Read more here: <https://github.com/iconara/mikka>.

11.3.2 Groovy/Groovy++

Read more here: <https://gist.github.com/620439>.

11.3.3 Clojure

Read more here: <http://blog.darevay.com/2011/06/clojure-and-akka-a-match-made-in/>.

11.4 Akka in OSGi

11.4.1 Configuring the OSGi Framework

To use Akka in an OSGi environment, the `org.osgi.framework.bootdelegation` property must be set to always delegate the `sun.misc` package to the boot classloader instead of resolving it through the normal OSGi class space.

11.4.2 Activator

To bootstrap Akka inside an OSGi environment, you can use the `akka.osgi.AkkaSystemActivator` class to conveniently set up the ActorSystem.

```
import akka.actor.{ Props, ActorSystem }
import org.osgi.framework.BundleContext
import akka.osgi.AkkaSystemActivator

class Activator extends ActorSystemActivator {

  def configure(context: BundleContext, system: ActorSystem) {
    // optionally register the ActorSystem in the OSGi Service Registry
    registerService(context, system)

    val someActor = system.actorOf(Props[SomeActor], name = "someName")
    someActor ! SomeMessage
  }
}
```

11.4.3 Blueprint

For the Apache Aries Blueprint implementation, there's also a namespace handler available. The namespace URI is `http://akka.io/xmlns/blueprint/v1.0.0` and it can be used to set up an ActorSystem.

```
<?xml version="1.0" encoding="UTF-8"?>
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0"
  xmlns:akka="http://akka.io/xmlns/blueprint/v1.0.0">

  <akka:actor-system name="BlueprintSystem" />

  <akka:actor-system name="BlueprintSystemWithConfig">
    <akka:config>
      some.config {
        key=value
      }
    </akka:config>
  </akka:actor-system>
</blueprint>
```

11.5 Incomplete List of HTTP Frameworks

11.5.1 Play

The [Play framework](#) is built using Akka, and is well suited for building both full web applications as well as REST services.

11.5.2 Spray

The [Spray toolkit](#) is built using Akka, and is a minimalistic HTTP/REST layer.

11.5.3 Akka Mist

If you are using Akka Mist (Akka's old HTTP/REST module) with Akka 1.x and wish to upgrade to 2.x there is now a port of Akka Mist to Akka 2.x. You can find it [here](#).

11.5.4 Other Alternatives

There are a bunch of other alternatives for using Akka with HTTP/REST. You can find some of them among the [Community Projects](#).